


Almendra Linear Suspension 3

Designed by Patricia Urquiola, 2022

48W - 1755lm - 2700K - CRI> 95

Suspension lamp emitting diffused light in a linear composition. Aluminium tubular structure with CNC-machined terminals in matt or metallised finish. Integrated Edge Lighting technology. Light units can rotate in 60° steps to adjust emission direction. Matt white metal ceiling rose with integrated electronics supporting 1–10 V, DALI or push-dim dimming.

Almendra by Patricia Urquiola is a modular lighting system inspired by the almond tree, from which it takes its name. Its softly curved modules recall seeds or shells, natural yet mechanical in form, arranged in linear or branching compositions. A synthesis of poetry and sustainability, it reflects recurring themes in Urquiola's work, brought to life through beautiful design and advanced technology. Winner of a Stylepark Selected Award 2022.

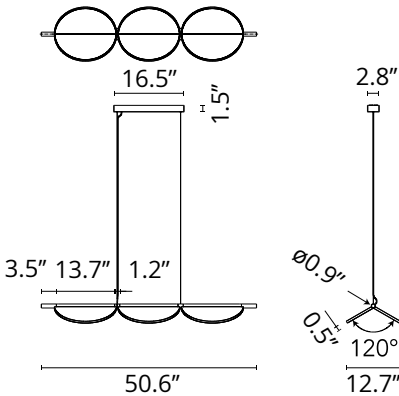

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607048665
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	48
System flux (lm)	1755

Physical

Color	Off-white
Length (in)	50.63
Cord color	Clear
Cord length (in)	110.236
Canopy width (in)	3.937
Canopy height (in)	1.732
Net weight (lb)	15.96
Gross weight (lb)	27.65
Package volume (in)	9051.69
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)

Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class E



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Spare Parts

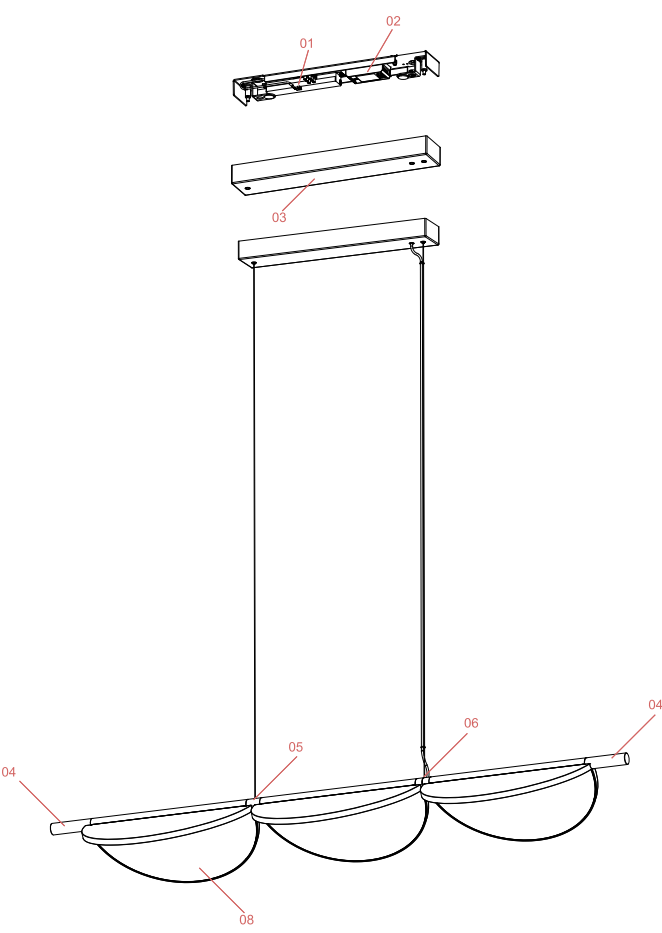

- | | | |
|-----|--|-----------|
| 04. | Almendra White terminal joint L90 | RF32773 |
| 05. | Almendra wiring and connections white assembly | RF32530 |
| 06. | Almendra white suspension wiring assembly | RF32521 |
| 08. | Almendra Suspension White body assembly | RF32514 |
| 09. | Kit with screws and allen key | RF3160100 |



RF32773

Almendra White terminal joint
L90



RF32530

Almendra wiring and connections
white assembly



RF32521

Almendra white suspension
wiring assembly



RF32514

Almendra Suspension White body
assembly



RF3160100

Kit with screws and allen key

Almendra Linear Suspension 4

Designed by Patricia Urquiola, 2022

63W - 2340lm - 2700K - CRI> 95

Suspension lamp emitting diffused light in a linear composition. Aluminium tubular structure with CNC-machined terminals in matt or metallised finish. Integrated Edge Lighting technology. Light units can rotate in 60° steps to adjust emission direction. Matt white metal ceiling rose with integrated electronics supporting 1–10 V, DALI or push-dim dimming.

Almendra by Patricia Urquiola is a modular lighting system inspired by the almond tree, from which it takes its name. Its softly curved modules recall seeds or shells, natural yet mechanical in form, arranged in linear or branching compositions. A synthesis of poetry and sustainability, it reflects recurring themes in Urquiola’s work, brought to life through beautiful design and advanced technology. Winner of a Stylepark Selected Award 2022.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607048788
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	63
System flux (lm)	2340

Physical

Color	Off-white
Length (in)	65.55
Cord color	Clear
Cord length (in)	102.362
Canopy width (in)	3.937
Canopy height (in)	1.732
Net weight (lb)	24.98
Gross weight (lb)	42.62
Package volume (in)	13281.26
IP internal	20

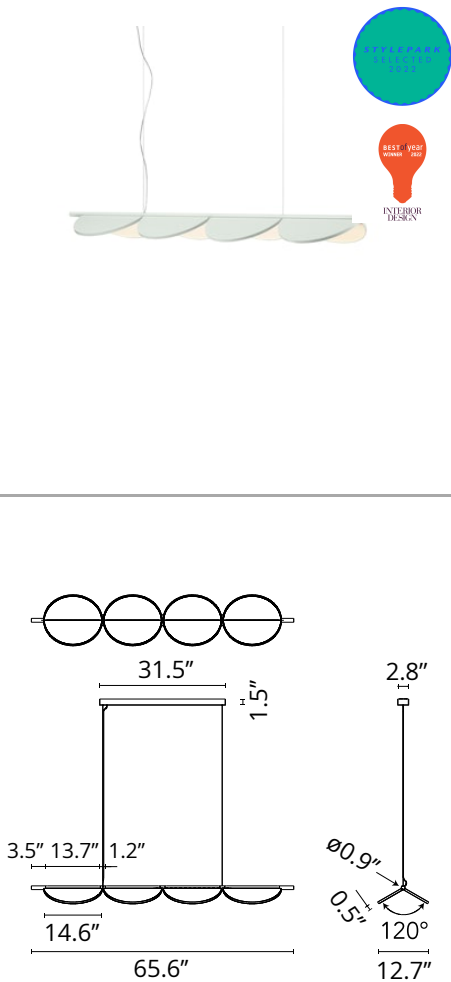

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)

Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	120
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E

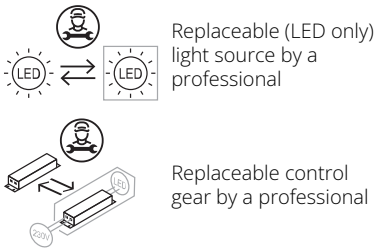

Spare Parts

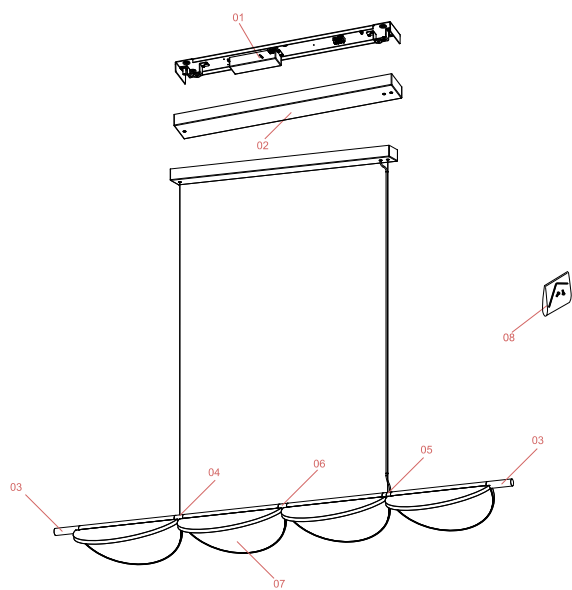

- | | | |
|-----|---------------------------------|-----------|
| 03. | Almendra White terminal joint | RF32773 |
| | L90 | |
| 04. | Almendra wiring and connections | RF32530 |
| | white assembly | |
| 05. | Almendra white suspension | RF32521 |
| | wiring assembly | |
| 06. | Assembly Almendra Suspension | RF32569 |
| | Wiring White | |
| 07. | Almendra Suspension White | RF32514 |
| | body assembly | |
| 08. | Kit with screws and allen key | RF3160100 |



RF32773
Almendra White terminal joint
L90



RF32530
Almendra wiring and connections
white assembly



RF32521
Almendra white suspension
wiring assembly



RF32569
Assembly Almendra Suspension
Wiring White



RF32514
Almendra Suspension White body
assembly



RF3160100
Kit with screws and allen key