

Duo petra


4871

Design By Ramos & Bassols

VIBIA

Duo Petra is a surface installation ceiling light where its interior natural slate appearance is combined with the technical elegance of its aluminum outer shell.

Spec sheet



Finish

- 93 White
RAL 9016
- 58 Cream
RAL 7044
- 18 Graphite
ADAPTA RF 9913

LED

2700 K / 3500 K / Tunable White

Control

0-10V / DALI

Electrical connection

Surface

Light source

1 x LED PLATE 26W 500mA

LED

CRI>90 2206 lm 98

Driver

Constant Current 500 mA 120~277 V
50/60 Hz

LED IP20 Multi-volt  50-60Hz

Application

Ceiling


Packaging

1 Box
21.97 in x 21.97 in x 10.04 in
Gross weight 15.42 lbs
Net weight 13.22 lbs
Vol. 2.8005 ft3



Lighting effect

General

First layer of basic, general illumination



Photometric Data

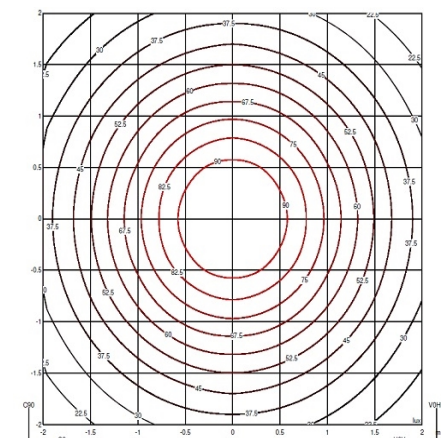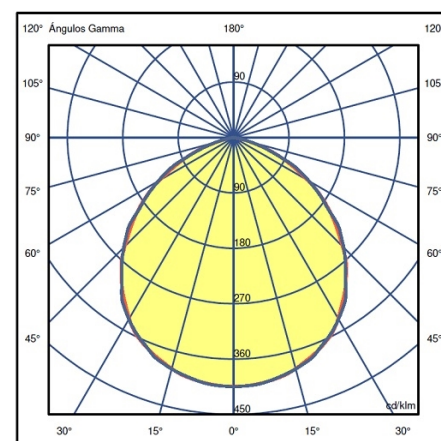

Efficiency

69.505 lm/W

Total Flux

1796.0 lm

Maximum Value

404.43 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

Duo petra




4873

Design By Ramos & Bassols

VIBIA

Duo Petra is a surface installation ceiling light where the natural appearance of slate on the inside is combined with the technical elegance of the aluminum casing on the outside. Its large dimensions and diffused lighting help illuminate large spaces with a single electrical connection.

Spec sheet



Finish

- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913
- 58 Cream
RAL 7044

LED

2700 K / 3500 K / Tunable White

Control

0-10V / DALI

Electrical connection

Surface

Light source

1 x LED PLATE 55W 700 mA

LED

CRI>90 3958.8 lm 98

Driver

Constant Current 700 mA 120~277 V
50/60 Hz

LED IP20 Multi-volt Φ 50-60Hz

Application

Ceiling


Packaging

1 Box
35.28 in x 34.72 in x 9.8 in
Gross weight 41.85 lbs
Net weight 37.44 lbs
Vol. 6.9465 ft³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

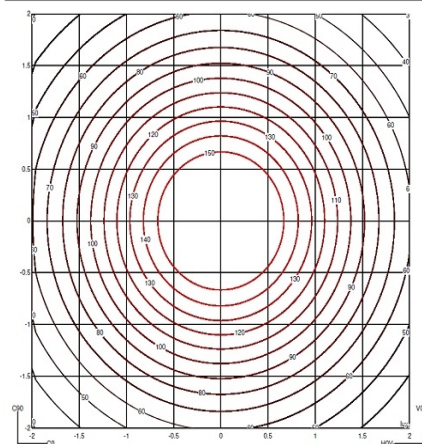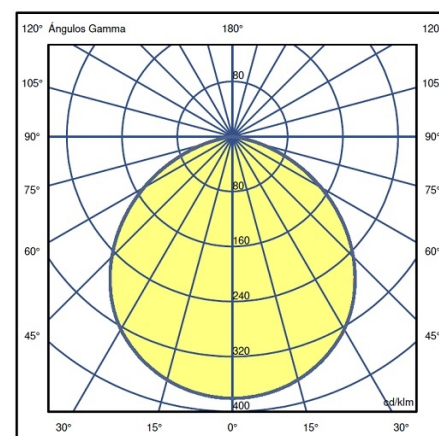

Efficiency

77.317 lm/W

Total Flux

3580.0 lm

Maximum Value

380.69 cd/klm

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Duo petra




4879

Design By Ramos & Bassols

VIBIA

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The Duo Petra ceiling light becomes a focal point without needing to be suspended.

Spec sheet

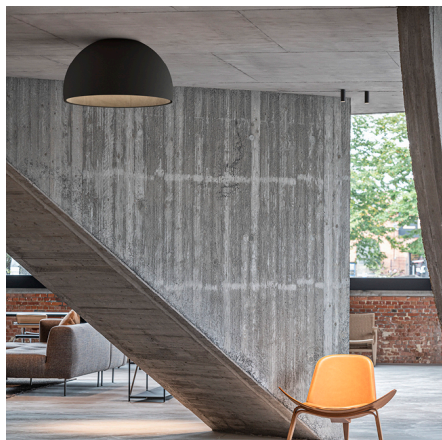

Finish

- 58 Cream
RAL 7044
- 93 White
RAL 9016
- 18 Graphite
ADAPTA RF 9913

LED

2700 K / 3500 K / Tunable White

Control

0-10V / DALI

Electrical connection

Surface

Light source

1 x LED PLATE 26W 500mA

LED

CRI>90 2206 lm 98

Driver

Constant Current 500 mA 120~277 V
50/60 Hz

LED IP20 Multi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
23.35 in x 30.91 in x 30.91 in
Gross weight 35.24 lbs
Net weight 30.84 lbs
Vol. 12.9041 ft3



Lighting effect

General

First layer of basic, general illumination



Photometric Data

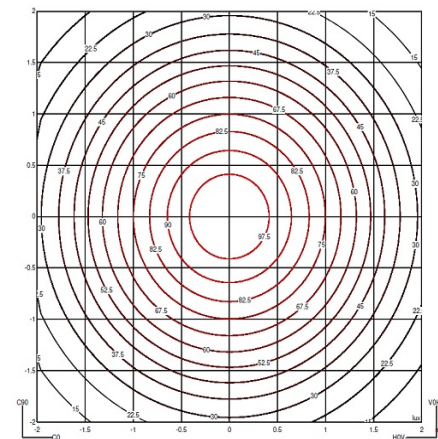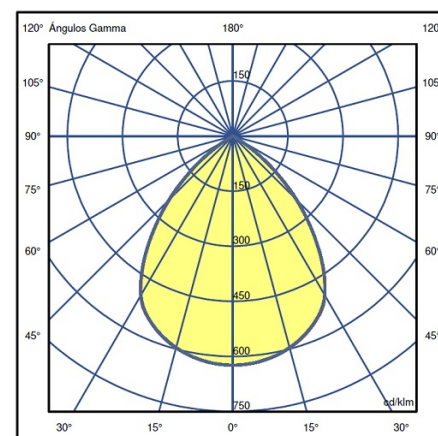

Efficiency

46.739 lm/W

Total Flux

1201.8 lm

Maximum Value

623.60 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

Duo petra




4881

Design By Ramos & Bassols

VIBIA

Duo Petra is a surface installed ceiling light where the interior features the natural appearance of slate. The angled ceiling model is perfect for directing its diffuse lighting towards the required location

Spec sheet



Finish

18 Graphite
ADAPTA RF 9913

58 Cream
RAL 7044

93 White
RAL 9016

LED

2700 K / 3500 K / Tunable White

Control

0-10V / DALI

Electrical connection

Surface

Light source

1 x LED PLATE 26W 500mA

LED

CRI>90 2068 lm 109

Driver

Constant Current 500 mA 120~277 V
50/60 Hz

LED IP20 Multi-volt 50-60Hz

Application

Ceiling


Packaging

1 Box
23.35 in x 30.91 in x 30.91 in
Gross weight 35.24 lbs
Net weight 30.84 lbs
Vol. 12.9041 ft³



Lighting effect

General

First layer of basic, general illumination



Photometric Data

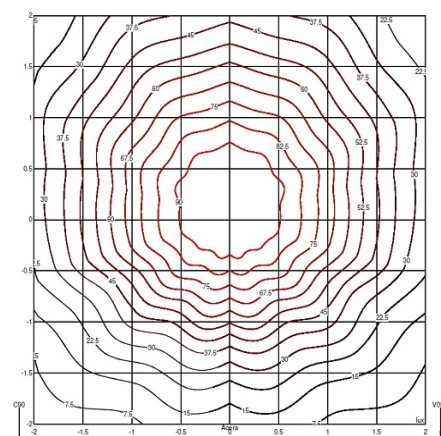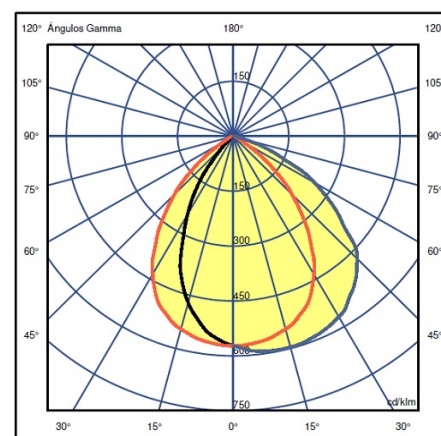

Efficiency

50.193 lm/W

Total Flux

1313.6 lm

Maximum Value

596.17 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)