

Coordinates Suspension 3


Designed by Michael Anastassiades, 2020



71W - 3850lm - 2700K - CRI> 95

Suspension lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection with 2.4 m cables. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Designed by Michael Anastassiades, Coordinates Suspension translates the collection's illuminated grid into a series of suspended compositions. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.

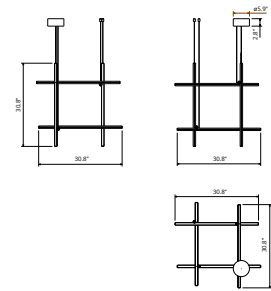

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607038420
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	71
System flux (lm)	3850

Physical

Color	Argent
Length (in)	30.71
Cord color	Black
Cord length (in)	94.488
Canopy height (in)	2.795
Net weight (lb)	7.05
Gross weight (lb)	14.99
Package volume (in)	2160.86
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)



GWT
850°

IP
20

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

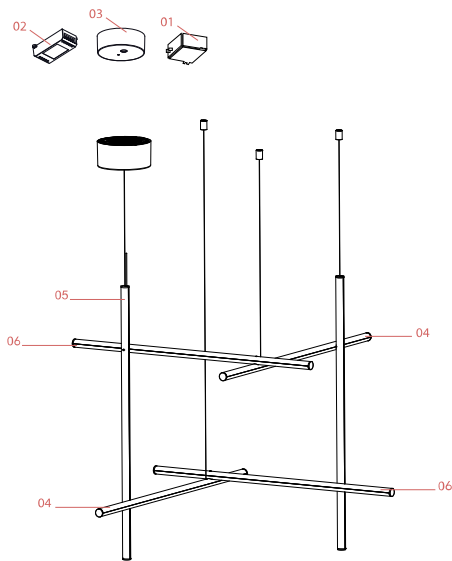

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Assembly Rose for Coordinates Suspension Argent | RF1872133 |
| 04. | Coordinates Suspension S3 Rod Assembly L780 SH-03 Argent | RF30911 |
| 05. | Coordinates Suspension S3 Rod Assembly L780 SA-49 UL | RF30957 |
| 06. | Coordinates Suspension S3 Rod Assembly L780 H-02 Argent | RF30910 |
| 07. | Coordinates Suspension S3 Rod Assembly L780 S-04 Argent | RF30912 |




RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF35452

Led dimmer kit



RF1872133

Assembly Rose for Coordinates
Suspension Argent



RF30911

Coordinates Suspension S3 Rod
Assembly L780 SH-03 Argent



RF30957

Coordinates Suspension S3 Rod
Assembly L780 SA-49 UL



RF30910

Coordinates Suspension S3 Rod
Assembly L780 H-02 Argent



RF30912

Coordinates Suspension S3 Rod
Assembly L780 S-04 Argent


Coordinates Suspension 4

Designed by Michael Anastassiades, 2020

161W - 8830lm - 2700K - CRI> 95

Suspension lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection with 2.4 m cables. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Designed by Michael Anastassiades, Coordinates Suspension translates the collection's illuminated grid into a series of suspended compositions. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607038390
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	161
System flux (lm)	8830

Physical

Color	Argent
Length (in)	69.68
Cord color	Black
Cord length (in)	94.488
Canopy height (in)	3.740
Net weight (lb)	17.42
Gross weight (lb)	31.19
Package volume (in)	3827.42
IP internal	20

Download

Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)



GWT
850°

IP
20

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

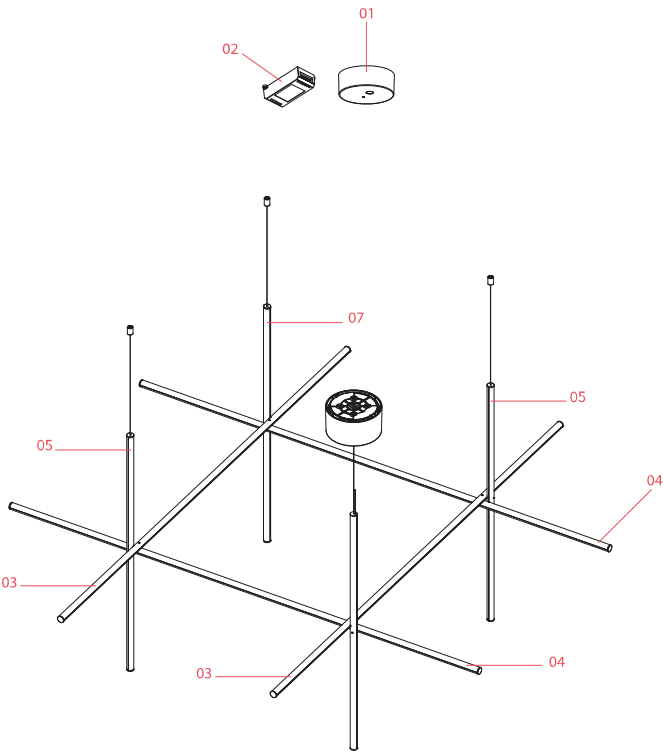

- | | | |
|-----|---|-----------|
| 01. | Coordinates S Assembly Big Rose Argent | RF1873133 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Coordinates Suspension 4 Rod Assembly L1760 H-11 Argent | RF30919 |
| 04. | Coordinates Suspension 4 Rod Assembly L1760 H-10 Argent | RF30918 |
| 05. | Coordinates Suspension 4 Rod Assembly L920 S-14 Argent | RF30922 |
| 07. | Coordinates Suspension 4 Rod Assembly L920 S-13 Argent | RF30921 |



RF1873133
Coordinates S Assembly Big Rose
Argent



RF35452
Led dimmer kit



RF30919
Coordinates Suspension 4 Rod
Assembly L1760 H-11 Argent



RF30918
Coordinates Suspension 4 Rod
Assembly L1760 H-10 Argent



RF30922
Coordinates Suspension 4 Rod
Assembly L920 S-14 Argent



RF30921
Coordinates Suspension 4 Rod
Assembly L920 S-13 Argent

Coordinates Suspension 1


Designed by Michael Anastassiades, 2020



37W - 1920lm - 2700K - CRI> 95

Suspension lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection with 2.4 m cables. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Designed by Michael Anastassiades, Coordinates Suspension translates the collection's illuminated grid into a series of suspended compositions. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607038406
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	37
System flux (lm)	1920

Physical

Color	Argent
Length (in)	30.71
Cord color	Black
Cord length (in)	94.488
Canopy height (in)	2.795
Net weight (lb)	5.18
Gross weight (lb)	9.59
Package volume (in)	1365.11
IP internal	20

Download

Mounting instructions

PDF

Photometric Files

ULD

ZIP

Technical Drawings

3D

ZIP



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

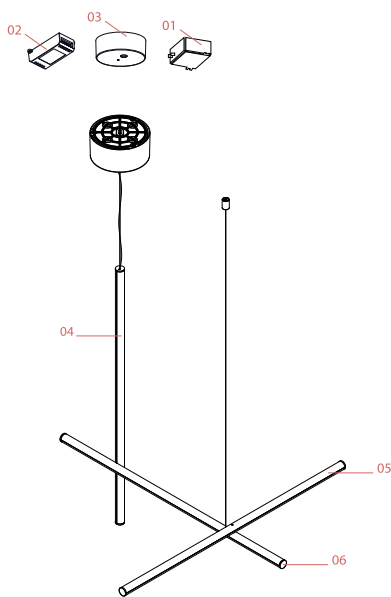

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Assembly Rose for Coordinates Suspension Argent | RF1872133 |
| 05. | Coordinates Suspension rod assembly L780 H-06 Argent | RF30914 |
| 06. | Coordinates Suspension S3 Rod Assembly L780 SH-03 Argent | RF30911 |




RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF35452

Led dimmer kit



RF1872133

Assembly Rose for Coordinates
Suspension Argent



RF30914

Coordinates Suspension rod
assembly L780 H-06 Argent



RF30911

Coordinates Suspension S3 Rod
Assembly L780 SH-03 Argent

Coordinates Suspension 2

Designed by Michael Anastassiades, 2020

55W - 2960lm - 2700K - CRI> 95

Suspension lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection with 2.4 m cables. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Designed by Michael Anastassiades, Coordinates Suspension translates the collection's illuminated grid into a series of suspended compositions. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607038413
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	55
System flux (lm)	2960

Physical

Color	Argent
Length (in)	69.29
Cord color	Black
Cord length (in)	94.488
Canopy height (in)	2.795
Net weight (lb)	5.95
Gross weight (lb)	11.9
Package volume (in)	1748.21
IP internal	20



Download

Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ZIP](#)

Technical Drawings

3D [Download ZIP](#)



GWT
850°

IP
20

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy
Labelling

This product contains a light
source of energy efficiency
class F



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

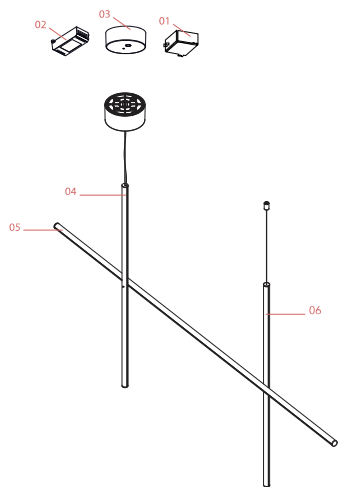

- | | | |
|-----|--|-----------|
| 01. | Power supply kit for Arrangements small & Noctambule | RF0410500 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Assembly Rose for Coordinates Suspension Argent | RF1872133 |
| 05. | Coordinates Suspension 2 Rod Assembly 1760 H-21 Argent | RF30929 |
| 06. | Coordinates Suspension 2 Rod Assembly L920 S-20 Argent | RF30928 |




RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF35452

Led dimmer kit



RF1872133

Assembly Rose for Coordinates
Suspension Argent



RF30929

Coordinates Suspension 2 Rod
Assembly 1760 H-21 Argent



RF30928

Coordinates Suspension 2 Rod
Assembly L920 S-20 Argent

Coordinates Module Suspension

Designed by Michael Anastassiades, 2020

180W - 10230lm - 2700K - CRI> 90

Suspension lighting system emitting diffused light. Composed of horizontal and vertical luminaires arranged in a grid. Elements made of extruded anodised aluminium with a platinum optical silicone diffuser housing an integrated LED strip. Invisible electrical and mechanical connection with 2.4 m cables. Each configuration includes a ceiling rose with integrated electronics for push, 1–10 V or DALI dimming.

Designed by Michael Anastassiades, Coordinates Suspension translates the collection's illuminated grid into a series of suspended compositions. Evolving from a commission for the historic Four Seasons restaurant in New York, Coordinates takes inspiration from the Cartesian grid, translating pure mathematical precision into light. Its modular, scalable system allows configurations ranging from minimal arrangements to complex installations. Elegant, imposing and expressive, it brings geometry to life within any space.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607038307
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	180
System flux (lm)	10230

Physical

Color	Argent
Length (in)	69.68
Cord color	Black
Cord length (in)	94.488
Canopy height (in)	3.740
Net weight (lb)	19.18
Gross weight (lb)	34.28
Package volume (in)	3827.42
IP internal	20

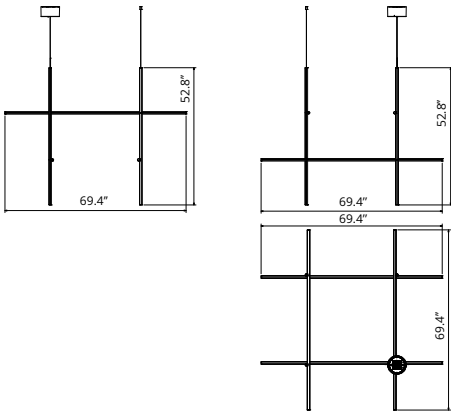

Download

Mounting instructions



PDF

Photometric Files

ULD



ZIP

Technical Drawings

3D



ZIP



GWT
850°

IP
20

Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Spare Parts

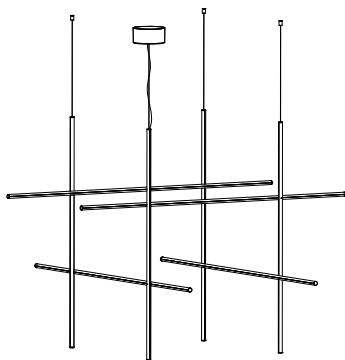

- 01. Led dimmer kit RF35452
- 02. Coordinates S Assembly Big Rose RF1873133 Argent



RF35452

Led dimmer kit



RF1873133

Coordinates S Assembly Big Rose
Argent