FLOS

05.4530.14.BS Black

The Glowing Track Vertical Dimmable Casambi

Designed by FLOS Architectural, 2025

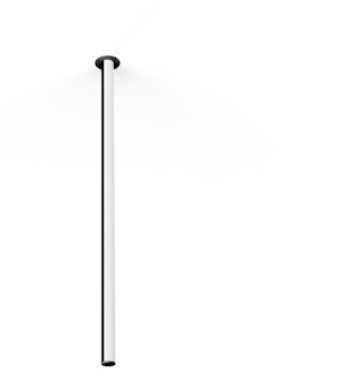

Ceiling

Surface lighting system with a vertical orientation that combines ambient lighting with a track that allows the installation of a wide range of projectors and accent lighting modules. Available in three lengths (600mm, 1200 mm, 1800 mm, and 2400 mm). Driver not included.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	24.8
System power (W)	27.6
Source flux (lm)	2824
System flux (lm)	1746

Physical

Color	Black
Orientation	Fixed
Cord color	Transparent
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files

LDT / IES	ZIP

Technical Drawings

2D	ZIP
3D	ZIP

CE | RG IEC 62471 | UL | UKCA | GWT 850° | IP 20

Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

©2026 Flos - P.IVA 00290820174 - 8/7/2026

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Luminous flux luminaire
1746 lm

Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	87
Rg gamut index	104
LED Life / Failure Ratio	L80B10>72.000h_Tc65ºC
Extreme cut off	No
UGRL	<16

Electrical

Insulation class	III
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable Casambi
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

©2026 Flos - P.IVA 00290820174 - 8/7/2026

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Accessories & Power Supply

REQUIRED
Power supply

LEDSB96W24V-NDM-D1

LED Driver, 96W 24V Non-Dimmable



OPTIONAL
Connector

08.1206.14

Corner Joint 2 Suspension/Surface

©2026 Flos - P.IVA 00290820174 - 8/7/2026

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

FLOS

08.1206.14 Black

Corner Joint 2 Suspension/Surface

Designed by FLOS Architectural, 2025

90° corner connector used to join components in the horizontal and vertical plane.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Main specifications

Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
Number of lamps	1

Physical

Color	Black
Orientation	Fixed
IP internal	20

CE | RG IEC 62471 | UL | UKCA | GWT 850° | IP 20

Photometric

Extreme cut off	No

Electrical

Insulation class	III
Dimming range (%)	1-100
Batteries inside	No

©2026 Flos - P.IVA 00290820174 - 8/6/2026

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.