

Plusminus solo



6330

Design By Diez Office

VIBIA

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides direct accent light.

Spec sheet



Finish

- 42 Blue M1
NCS S 5010-B10G
- 24 Beige M1
NCS S 2005-Y50R
- 11 Black
NCS S 8500-N
- 53 Green M1
NCS S 6005-G80Y
- 37 Terra Red
NCS S 4040-Y70R

LED

2700 K / 3000 K / 3500 K

Control

DALI / On/Off / TRIAC / 0-10V

Electrical connection

Remote

Light source

1 x LED 7,9W 450mA

LED

CRI>90 846 lm 107.09

Driver

450 mA 120~277 V 50/60 Hz

☐ LED ☐ IP20 ☐ Multi-volt ☒ 50-60Hz

Application

Ceiling


Packaging

1 Box
5.83 in x 6.34 in x 7.6 in
Gross weight 1.48 lbs
Net weight 1.08 lbs
Vol. 0.1589 ft3



Lighting effect

Narrow Accent Spotlight

Angles less than 20°. Suitable for generating high contrasts or projections from far away.



Photometric Data

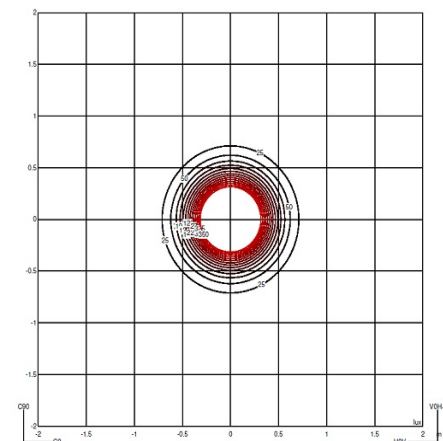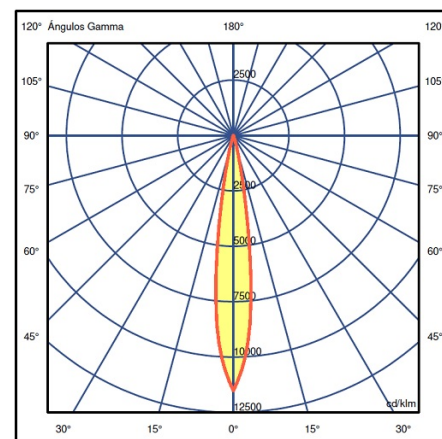

Efficiency

46.187 lm/W

Total Flux

365 lm

Maximum Value

11513.12 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavá

(Barcelona - Spain)

Plusminus solo



6331

Design By Diez Office

VIBIA

The recessed version of Plusminus Solo is easily adjustable by rotating around on itself. Provides direct accent light

Spec sheet



Finish

- 11 Black
NCS S 8500-N
- 42 Blue M1
NCS S 5010-B10G
- 53 Green M1
NCS S 6005-G80Y
- 37 Terra Red
NCS S 4040-Y70R
- 24 Beige M1
NCS S 2005-Y50R

LED

2700 K / 3000 K / 3500 K

Control

TRIAC / 0-10V / On/Off / DALI

Electrical connection Remote

Light source

1 x LED 7,9W 450mA

LED

CRI>90

Driver

Constant Current 450 mA 120~277 V
50/60 Hz

☐ Dimmable ☒ LED ☒ IP20 ☒ Multi-volt 

Application


Ceiling

Packaging



Lighting effect

Medium Accent Spotlight

Angles between 20° and 40°. Suitable for generating medium contrasts or projections from medium



Photometric Data

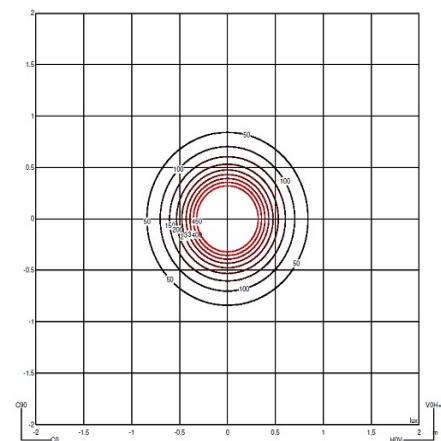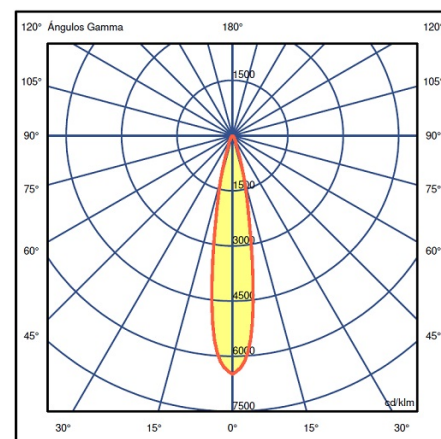

Efficiency

83.285 lm/W

Total Flux

658 lm

Maximum Value

6482.33 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavá
(Barcelona - Spain)

Plusminus solo



6332

Design By Diez Office

VIBIA

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides direct accent light.

Spec sheet



Finish

37 Terra Red
NCS S 4040-Y70R

53 Green M1
NCS S 6005-G80Y

24 Beige M1
NCS S 2005-Y50R

11 Black
NCS S 8500-N

42 Blue M1
NCS S 5010-B10G

LED

2700 K / 3000 K / 3500 K

Control

0-10V / On/Off / TRIAC / DALI

Electrical connection

Remote

Light source

1 x LED 7,9W 450mA

LED

CRI>90

Driver

Constant Current 450 mA 120~277 V
50/60 Hz

☐ LED ☐ IP20 ☐ Multi-volt ☒ 50-60Hz

Application


Ceiling

Packaging



Lighting effect

Wide Accent Spotlight

Angles greater than 40°. Suitable for generating moderate contrasts or projections from nearer



Photometric Data

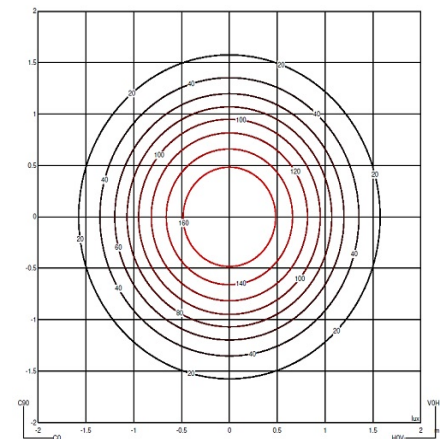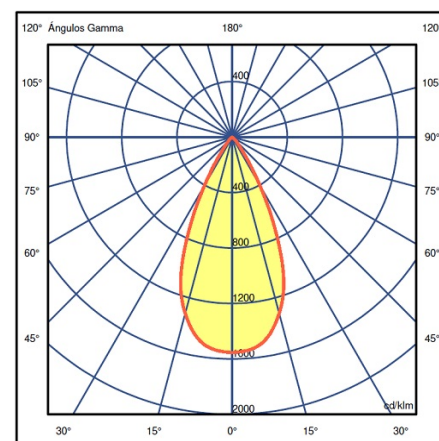

Efficiency

92.639 lm/W

Total Flux

732 lm

Maximum Value

1552.05 cd/klm

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Plusminus solo


6333

Design By Diez Office

VIBIA

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides a diffused light.

Spec sheet



Finish

- 11 Black
NCS S 8500-N
- 42 Blue M1
NCS S 5010-B10G
- 53 Green M1
NCS S 6005-G80Y
- 24 Beige M1
NCS S 2005-Y50R
- 37 Terra Red
NCS S 4040-Y70R

LED

2700 K / 3000 K / 3500 K

Control

TRIAC / 0-10V / DALI / On/Off

Electrical connection Remote

Light source

1 x LED 4,2W 250mA

LED

CRI>90 491 lm

Driver

250 mA 120-277 V 50/60 Hz

☐ LED ☐ IP20 ☐ Multi-volt ☒ 50-60Hz

Application


Ceiling

Packaging



Lighting effect

General Flat Diffuser

First layer of basic, general illumination



Photometric Data

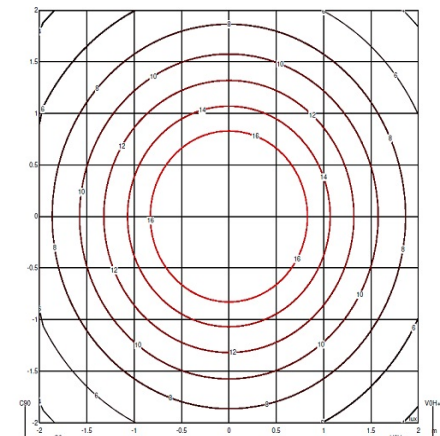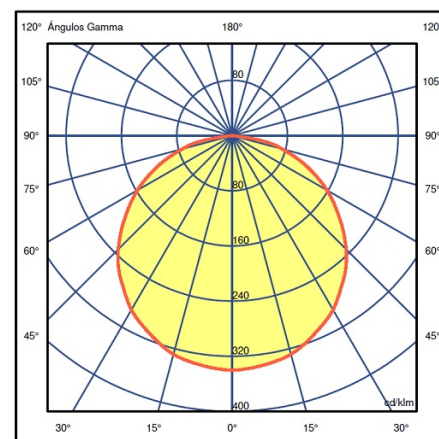

Efficiency

86.667 lm/W

Total Flux

364 lm

Maximum Value

340.24 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

Plusminus solo



6335

Design By Diez Office

VIBIA

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides a diffuse light.

Spec sheet

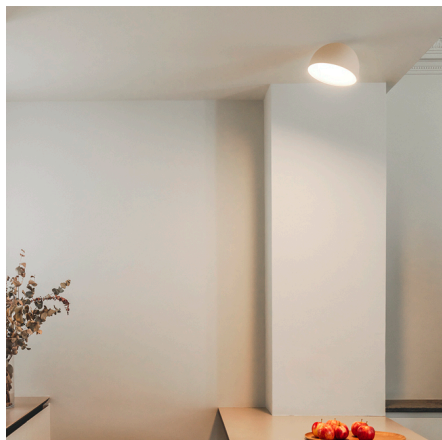

Finish

- 11 Black
NCS S 8500-N
- 37 Terra Red
NCS S 4040-Y70R
- 53 Green M1
NCS S 6005-G80Y
- 24 Beige M1
NCS S 2005-Y50R
- 42 Blue M1
NCS S 5010-B10G

LED

2700 K / 3000 K / 3500 K

Control

TRIAC / On/Off / 0-10V / DALI

Electrical connection

Remote

Light source

1 x LED 7,9W 450mA

LED

CRI>90

Driver

Constant Current 450 mA 120~277 V
50/60 Hz

☐ LED ☐ IP20 ☐ Multi-volt ☒ 50-60Hz

Application


Ceiling

Packaging



Lighting effect

General Flat Diffuser

First layer of basic, general illumination



Photometric Data

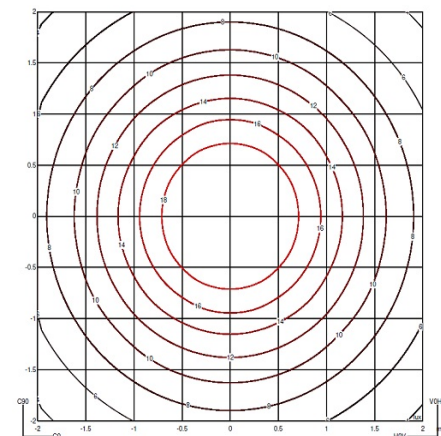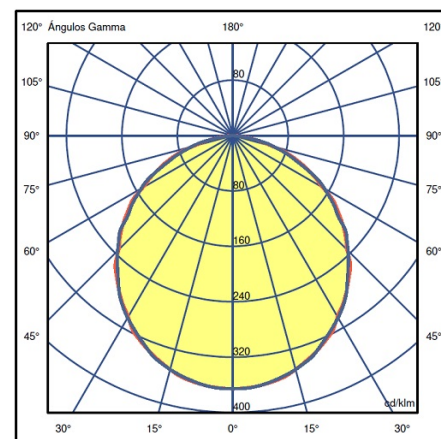

Efficiency 46.041 lm/W

Total Flux 364 lm

Maximum Value 365.65 cd/klm

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Plusminus solo


6340

Design By Diez Office

VIBIA

The recessed version of Plusminus Solo is easily adjustable by rotating it around on itself. Provides a diffuse light.

Spec sheet

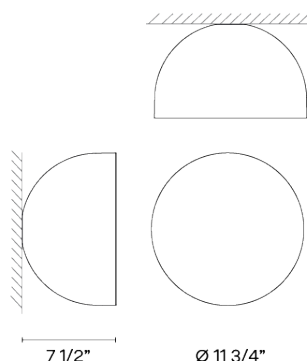

Finish

24 Beige M1
NCS S 2005-Y50R

37 Terra Red
NCS S 4040-Y70R

11 Black
NCS S 8500-N

42 Blue M1
NCS S 5010-B10G

53 Green M1
NCS S 6005-G80Y

LED

2700 K / 3000 K / 3500 K

Control

DALI / TRIAC / On/Off / 0-10V

Electrical connection

Remote

Light source

1 x LED 16W 850mA

LED

CRI>90

Driver

Constant Current 850 mA 120~277 V
50/60 Hz

☐ LED ☐ Multi-volt ☒ 50-60Hz ☐ 1-10V

Application


Ceiling

Packaging



Lighting effect

General Flat Diffuser

First layer of basic, general illumination



Photometric Data

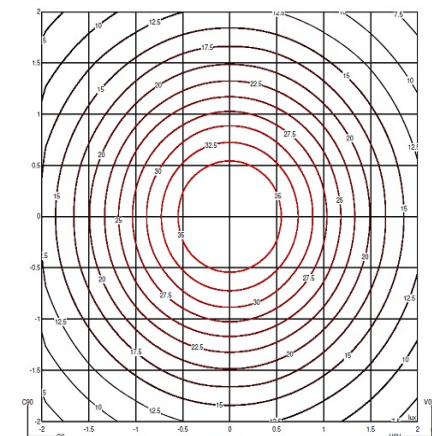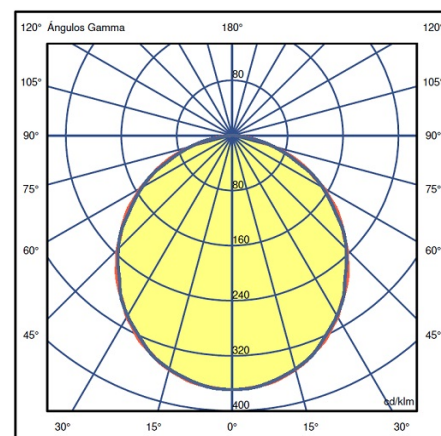

Efficiency

41.115 lm/W

Total Flux

658 lm

Maximum Value

368.98 cd/klm

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com