

FLOS

06.2600.14 Black

Profile 1000mm Dimmable

Designed by FLOS Architectural, 2023

Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

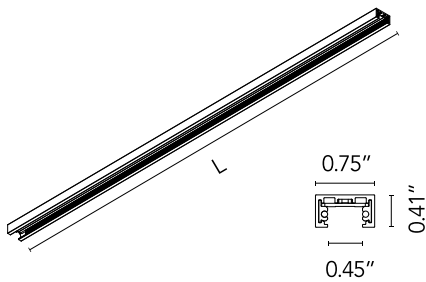

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Connector

Electrical

06.2606.14

Live End Feed Dimmable



REQUIRED
Connector

Electrical

06.2607.14

Linear Connector Feed Dimmable



REQUIRED
Corner

06.2610.14


Inner Corner



REQUIRED
Corner

06.2609.14


90° Corner Feed Dimmable



REQUIRED
Power supply

06.2623.14


Power Supply Surface Middle
Dimmable / Non Dimmable



REQUIRED
Power supply

06.2622.14

Power Supply Surface End
Dimmable / Non Dimmable




REQUIRED
Component

Installation

06.2617.14

Blind End



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.



OPTIONAL Connector

Electrical

06.2608.14

Straight Connector

FLOS

06.2601.14 Black

Profile 2000mm Dimmable

Designed by FLOS Architectural, 2023

Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

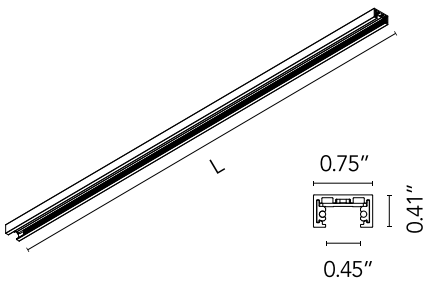

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply




REQUIRED
Connector

Electrical

06.2606.14

Live End Feed Dimmable



REQUIRED
Power supply

06.2623.14

Power Supply Surface Middle
Dimmable / Non Dimmable




REQUIRED
Connector

Electrical

06.2607.14

Linear Connector Feed Dimmable



REQUIRED
Power supply

06.2622.14

Power Supply Surface End
Dimmable / Non Dimmable



REQUIRED
Corner

06.2610.14


Inner Corner



REQUIRED
Corner

06.2609.14

90° Corner Feed Dimmable




REQUIRED
Component

Installation

06.2617.14

Blind End



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.



OPTIONAL Connector

Electrical

06.2608.14

Straight Connector

FLOS

06.2602.14 Black

Profile 3000mm Dimmable

Designed by FLOS Architectural, 2023

Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

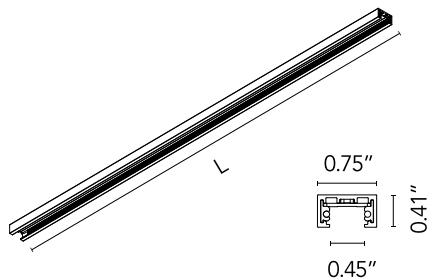

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Corner

06.2609.14

90° Corner Feed Dimmable



REQUIRED
Connector

Electrical

06.2606.14

Live End Feed Dimmable




REQUIRED
Connector

Electrical

06.2607.14

Linear Connector Feed Dimmable



REQUIRED
Power supply

06.2622.14


Power Supply Surface End
Dimmable / Non Dimmable



REQUIRED
Corner

06.2610.14


Inner Corner



REQUIRED
Power supply

06.2623.14

Power Supply Surface Middle
Dimmable / Non Dimmable




REQUIRED
Component

Installation

06.2617.14

Blind End



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.



OPTIONAL Connector

Electrical

06.2608.14

Straight Connector

Profile 1000mm No Dimmable

Designed by FLOS Architectural, 2023

Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Brushed Steel
IP internal	20

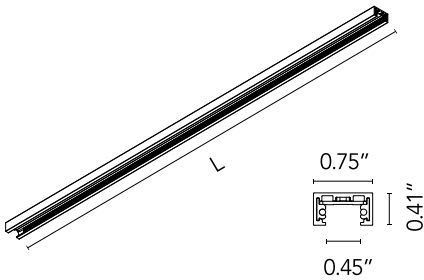

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Connector

06.2613.ER

Live End Feed Non Dimmable



REQUIRED
Power supply

06.2622.ER

Power Supply Surface End
Dimmable / Non Dimmable



REQUIRED
Connector

06.2621.ER

Linear Connector Feed - Non
Dimmable



REQUIRED
Corner

06.2614.ER

90° Corner Feed Non Dimmable



REQUIRED
Component

06.2617.ER


Blind End



REQUIRED
Power supply

06.2623.ER

Power Supply Surface Middle
Dimmable / Non Dimmable




OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.




OPTIONAL
Component

Installation

06.2618.14A

Track Cover 3000mm



OPTIONAL
Component

Installation

06.2618.40A

Track Cover 3000mm



OPTIONAL
Connector

Electrical

06.2608.14

Straight Connector

Profile 2000mm No Dimmable

Designed by FLOS Architectural, 2023

Wall surface, Ceiling surface

Interior electromechanical profile (24Vdc) from 1 to 3m long for wall or ceiling installation, fastened with special screws and plugs provided with the profile. Request power connectors, intermediate connectors and covers separately. Feed unit joints available in the form of L, T and X in the same plane. It also has a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall). Aesthetic covers for the inner profile gap available as an option.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Brushed Steel
IP internal	20

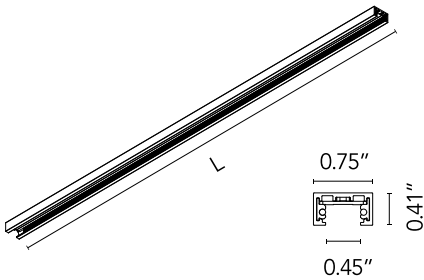

Download

Family spec sheet	 ZIP
Mounting instructions	 PDF



Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Connector

06.2613.ER

Live End Feed Non Dimmable



REQUIRED
Connector

06.2621.ER

Linear Connector Feed - Non Dimmable



REQUIRED
Corner

06.2614.ER

90° Corner Feed Non Dimmable



REQUIRED
Component

06.2617.ER

Blind End



REQUIRED
Power supply

06.2623.ER


Power Supply Surface Middle Dimmable / Non Dimmable



REQUIRED
Power supply

06.2622.ER

Power Supply Surface End Dimmable / Non Dimmable




OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V, 24/48V. For remote installation.




OPTIONAL
Component

Installation

06.2618.40A

Track Cover 3000mm



OPTIONAL
Component

Installation

06.2618.14A

Track Cover 3000mm



OPTIONAL
Connector

Electrical

06.2608.14

Straight Connector

FLOS

06.2606.14 Black

Live End Feed Dimmable

Designed by FLOS Architectural, 2023




Wall surface, Ceiling surface

Feed unit for remote power supply unit. Power cable inserting is possible both from the Rear and the side.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

Download


Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.

Linear Connector Feed Dimmable

Designed by FLOS Architectural, 2023



Wall surface, Ceiling surface

Feed intermediate connector. Rear feeding cable entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

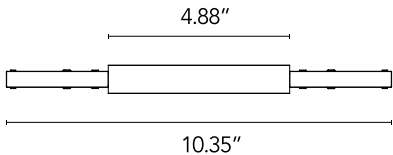

Download


Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.

FLOS

06.2609.14 Black

90° Corner Feed Dimmable

Designed by FLOS Architectural, 2023




Wall surface, Ceiling surface

90° flat corner. Can be powered. It has a rear space for the supply connection. Rear feeding cable entry.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20

Download


Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.

Inner Corner

Designed by FLOS Architectural, 2023



Wall surface, Ceiling surface

Ceiling/wall - wall/wall inner corner.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20



Download


Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



OPTIONAL
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.

T Connector Feed Dimmable

Designed by FLOS Architectural, 2023



Wall surface, Ceiling surface

T-shaped connector. Can be powered via connections on the back. Rear feeding cable entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Power supply


Electrical

LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-NDM-D01
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V



OPTIONAL
Power supply

Electrical


08.0613.14A
Dimmable control box 1-10V, 24/48V. For remote installation.



OPTIONAL
Component

Installation

06.2618.40A
Track Cover 3000mm



OPTIONAL
Component

Installation

06.2618.14A
Track Cover 3000mm



OPTIONAL
Connector

Electrical

06.2608.14
Straight Connector

X Connector Feed Dimmable

Designed by FLOS Architectural, 2023



Wall surface, Ceiling surface

Cross-shaped connector. Can be powered via connections on the back. Rear feeding cable entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Wall surface, Ceiling surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Power supply


Electrical

LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-NDM-D01
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V



OPTIONAL
Power supply

Electrical


08.0613.14A
Dimmable control box 1-10V, 24/48V. For remote installation.



OPTIONAL
Component

Installation

06.2618.40A
Track Cover 3000mm



OPTIONAL
Component

Installation

06.2618.14A
Track Cover 3000mm



OPTIONAL
Connector

Electrical

06.2608.14
Straight Connector

FLOS

06.2617.14 Black

Blind End NEW

Designed by FLOS Architectural, 2023



Ceiling surface, Wall surface

End Cap

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20




Download

Family spec sheet	ZIP
Mounting instructions	PDF



Ecodesign and Energy Labelling



Replaceable control gear by a professional

Electrical


Dimming type	Non Dimmable
--------------	--------------

FLOS

06.2618.14A Black

Track Cover 3000mm NEW

Designed by FLOS Architectural, 2023

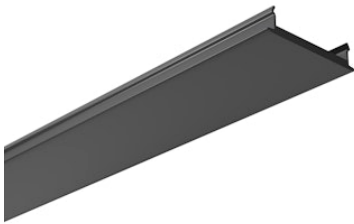


Ceiling surface, Wall surface

Attractive cover for the inside of the profile. Only available in black and white.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
IP internal	20



Photometric

Extreme cut off	No
-----------------	----


Electrical

Dimming type	Non Dimmable
--------------	--------------

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Ecodesign and Energy Labelling



Replaceable control gear by a professional