


l.cono

0700

Design By Lievore Altherr Molina

This table lamp is ideal for reading. Designed by Lievore, Altherr, Molina. Defined by a smooth, flat base and delicate stem, which bends at an angle before meeting the gentle curve of its conical diffuser. Switch on the cable.

Spec sheet



Finish

37 Terra Red
NCS S 4040-Y70R

42 Blue M1
NCS S 5010-B10G

21 Black Grey
NCS S 7000-N

25 Beige D1
NCS S 4005-Y50R

10 White
NCS S 0300-N

LED

2700 K

Control

PUSH / CASAMBI

Electrical connection

Plug-in

Light source

1 x LED 6W 350mA

LED

CRI>90 671 lm 115.69

Driver

Constant Current 350 mA 100-240 V
50/60 Hz

☐ Dimmable IP20  50-60Hz 

Application

Floor and Table

Packaging

1 Box
0.796 in x 0.292 in x 0.312 in
Gross weight 2.5 lbs
Net weight 1.9 lbs
Vol. 0.0725 ft³



Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

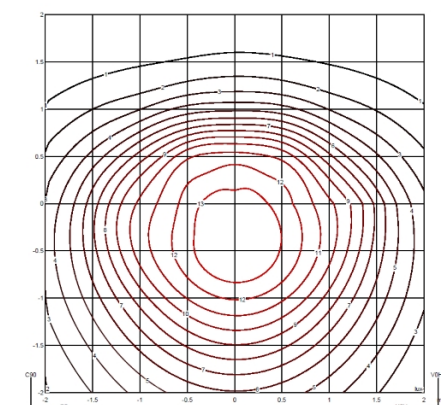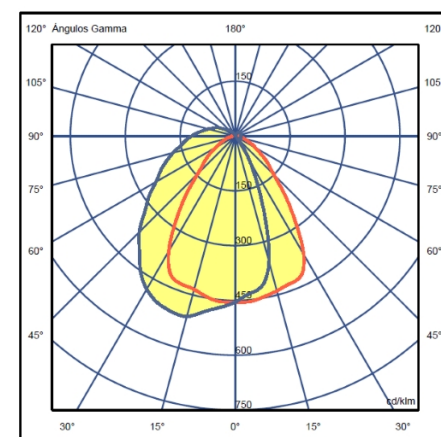

Efficiency

58.04 lm/W

Total Flux

186 lm

Maximum Value

510.94 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa



HEADQUARTERS

Progrés 4-6. 08850 Gavá

(Barcelona - Spain)

This floor lamp is ideal for reading. Designed by Lievore, Altherr, Molina. Defined by a smooth, flat base and delicate stem, which bends at an angle before meeting the gentle curve of its conical diffuser. Switch on the cable.

Spec sheet

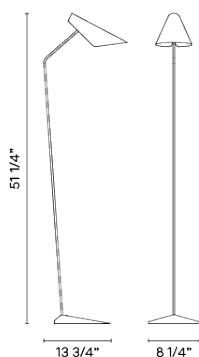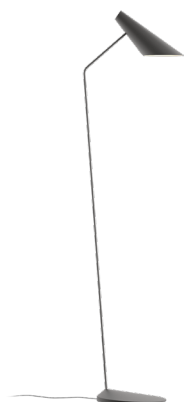

Finish

21 Black Grey
NCS S 7000-N

10 White
NCS S 0300-N

37 Terra Red
NCS S 4040-Y70R

25 Beige D1
NCS S 4005-Y50R

42 Blue M1
NCS S 5010-B10G

LED

2700 K

Control

0-10 and TRIAC / CASAMBI

Electrical connection

Plug-in

Light source

1 x LED 6W 350mA

LED

CRI>90 671 lm 115.69

Driver

Constant Current 350 mA 100-240 V
50/60 Hz

☐ Dimmable IP20  50-60Hz

Remarks

On/off switch on cord

Application

Floor and Table


Packaging

1 Box
1.43 in x 0.3 in x 0.3 in
Gross weight 4 lbs
Net weight 3 lbs
Vol. 0.1287 ft³


Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

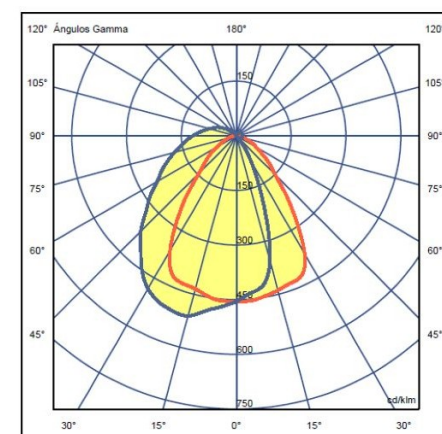

I.cono



0720

Design By Lievore Altherr Molina

VIBIA

As a wall light, I.Cono's stem is cut short, instead emphasising the sculptural qualities of its shade and circular base. Angled to direct light in the desired direction, the fixture's smooth contours and crisp curves provide a slick, urban look that is softened by a range of warm and elegant hues.

Spec sheet



Finish

37 Terra Red
NCS S 4040-Y70R

25 Beige D1
NCS S 4005-Y50R

21 Black Grey
NCS S 7000-N

10 White
NCS S 0300-N

42 Blue M1
NCS S 5010-B10G

LED

2700 K

Control

On/Off

Electrical connection

Surface

Light source

1 x LED 6W 350mA

LED

CRI>90 671 lm 115.69

Driver

Constant Current 350 mA 110~240 V
50/60 Hz

IP20 Multi-volt 50-60Hz

Remarks

On/off switch on the base

Application

Wall


Packaging

1 Box
0.21 in x 0.48 in x 0.21 in
Gross weight 1.1 lbs
Net weight 0.8 lbs
Vol. 0.0211 ft3



Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

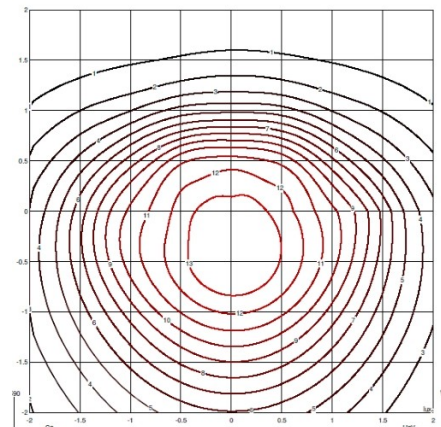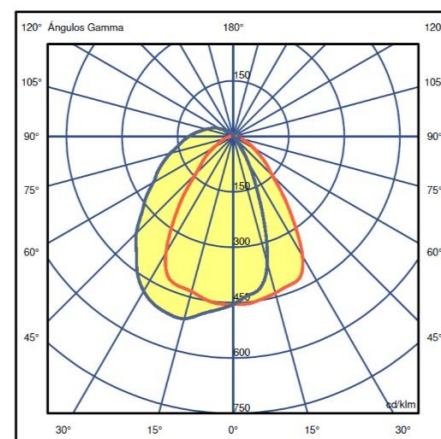

Efficiency 58.04 lm/W

Total Flux 186 lm
Maximum Value 510.94 cd

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavá
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

I.cono




0721

Design By Lievore Altherr Molina

VIBIA

As a wall light, I.Cono's stem is cut short, instead emphasising the sculptural qualities of its shade and circular base. Angled to direct light in the desired direction, the fixture's smooth contours and crisp curves provide a slick, urban look that is softened by a range of warm and elegant hues.

Spec sheet

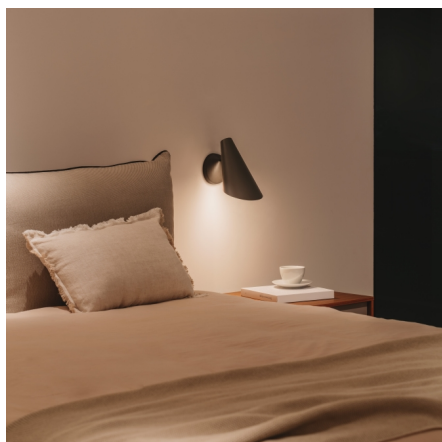

Finish

25 Beige D1
NCS S 4005-Y50R

42 Blue M1
NCS S 5010-B10G

21 Black Grey
NCS S 7000-N

37 Terra Red
NCS S 4040-Y70R

10 White
NCS S 0300-N

LED

2700 K

Control

TRIAC / On/Off / 0-10V

Electrical connection

Remote basic / Surface

LED

CRI>90 671 lm 115.69

Driver

Constant Current 350 mA 110~240 V
50/60 Hz

IP20 Multi-volt  50-60Hz 

Application

Wall


Packaging

1 Box
0.21 in x 0.48 in x 0.21 in
Gross weight 1.1 lbs
Net weight 0.8 lbs
Vol. 0.0211 ft3



Lighting effect

Close Proximity

Lighting applications for illumination in close proximity to the user



Photometric Data

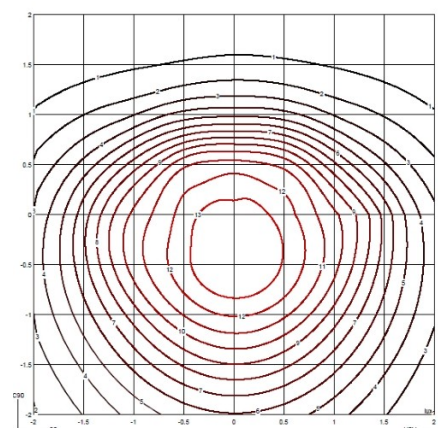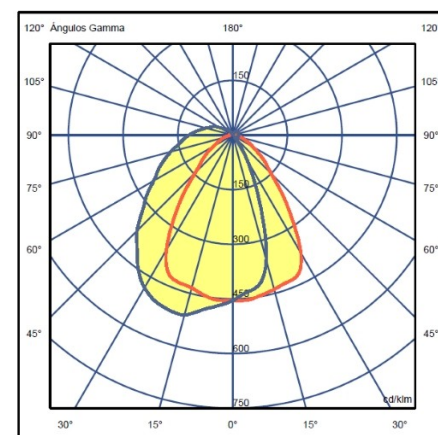

Efficiency

58.04 lm/W

Total Flux

186 lm

Maximum Value

510.94 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavá
(Barcelona - Spain)