

The Running Magnet Suspension Down Feed Unit Profile

Designed by FLOS Architectural



Length: 39.37 - Suspension

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Power (W)	100

Physical

Color	Black
Length (in)	39.37
Net weight (lb)	6.18
Gross weight (lb)	7.28
Package volume (in)	1831
IP internal	20



Download

- Family spec sheet
- Mounting instructions
- ZIP
- PDF



Electrical

Insulation class	II
Forward voltage (V)	24
Driver	Remote

Accessories & Power Supply



REQUIRED
ACCESSORYTYPE2

08.8887.14A
Endcap. 2 unit kit



REQUIRED
Power supply
LEDSB96W24V-NDM-D01
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V




REQUIRED
Power supply
ACCESSORYTYPE1
LEDSB30W24V-NDM-D01
LED Driver, 24VDC, 30W, Non-Dimming, 120-277V




REQUIRED
Power supply
ACCESSORYTYPE1
LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V




OPTIONAL
Corner
06.1610.14
90° Corner. Can be powered



OPTIONAL
Power supply
ACCESSORYTYPE1
08U0002.14
Surface mount canopy Non Dimmable



OPTIONAL
Accessory
08.8883.14A
Canopy surface Black, Power Supply not included order separately



OPTIONAL
Power supply
ACCESSORYTYPE1
08U0002.14A1V
Surface mount canopy 1/10V Dimmable



OPTIONAL
Accessory

ACCESSORYTYPE2

60.3097.14


1 m suspension rod extension set
with m6 thread



OPTIONAL
Corner

06.1657.14

90° Corner



OPTIONAL
Power supply

ACCESSORYTYPE1

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.

The Running Magnet Suspension Down Intermediate Profile

Designed by FLOS Architectural



Length: 39.37 - Suspension

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Power (W)	100

Physical

Color	Black
Length (in)	39.37
Net weight (lb)	5.08
Gross weight (lb)	6.18
Package volume (in)	1831
IP internal	20



Download

- Family spec sheet
- Mounting instructions
- ZIP

PDF



Electrical

Insulation class	II
Forward voltage (V)	24
Driver	Remote

Accessories & Power Supply



OPTIONAL
Corner

06.1610.14

90° Corner. Can be powered



OPTIONAL
ACCESSORYTYPE2

08.8887.14A

Endcap. 2 unit kit



OPTIONAL
Accessory
ACCESSORYTYPE2

60.3097.14

1 m suspension rod extension set
with m6 thread



OPTIONAL
Corner

06.1657.14

90° Corner

FLOS

06.1657.14 Black

90° Corner

Designed by FLOS Architectural, 2015



Length: 6.02 - Suspension

90° Corner. Cannot be powered. Includes 1 cable suspension kit.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

- Family spec sheet [ZIP](#)
- Mounting instructions [ZIP](#)

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light sources included	no

Physical

Color	Black
Trim	No
Length (in)	6.02
Net weight (lb)	1.67
IP internal	20
IP external	20



Electrical

Forward voltage (V) 24

FLOS

06.1740.14 Black

Corner 90° Grid

Designed by FLOS Architectural

Suspension

Corner to build grig structures perfectly closed. Feed unit. Dimensions 153x153.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light sources included	no

Physical

Color	Black
Trim	No
Gross weight (lb)	1.09
IP internal	20
IP external	20



Download

- Family spec sheet [ZIP](#)
- Mounting instructions [ZIP](#)




Photometric

Extreme cut off	No
-----------------	----

Electrical

Forward voltage (V)	24
Driver	Remote excluded
Dimming type	Non Dimmable, Dimmable

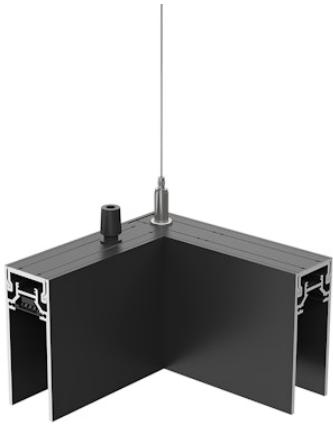


Accessories & Power Supply



OPTIONAL
ACCESSORYTYPE2

08.8887.40A

Endcap. 2 unit kit



OPTIONAL
ACCESSORYTYPE1

08.8886.40

Surface power supply for direct and indirect lighting with housing for the driver


FLOS

06.1741.14 Black

T-Joint Grid Down

Designed by FLOS Architectural

Suspension

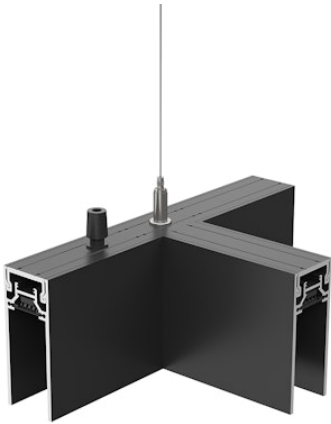

T piece to build grid structures perfectly closed. Feed unit. Dimensions 265x153.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light sources included	no

Physical

Color	Black
Trim	No
Gross weight (lb)	1.09
IP internal	20
IP external	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF




Photometric

Extreme cut off	No
-----------------	----

Electrical

Forward voltage (V)	24
Driver	Remote excluded
Dimming type	Non Dimmable, Dimmable

Accessories & Power Supply



OPTIONAL
ACCESSORYTYPE1

08.8886.40
Surface power supply for direct and indirect lighting with housing for the driver




OPTIONAL
ACCESSORYTYPE2

08.8887.40A
Endcap. 2 unit kit

X-Joint Grid Down

Designed by FLOS Architectural

Suspension

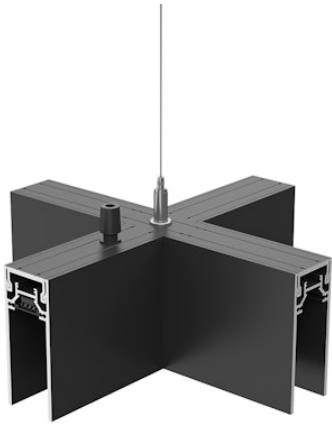

Cross piece to build grid structures perfectly closed. Feed unit. Dimensions 265x265.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light sources included	no

Physical

Color	Black
Trim	No
Gross weight (lb)	1.14
IP internal	20
IP external	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF




Photometric

Extreme cut off	No
-----------------	----

Electrical

Forward voltage (V)	24
Driver	Remote excluded
Dimming type	Non Dimmable, Dimmable

Accessories & Power Supply



OPTIONAL
ACCESSORYTYPE1

08.8886.40
Surface power supply for direct and indirect lighting with housing for the driver



OPTIONAL
ACCESSORYTYPE2

08.8887.40A
Endcap. 2 unit kit