

Light Shadow Pro Ø 90 Wall-Washer - Non IC

Designed by FLOS Architectural



LED - LED array - 14.8W - 1064lm - 2700K - CRI> 90 - Beam° 23

LED lighting module, with wall washer optic, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	14.8
Source flux (lm)	1590
System flux (lm)	1064

Physical

Color	Black
Orientation	Directional
Net weight (lb)	0.89
Gross weight (lb)	1.55
Package volume (in)	427.14
IP internal	20
IP external	54

Download

Mounting instructions  PDF

Photometric Files


LDT / IES  ZIP

Ecodesign and Energy Labelling

 REPLACEABLE2
 PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	23
UGRL	<19


Electrical

Forward voltage (V)	74
LED current (mA)	400
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Class 2 Listed.

Accessories & Power Supply




REQUIRED
Power supply

SP30W400MA-120-U01
Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP30W400MA-277-U01
Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W400MA-ELV-U01
Splice Box 7"x2.22"x1.25", 400mA
, 30W, ELV Dimmable, Thermal
120V




REQUIRED
Frame

08.0161.40
Installation Frame Trim Ø90 Fix




REQUIRED
Frame

08.0161.14
Installation Frame Trim Ø90 Fix




REQUIRED
Frame

08.0193.00
Installation Frame No Trim Ø90
Fix



OPTIONAL
Housing and Hanger Bar

TRAY-0016
Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4""



OPTIONAL
Housing and Hanger Bar

TRAY-0019
Registration Tray - non electrical,
place holder for non IC new
construction, Ø4.75"



03.9920.14.UQ Black

Light Shadow Pro Ø 90 Fixed Optic Spot - Non IC

Designed by FLOS Architectural



LED - LED array - 21.5W - 2030lm - 4000K - CRI> 90 - Beam° 14

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	21.5
System flux (lm)	2030

Physical

Color	Black
Orientation	Fixed
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	427.14
IP internal	54

Download

Mounting instructions



Photometric Files

LDT / IES




Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2

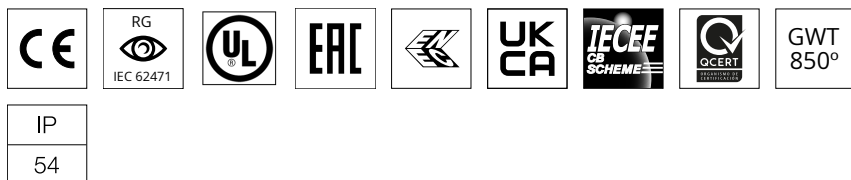

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	14
Beam angle C90-270 (°)	14
Extreme cut off	No
UGRL	<19


Electrical

Forward voltage (V)	36
LED current (mA)	400
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Power supply

SP30W400MA-ELV-U01


Splice Box 7"x2.22"x1.25", 400mA , 30W, ELV Dimmable, Thermal 120V



REQUIRED
Power supply

SP30W600MA-ELV-U02

Splice Box 9" L x 2.5" W x 1.5" H , 600mA , 30W, ELV Dimmable, Thermal 120V




REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-120-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 120V



REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-277-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 277V



REQUIRED
Frame

08.0161.40


Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0161.14


Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0193.00

Installation Frame No Trim Ø90 Fix



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical, place holder for non IC new construction Round, Ø4"

Light Shadow Pro Ø 90 Fixed Optic Medium - Non IC

Designed by FLOS Architectural



LED - LED array - 21.5W - 2026lm - 4000K - CRI> 90 - Beam° 27

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	21.5
System flux (lm)	2026

Physical

Color	Black
Orientation	Fixed
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	427.14
IP internal	54

Download

Mounting instructions



Photometric Files

LDT / IES




Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2

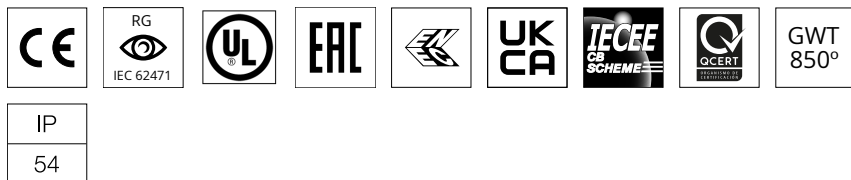

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	27
Beam angle C90-270 (°)	27
Extreme cut off	No
UGRL	<19


Electrical

Forward voltage (V)	36
LED current (mA)	600
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Class 2 Listed.

Accessories & Power Supply




REQUIRED
Power supply

SP30W400MA-ELV-U01
Splice Box 7"x2.22"x1.25", 400mA
, 30W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP30W600MA-ELV-U02
Splice Box 9" L x 2.5" W x 1.5" H ,
600mA , 30W, ELV Dimmable,
Thermal 120V



REQUIRED
Power supply

ACCESSORYTYPE1
SP40W600MA-120-A01
Splice Box UL 9" L x 2.5" W x 1.5"
H, With Driver Programmed to
600mA , 40W, 0-10V Dimmable,
Thermal 120V



REQUIRED
Power supply

ACCESSORYTYPE1
SP40W600MA-277-A01
Splice Box UL 9" L x 2.5" W x 1.5"
H, With Driver Programmed to
600mA , 40W, 0-10V Dimmable,
Thermal 277V




REQUIRED
Frame

08.0161.40
Installation Frame Trim Ø90 Fix




REQUIRED
Frame

08.0161.14
Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0193.00
Installation Frame No Trim Ø90
Fix



OPTIONAL
Housing and Hanger Bar

TRAY-0016
Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4'''



03.9922.14.UQ Black

Light Shadow Pro Ø 90 Fixed Optic Flood - Non IC

Designed by FLOS Architectural



LED - LED array - 21.5W - 1985lm - 4000K - CRI> 90 - Beam° 41

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	21.5
System flux (lm)	1985

Physical

Color	Black
Orientation	Fixed
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	427.14
IP internal	54

Download

Mounting instructions



Photometric Files

LDT / IES




Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2

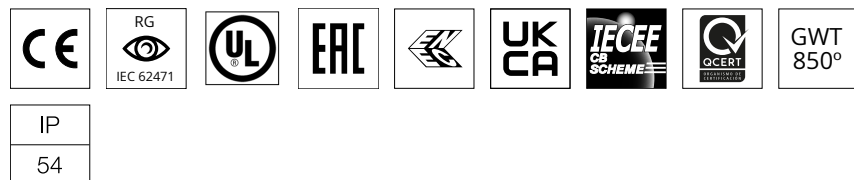

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	41
Beam angle C90-270 (°)	41
Extreme cut off	No
UGRL	<19


Electrical

Forward voltage (V)	36
LED current (mA)	600
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Power supply

SP30W400MA-ELV-U01


Splice Box 7"x2.22"x1.25", 400mA , 30W, ELV Dimmable, Thermal 120V



REQUIRED
Power supply

SP30W600MA-ELV-U02

Splice Box 9" L x 2.5" W x 1.5" H , 600mA , 30W, ELV Dimmable, Thermal 120V




REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-120-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 120V



REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-277-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 277V



REQUIRED
Frame

08.0161.40


Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0161.14


Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0193.00

Installation Frame No Trim Ø90 Fix



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical, place holder for non IC new construction Round, Ø4"

Light Shadow Pro Ø 90 Fixed Optic Wide Flood - Non IC

Designed by FLOS Architectural



LED - LED array - 21.5W - 2065lm - 4000K - CRI> 90 - Beam° 47

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	21.5
System flux (lm)	2065

Physical

Color	Black
Orientation	Fixed
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	427.14
IP internal	54

Download

Mounting instructions



Photometric Files

LDT / IES




Ecodesign and Energy Labelling




REPLACEABLE2



PWSUPRPL2

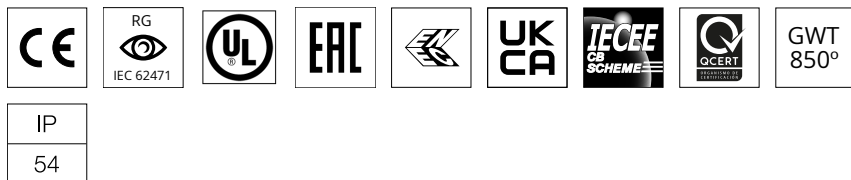

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	47
Beam angle C90-270 (°)	47
Extreme cut off	No
UGRL	<19


Electrical

Forward voltage (V)	36
LED current (mA)	600
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Power supply

SP30W400MA-ELV-U01


Splice Box 7"x2.22"x1.25", 400mA , 30W, ELV Dimmable, Thermal 120V



REQUIRED
Power supply

SP30W600MA-ELV-U02

Splice Box 9" L x 2.5" W x 1.5" H , 600mA , 30W, ELV Dimmable, Thermal 120V




REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-120-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 120V



REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-277-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 277V



REQUIRED
Frame

08.0161.40


Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0161.14


Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0193.00

Installation Frame No Trim Ø90 Fix



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical, place holder for non IC new construction Round, Ø4"



03.9924.14.UQ Black

Light Shadow Pro Ø 90 Fixed Optic Super Spot - Non IC

Designed by FLOS Architectural, 2020



LED - LED array - 14.8W - 1460lm - 4000K - CRI> 90 - Beam° 10

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	14.8
System flux (lm)	1460

Physical

Color	Black
Orientation	Fixed
Length (in)	3.55
Net weight (lb)	0.53
Gross weight (lb)	0.62
Package height (in)	6.19
Package width (in)	8.27
Package length (in)	5.32
Package volume (in)	62
IP internal	20
IP external	54

Download

Mounting instructions



Photometric Files

LDT / IES



Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	10
Beam angle C90-270 (°)	10
Extreme cut off	No
UGRL	<10


Electrical

Forward voltage (V)	38.6
LED current (mA)	400
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Power supply

SP30W400MA-ELV-U01


Splice Box 7"x2.22"x1.25", 400mA , 30W, ELV Dimmable, Thermal 120V



REQUIRED
Power supply

SP30W600MA-ELV-U02

Splice Box 9" L x 2.5" W x 1.5" H , 600mA , 30W, ELV Dimmable, Thermal 120V




REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-120-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 120V




REQUIRED
Power supply

ACCESSORYTYPE1

SP40W600MA-277-A01

Splice Box UL 9" L x 2.5" W x 1.5" H, With Driver Programmed to 600mA , 40W, 0-10V Dimmable, Thermal 277V




REQUIRED
Power supply

ACCESSORYTYPE1

SP25W400MA-120-A01

Splice Box UL 7"x2.22"x1.25", With Driver Programmed to 400mA , 25W, 0-10V Dimmable, Thermal 120V



REQUIRED
Power supply

ACCESSORYTYPE1

SP25W400MA-277-A01

Splice Box UL 7"x2.22"x1.25", With Driver Programmed to 400mA , 25W, 0-10V Dimmable, Thermal 277V



REQUIRED
Frame

08.0161.40



Installation Frame Trim Ø90 Fix



REQUIRED
Frame

08.0161.14

Installation Frame Trim Ø90 Fix



REQUIRED Frame

08.0193.00

Installation Frame No Trim Ø90
Fix

OPTIONAL Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4"

Light Shadow Pro Ø 90 Adjustable Optic Super Spot - Non IC

Designed by FLOS Architectural



LED - LED array - 8.8W - 811lm - 4000K - CRI> 90 - Beam° 9

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	8.8
Source flux (lm)	949
System flux (lm)	811

Physical

Color	Black
Orientation	Adjustable
Rotation (°)	355
Longitudinal tilting (°)	35
Transversal tilting (°)	35
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	244.08
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	9
Beam angle C90-270 (°)	9
UGRL	<10


Electrical

Forward voltage (V)	15.7
LED current (mA)	700
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Frame

08.0165.14


Installation Frame Trim Ø90



REQUIRED
Frame

08.0167.00

Installation Frame No Trim Ø90




REQUIRED
Power supply

ACCESSORYTYPE1

06.0319.00.90

Splice Box UL 120V 700mA 1-10V



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4'''



OPTIONAL
Accessory

ACCESSORYTYPE3

08.0826.00

Orientation Toolkit

Light Shadow Pro Ø 90 Adjustable Optic Spot - Non IC

Designed by FLOS Architectural



LED - LED array - 14.8W - 1291lm - 4000K - CRI> 90 - Beam° 15

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	14.8
Source flux (lm)	1100
System flux (lm)	1291

Physical

Color	Black
Orientation	Adjustable
Rotation (°)	355
Longitudinal tilting (°)	35
Transversal tilting (°)	35
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	244.08
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	15
Beam angle C90-270 (°)	15
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	38.5
LED current (mA)	400
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Frame

08.0165.14


Installation Frame Trim Ø90



REQUIRED
Frame

08.0167.00

Installation Frame No Trim Ø90




REQUIRED
Power supply

ACCESSORYTYPE1

06.0319.00.90


Splice Box UL 120V 700mA 1-10V



REQUIRED
Power supply

SP30W400MA-120-U01


Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP30W400MA-277-U01


Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W400MA-ELV-U01

Splice Box 7"x2.22"x1.25", 400mA
, 30W, ELV Dimmable, Thermal
120V



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4"



OPTIONAL
Accessory

ACCESSORYTYPE3

08.0826.00

Orientation Toolkit

Light Shadow Pro Ø 90 Adjustable Optic Medium - Non IC

Designed by FLOS Architectural



LED - LED array - 14.8W - 1302lm - 4000K - CRI> 90 - Beam° 23

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	14.8
Source flux (lm)	1100
System flux (lm)	1302

Physical

Color	Black
Orientation	Adjustable
Rotation (°)	355
Longitudinal tilting (°)	35
Transversal tilting (°)	35
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	244.08
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Ecodesign and Energy Labelling




REPLACEABLE2



PWRSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	23
Extreme cut off	No
UGRL	<10


Electrical

Forward voltage (V)	38.5
LED current (mA)	400
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.


Accessories & Power Supply



REQUIRED
Frame

08.0165.14


Installation Frame Trim Ø90



REQUIRED
Frame

08.0167.00

Installation Frame No Trim Ø90




REQUIRED
Power supply

ACCESSORYTYPE1

06.0319.00.90


Splice Box UL 120V 700mA 1-10V



REQUIRED
Power supply

SP30W400MA-120-U01


Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP30W400MA-277-U01


Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W400MA-ELV-U01

Splice Box 7"x2.22"x1.25", 400mA
, 30W, ELV Dimmable, Thermal
120V



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4"



OPTIONAL
Accessory

ACCESSORYTYPE3

08.0826.00

Orientation Toolkit

Light Shadow Pro Ø 90 Adjustable Optic Flood - Non IC

Designed by FLOS Architectural



LED - LED array - 14.8W - 1358lm - 4000K - CRI> 90 - Beam° 33

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Lamp category	LED
Number of lamps	1
Power (W)	14.8
Source flux (lm)	1100
System flux (lm)	1358

Physical

Color	Black
Orientation	Adjustable
Rotation (°)	355
Longitudinal tilting (°)	35
Transversal tilting (°)	35
Net weight (lb)	0.49
Gross weight (lb)	0.75
Package volume (in)	244.08
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Ecodesign and Energy Labelling




REPLACEABLE2



PWSUPRPL2



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	2
LED Life / Failure Ratio	L70B40 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	33
Beam angle C90-270 (°)	33
Extreme cut off	No
UGRL	<10

Electrical


Forward voltage (V)	38.5
LED current (mA)	400
Driver	Attached Splice Box
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Class 2 Listed.




Accessories & Power Supply



REQUIRED
Frame

08.0165.14


Installation Frame Trim Ø90



REQUIRED
Frame

08.0167.00

Installation Frame No Trim Ø90




REQUIRED
Power supply

ACCESSORYTYPE1

06.0319.00.90


Splice Box UL 120V 700mA 1-10V



REQUIRED
Power supply

SP30W400MA-120-U01


Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP30W400MA-277-U01


Splice Box 7"x2.22"x1.25", 400mA ,
30W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W400MA-ELV-U01

Splice Box 7"x2.22"x1.25", 400mA
, 30W, ELV Dimmable, Thermal
120V



OPTIONAL
Housing and Hanger Bar

TRAY-0016

Registration Tray - non electrical,
place holder for non IC new
construction Round, Ø4"



OPTIONAL
Accessory

ACCESSORYTYPE3

08.0826.00

Orientation Toolkit