



1155

Design By Ramos & Bassols

Top is a wall lamp that comes in a range of balanced colors that help to create very warm atmospheres. The Top collection offers indirect light that is confined within its diameter, forming a contrast with the outer part of the lamp.

Spec sheet

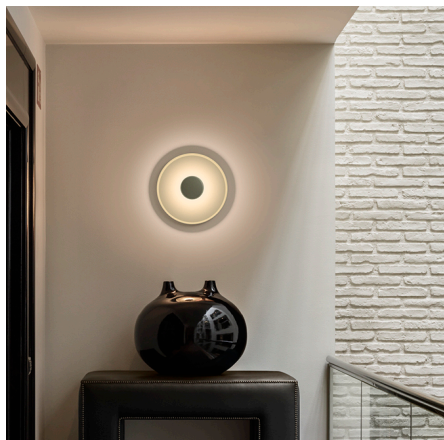

Finish

- 10 White
NCS S 0300-N
- 47 Green L1
NCS S 4005-G80Y
- 40 Blue L1
NCS S 3010-B
- 36 Soft Pink
NCS S 1010-Y50R

LED 2700 K / 3500 K

Control Push; 1-10V; DALI-2 / TRIAC

Electrical connection Surface

Light source 1 x LED PLATE 18,3W 500mA

LED CRI>90 2050 lm 112

Driver	Constant Current 500 mA 110~127 V 50/60 Hz
--------	---

Dimmable LED IP20 cULus ADA Dry Location


Application	Wall
-------------	------

Packaging	1 Box 21.97 in x 21.97 in x 10.04 in Gross weight 3.96 lbs Net weight 3.3 lbs Vol. 2.8005 ft3
------------------	---



Lighting effect

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric Data

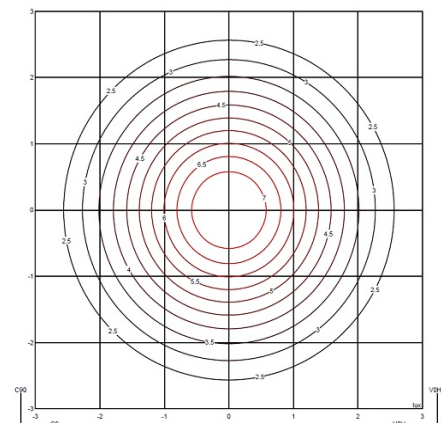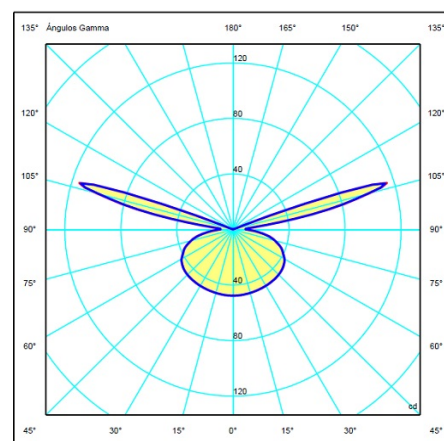

Efficiency	21.06 lm/W
------------	------------

Total Flux	349.72 lm
Maximum Value	112.03 cd

VIBIA, INC.

USA & CANADA
272 Fernwood Ave. Edison, NJ 08837. USA
T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS
Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Top


1160

Design By Ramos & Bassols

VIBIA

Top is a ceiling or wall lamp that comes in a range of balanced colors that help to create very warm atmospheres. The Top collection offers indirect light that is confined within its diameter, forming a contrast with the outer part of the lamp.

Spec sheet



Finish

- 10 White
NCS S 0300-N
- 40 Blue L1
NCS S 3010-B
- 36 Soft Pink
NCS S 1010-Y50R
- 47 Green L1
NCS S 4005-G80Y

LED 2700 K / 3500 K

Control Push; 1-10V; DALI-2 / TRIAC

Electrical connection Surface

Light source 1 x LED PLATE 26,4W 700mA

LED CRI>90 2880 lm 109.10

Driver Constant Current 700 mA 110~127 V 50/60 Hz

Dimmable LED IP20  ADA 


Application Ceiling

Packaging 1 Box
29.92 in x 29.92 in x 10.63 in
Gross weight 6.89 lbs
Net weight 5.51 lbs
Vol. 5.5056 ft3



Lighting effect

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric Data

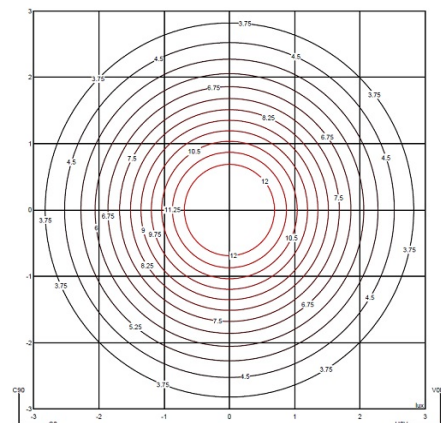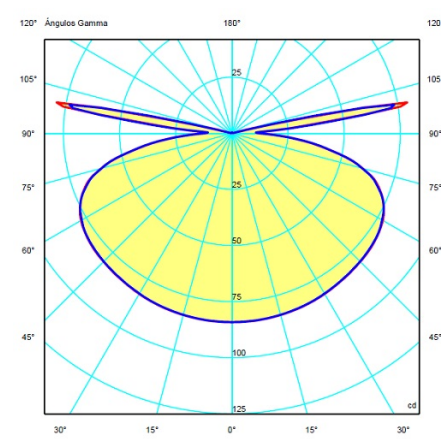


Top 1170

Design By Ramos & Bassols

VIBIA

Top 1170 is a ceiling and wall lamp. It features simple lines that blend in with the surfaces attached. The light reflected by the glass diffuser is confined within the rosette as if the light were framed.

Spec sheet

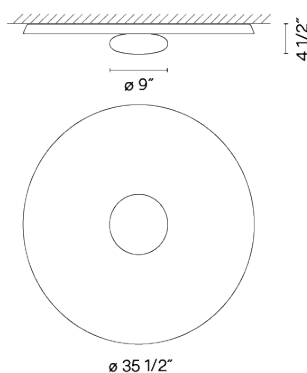

Finish

- 36 Soft Pink
NCS S 1010-Y50R
- 10 White
NCS S 0300-N
- 40 Blue L1
NCS S 3010-B
- 47 Green L1
NCS S 4005-G80Y

LED

2700 K / 3500 K

Control

PUSH 1-10V DALI

Electrical connection Surface

Light source

3 x LED 13,4W 700mA

LED

CRI>90 3300 lm 82.08

Driver

Constant Current 700 mA 110~127 V
50/60 Hz

Dimmable LED IP20  Dry Location

Application

Ceiling


Packaging

1 Box
44.09 in x 44.09 in x 13.58 in
Gross weight 16.96 lbs
Net weight 11.67 lbs
Vol. 15.2808 ft³



Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

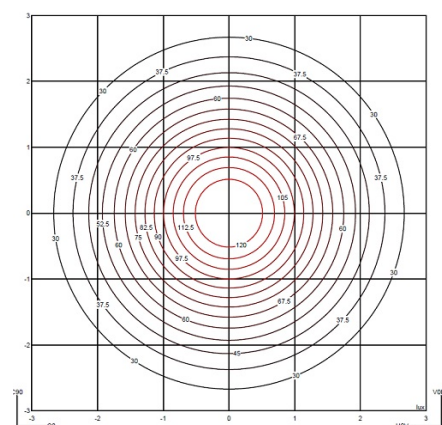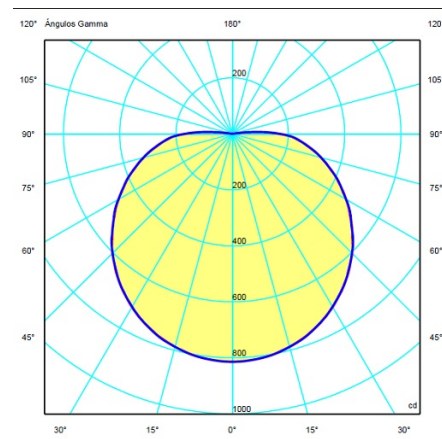

Efficiency

66.69 lm/W

Total Flux

3103,46lm

Maximum Value

813,96cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)