

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot. The professional area at Vibia.com offers a dynamic space for designers to create their projects for a seamless ordering process.



Luminaire finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

LED color temperature

2700 K / 3000 K / 3500 K.

Dimming control options

On/ Off.
Simultaneous line DALI, 0-10V, Push, Casambi. Casambi integrated on each individual luminaire (P2P).

Electrical connection options

Surface
Remote Surface
Remote Recessed
Plug-in

Belt

Polyester.

- Black
- Terra Red
- Blue
- Green
- Beige

Remarks


Maximum 96 feet length per electrical connection point.

Fire Hazard Testing, GW-960. Fulfills the requirements of: standards EN 60695-2-10:2013; EN 60695-2-11:2015; EN 60695-2-12:2011 / A1:2014

Installation and assembly:

Please, see the installation manual.

www.vibia.com ► Professional area and together with the product you'll receive a personalized installation guide with all the details of your composition and guidance for its correct and easy installation.



Sphere

360° Diffusion lighting




Ø 7 3/4"
6230



Ø 11 3/4"
6235

6230



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
1 x LED 7.9 W 450mA.
846 lm. 107.09 lm/W.

Packaging


1 Box
10 1/4" x 10 1/4" x 10 1/4"
Vol. 0.618 ft³.
Gross weight 3.44 lbs.
Net weight 2.05 lbs.

Dimming control

- 6230_/_/0 On/ Off
- 6230_/_/F Simultaneous line DALI, 0-10V, Push, Casambi
- 6230_/_/Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

6235



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.



Packaging

1 Box
14 1/4" x 14 1/4" x 14 1/4"
Vol. 1.702 ft³.
Gross weight 5.51 lbs.
Net weight 3.97 lbs.

Dimming control

- 6235_/_/0 On/ Off
- 6235_/_/F Simultaneous line DALI, 0-10V, Push, Casambi
- 6235_/_/Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

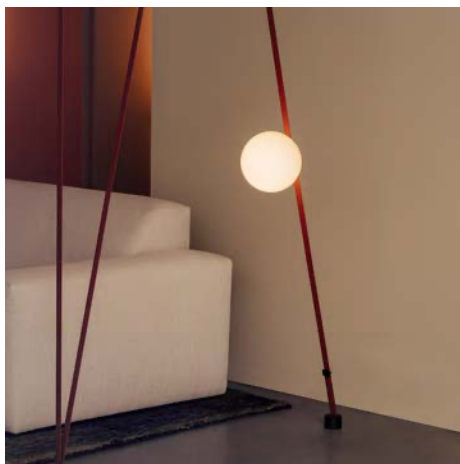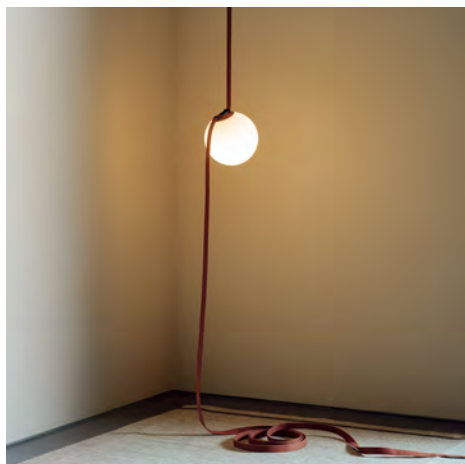

Semisphere

Directed diffusion lighting




Ø 7 3/4"
6220



Ø 11 3/4"
6225

6220



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
1 x LED 7.9 W 450mA.
846 lm. 107.09 lm/W.

Packaging


1 Box
10 1/4" x 10 1/4" x 10 1/4".
Vol. 0.618 ft³.
Gross weight 2.64 lbs.
Net weight 1.72 lbs.

Dimming control

- 6220_/_0 On/ Off
- 6220_/_F Simultaneous line DALI, 0-10V, Push, Casambi
- 6220_/_Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

6225



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.


Packaging

1 Box
14 1/4" x 14 1/4" x 14 1/4".
Vol. 1.702 ft³.
Gross weight 4.41 lbs.
Net weight 3.31 lbs.

Dimming control

- 6225_/_0 On/ Off
- 6225_/_F Simultaneous line DALI, 0-10V, Push, Casambi
- 6225_/_Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

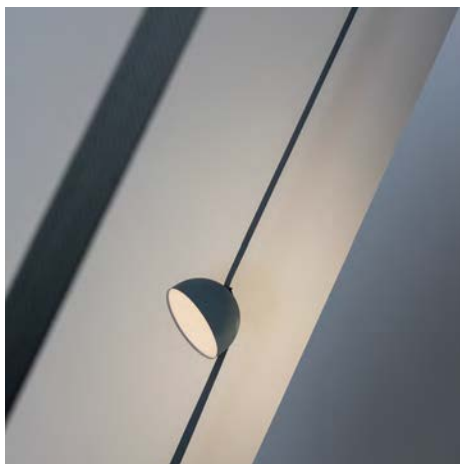

Cone

Directed diffusion lighting




Ø 23 1/2"
6240



Ø 31 1/2"
6245

6240



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
- 1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.

Packaging


1 Box
28 1/2" x 28 1/2" x 12 1/2".
Vol. 5.972 ft³.
Gross weight 11.02 lbs.
Net weight 5.51 lbs.

Dimming control

- 6240_/_0 On/ Off
- 6240_/_F Simultaneous line DALI, 0-10V, Push, Casambi
- 6240_/_Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

6245



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- Ⓢ
- 1 x LED 16 W 850mA.
1492 lm. 93.25 lm/W.

Packaging

1 Box
37 3/4" x 37 3/4" x 10 1/2".
Vol. 8.786 ft³.
Gross weight 15.43 lbs.
Net weight 7.72 lbs.

Dimming control


- 6245_/_0 On/ Off
- 6245_/_F Simultaneous line DALI, 0-10V, Push, Casambi
- 6245_/_Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable



Spotlight

Accent lighting

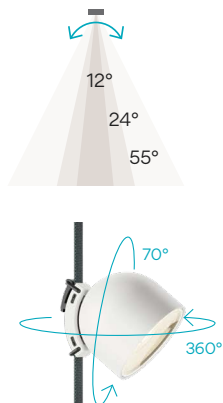

12°



6200




Ø 4"
6200

Medium flood 24°



6205

Wide flood 55°




6210



Ø 4"
6205 6210

6200



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
916 lm. 115.95 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.


Dimming control

6200_/_0 On/ Off
6200_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6200_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

6205

Medium flood 24°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
916 lm. 115.95 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.


Dimming control

6205_/_0 On/ Off
6205_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6205_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

6210

Wide flood 55°



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

/1_ LED 2700 K. CRI >90.
/2_ LED 3000 K. CRI >90.
/3_ LED 3500 K. CRI >90.
Ⓢ
1 x LED 7.9 W 450mA.
916 lm. 115.95 lm/W.

Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.



Dimming control

6210_/_0 On/ Off
6210_/_F Simultaneous line
DALI, 0-10V, Push, Casambi
6210_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 cULus Dimmable

Spotlight


Directed diffusion lighting



Ø 4"
6215

6215

Directed diffusion lighting



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Light Source

- /1_ LED 2700 K. CRI >90.
 - /2_ LED 3000 K. CRI >90.
 - /3_ LED 3500 K. CRI >90.
- 1 x LED 4.2 W 250mA.
491 lm. 116.9 lm/W.


Packaging

1 Box
7 1/2" x 6 1/4" x 5 3/4".
Vol. 0.162 ft³.
Gross weight 1.59 lbs.
Net weight 1.12 lbs.

Dimming control


- 6215_/_/0 On/ Off
- 6215_/_/F Simultaneous line DALI, 0-10V, Push, Casambi
- 6215_/_/Z Casambi integrated on each individual luminaire (P2P)

LED IP20 Dimmable

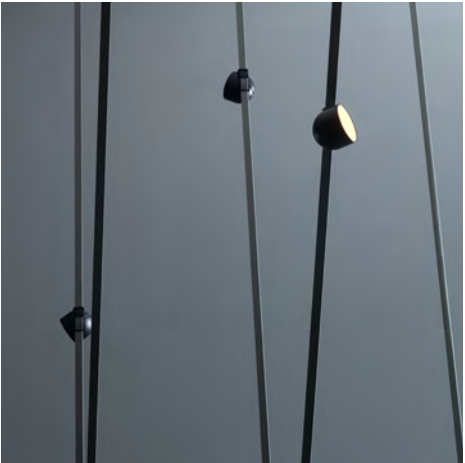

Linear Diffuser

General lighting

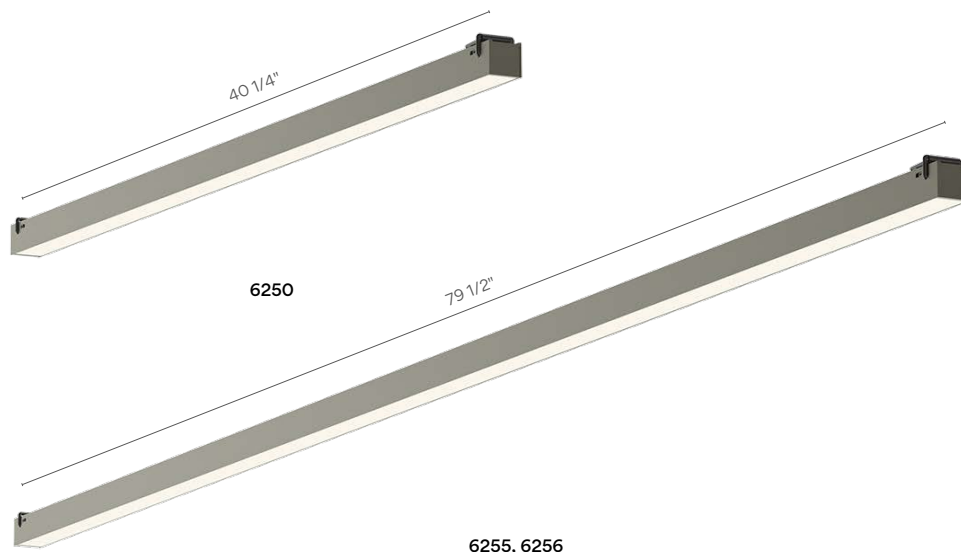

6250



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20.6W 24V.
2544 lm. 123.3 lm/W.

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
2 1/4" x 2 1/4" x 49 1/4".
Vol. 0.201 ft³.
Gross weight 3.31 lbs.
Net weight 1.59 lbs.

Dimming control


6250_/_/_0 On/ Off

6250_/_/_F Simultaneous line
DALI, 0-10V, Push, Casambi

6250_/_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6255



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41.3 W 24V.
5088 lm. 123.3 lm/W.

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
2 1/4" x 2 1/4" x 88 1/4".
Vol. 0.364 ft³.
Gross weight 4.41 lbs.
Net weight 3.20 lbs.

Dimming control


6255_/_/_0 On/ Off

6255_/_/_F Simultaneous line
DALI, 0-10V, Push, Casambi

6255_/_/_Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6256 Low Wattage Model



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 32 W 24V.
4579 lm. 143 lm/W.

Materials

Shade: Aluminum.
Diffuser: Polycarbonate.

Packaging

1 Box
2 1/4" x 2 1/4" x 88 1/4".
Vol. 0.364 ft³.
Gross weight 4.41 lbs.
Net weight 3.20 lbs.

Dimming control

6256_/_/_0 On/ Off



6256_/_/_F Simultaneous line
DALI, 0-10V, Push, Casambi

6256_/_/_Z Casambi integrated on each
individual luminaire (P2P)


LED IP20 Dimmable

Linear Low UGR - High-Comfort

High-comfort,
low-glare general linear lighting

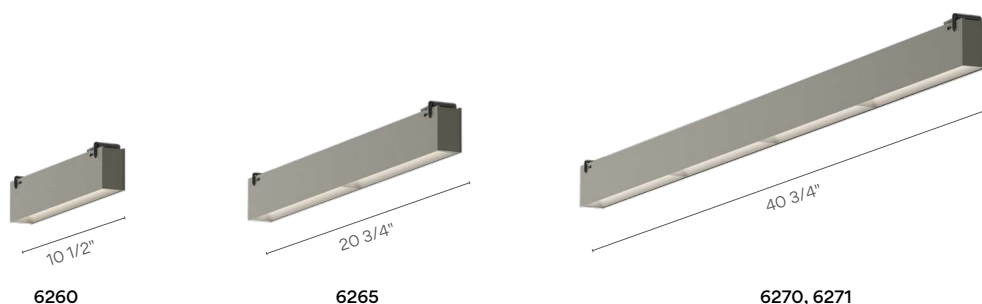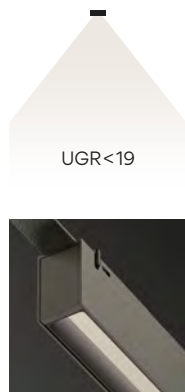

6260



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 10.3W 24V.
1336 lm. 132.43 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 12 1/4".
Vol. 0.099 ft³.
Gross weight 1.76 lbs.
Net weight 0.90 lbs.

Dimming control


6260_/_/0 On/ Off

6260_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6260_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6265



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20.6W 24V.
2731 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 22 1/2".
Vol. 0.177 ft³.
Gross weight 3.31 lbs.
Net weight 1.96 lbs.

Dimming control


6265_/_/0 On/ Off

6265_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6265_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6270



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41.3W 24V.
5462 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 43 1/4".
Vol. 0.339 ft³.
Gross weight 5.51 lbs.
Net weight 3.31 lbs.

Dimming control


6270_/_/0 On/ Off

6270_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6270_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6271 Low Wattage Model



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 32W 24V.
4611.6 lm. 144.1 lm/W.

UGR <19.

Materials

Shade: Aluminum.
Diffuser: PET.

Packaging

1 Box
3 1/4" x 4 1/4" x 43 1/4".
Vol. 0.339 ft³.
Gross weight 5.51 lbs.
Net weight 3.31 lbs.

Dimming control

6271_/_/0 On/ Off



6271_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6271_/_/Z Casambi integrated on each
individual luminaire (P2P)


LED IP20 Dimmable

Linear Low UGR - High-Efficiency

High-efficiency,
low-glare general linear lighting

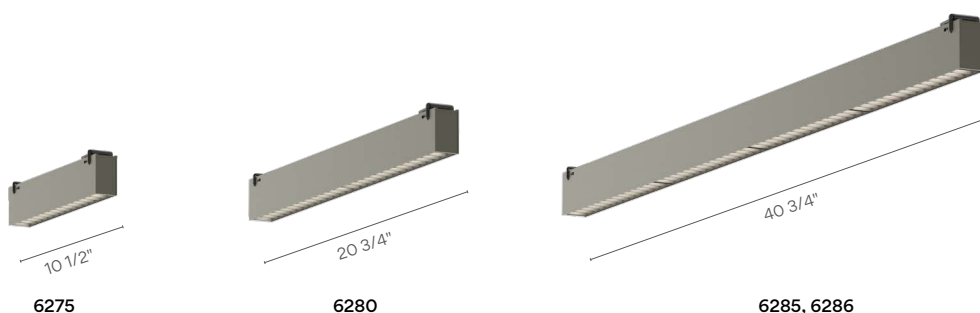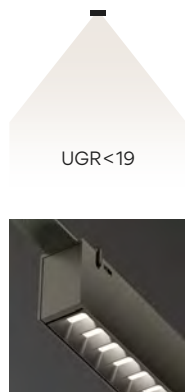

6275



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 10.3W 24V.
1336 lm. 132.43 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 12 1/4". Vol. 0.099 ft³.
Gross weight 1.76 lbs.
Net weight 0.90 lbs.

Dimming control


6275_/_/0 On/ Off

6275_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6275_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6280



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 20.6W 24V.
2731 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 22 1/2".
Vol. 0.177 ft³.
Gross weight 3.31 lbs.
Net weight 1.96 lbs.

Dimming control


6280_/_/0 On/ Off

6280_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6280_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6285



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 41.3W 24V.
5462 lm. 132.3 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 43 1/4".
Vol. 0.339 ft³.
Gross weight 5.51 lbs.
Net weight 3.31 lbs.

Dimming control


6285_/_/0 On/ Off

6285_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6285_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

6286 Low Wattage Model



Finishes

- 11 Black (NCS S 8500-N)
- 24 Beige M1 (NCS S 2005-Y50R)
- 37 Terra Red (NCS S 4040-Y70R)
- 42 Blue M1 (NCS S 5010-B10G)
- 53 Green M1 (NCS S 6005-G80Y)

Light Source

- /1_ LED 2700 K. CRI >90.
- /2_ LED 3000 K. CRI >90.
- /3_ LED 3500 K. CRI >90.

1 x LED STRIP 32W 24V.
4611.6 lm. 144.1 lm/W.

UGR <19.

Materials

Shade: Aluminum.

Packaging

1 Box
3 1/4" x 4 1/4" x 43 1/4".
Vol. 0.339 ft³.
Gross weight 5.51 lbs.
Net weight 3.31 lbs.

Dimming control

6286_/_/0 On/ Off

6286_/_/F Simultaneous line
DALI, 0-10V, Push, Casambi

6286_/_/Z Casambi integrated on each
individual luminaire (P2P)

LED IP20 Dimmable

Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.



Electrical connection options

Choose your preferred installation
option according to your needs.



Surface



Remote
Recessed



Surface



Plug-in




Optional wire
connector

Dimming control options

Choose your preferred installation
option according to your needs.

Dimming Control	Electrical Connection		
	Surface 25 - 100 W	Remote 25 - 100 W	Plug-in Max 60W
On / Off	✓	✓	✓
Push Switch	—	—	✓
Push Simultaneous	✓	✓	—
0-10V Simultaneous	✓	✓	—
DALI Simultaneous	✓	✓	—
Casambi Simultaneous	✓	✓	—
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓



Surface Canopy S

E1 Ø 8"

Wattage options:
< 60W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 2.0 lbs.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Surface Canopy M

E2 Ø 10 1/4"

Wattage options:
<100W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 4.0 lbs.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Remote Recessed Canopy

E4 Ø 2 3/4"

Wattage options:
>25W.
<100W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.
Net weight 1.9 - 3.4 lbs.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Remote Surface Canopy

E5 Ø 2 1/4"

Wattage options:
>25W.
<100W.

Driver Constant Voltage 42V.
100~240VAC. 50/60Hz.


Dimming options:

On/ Off.
Simultaneous line DALI / 0-10V / Push / Casambi.
Casambi integrated on each individual luminaire (P2P).

Body: Aluminum.
Net weight 2.1 - 3.8 lb.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Plug-in Floor Switch

E6 Ø 3 1/2"

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.


Dimming options:

On/ Off.
Push.
Casambi integrated on each individual luminaire (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)

IP20  Dimmable



Wire Connector

E8 Wire Ø 1/8"

Wattage options:
< 60W.

Wire connector

E8 Wire Ø 1/4".

Wattage options:
> 60W.
<100W.

Body: ABS.

Cable length option: 118" or 354"

11 Black
(NCS S 8500-N)

IP20 

Plusminus essentials



6200

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	 24 Beige M1 test ral
	 11 Black NCS S 8500N
	42 Blue M1 test ral
	 53 Green M1 NCS S 6005-G80Y
	 37 Terra Red test ral
	 42 Blue M1 NCS S 5010-B10G
LED	2700 K / 3000 K / 3500 K
Control	On/Off / PUSH 1-10V DALI CASAMBI
Electrical connection Surface / Recessed/ Remote Driver	
LED	CRI>90 846 lm 107.09
Application	Lighting Toolkit
Packaging	1 Box 0.148 in x 0.161 in x 0.193 in Gross weight 0.719 lbs Net weight 0.513 lbs Vol. 0.0045 ft3

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA
272 Fernwood Ave. Edison, NJ 08837. USA
T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS
Progrés 4-6. 08850 Gavà
(Barcelona - Spain)

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	 42 Blue M1 NCS S 5010-B10G	Medium Accent Spotlight Angles between 20° and 40°. Suitable for generating medium contrasts or projections from medium
	 24 Beige M1 test ral	
	 11 Black NCS S 8500N	
	 53 Green M1 test ral	
	 42 Blue M1 test ral	
	 37 Terra Red NCS S 4040-Y70R	
LED	2700 K / 3000 K / 3500 K	
Control	CASAMBI / On/Off / PUSH 1-10V	
Electrical connection	Surface / Recessed/ Remote Driver	
LED	CRI>90 846 lm 107,09	
Application	Lighting Toolkit	
Packaging	1 Box 0.148 in x 0.161 in x 0.193 in Gross weight 0.714 lbs Net weight 0.508 lbs Vol. 0.0045 ft3	
Efficiency		0
Total Flux		0
Maximum Value		0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish		37	Terra Red
			test ral
		42	Blue M1
			NCS S 5010-B10G
		11	Black
			NCS S 8500N
		53	Green M1
			NCS S 6005-G80Y
		24	Beige M1
			test ral
		42	Blue M1
			test ral
LED	2700 K / 3000 K / 3500 K		
Control	PUSH 1-10V DALI CASAMBI / On/Off		
Electrical connection	Surface / Recessed/ Remote Driver		
LED	CRI>90 916 lm 115.95		
Application	Lighting Toolkit		
Packaging	1 Box 0.148 in x 0.161 in x 0.193 in Gross weight 0.714 lbs Net weight 0.508 lbs Vol. 0.0045 ft3		

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	11Black NCS S 8500N 37Terra Red test ral 42Blue M1 test ral 42Blue M1 NCS S 5010-B10G 53Green M1 test ral 24Beige M1 test ral
LED	2700 K / 3000 K / 3500 K
Control	PUSH 1-10V DALI CASAMBI / PUSH
Electrical connection	Surface / Recessed/ Remote Driver
LED	CRI>90 0
Application	Lighting Toolkit
Packaging	1 Box 0.148 in x 0.161 in x 0.193 in Gross weight 0.714 lbs Net weight 0.508 lbs Vol. 0.0045 ft3

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

[illegible]

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

	Finish	24 Beige M1 NCS S2005-Y50R 37 Terra Red NCS S 4040-Y70R 11 Black NCS S 8500N 53 Green M1 test ral 42 Blue M1 NCS S 5010-B10G 42 Blue M1 test ral	Close Proximity Lighting applications for illumination in close proximity to the user
	LED	2700 K / 3000 K / 3500 K	
	Control	CASAMBI / On/Off / PUSH 1-10V	
	Electrical connection	Surface / Recessed/ Remote Driver	
	LED	1492 lm 93.25	
	Application	Lighting Toolkit	
	Packaging	1 Box 0.364 in x 0.364 in x 0.364 in Gross weight 3.043 lbs Net weight 1.513 lbs Vol. 0.0482 ft3	
			Efficiency 0
			Total Flux 0
			Maximum Value 0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish

53

Green M1

NCS S 6005-G80Y

11

Black

NCS S 8500N

42

Blue M1

NCS S 5010-B10G

24

Beige M1

test ral

42

Blue M1

test ral

37

Terra Red

NCS S 4040-Y70R

LED

2700 K / 3000 K / 3500 K

Control

PUSH 1-10V DALI CASAMBI / On/Off

Electrical connection

Surface / Recessed/ Remote Driver

LED

CRI>90 846 lm 107.09

Application

Lighting Toolkit

Packaging

1 Box
0.26 in x 0.26 in x 0.26 in
Gross weight 1.56 lbs
Net weight 0.938 lbs
Vol. 0.0175 ft3

Volumetric Diffuser

Subtly directed, diffused light that generates a soft hierarchy of light on to the illuminated surface

Efficiency 59.88 lm/W

Total Flux 525.45 lm
Maximum Value 55.08 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish

 42 Blue M1
NCS S 5010-B10G

 37 Terra Red
NCS S 4040-Y70R

 11 Black
NCS S 8500N

42 Blue M1
test ral

 24 Beige M1
test ral

 53 Green M1
NCS S 6005-G80Y

LED

2700 K / 3000 K / 3500 K

Control

On/Off / CASAMBI / PUSH 1-10V

Electrical connection Surface / Recessed/ Remote Driver

LED

CRI>90 1492 lm 93.25

Application

Lighting Toolkit

Packaging

1 Box
0.364 in x 0.364 in x 0.364 in
Gross weight 3.35 lbs
Net weight 1.82 lbs
Vol. 0.0482 ft3

General lighting

Lamp for general lighting that equally distributes the light in all directions.

Efficiency 67.38 lm/W

Total Flux 1158.70 lm
Maximum Value 106.16 cd

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish		37	Terra Red	NCS S 4040-Y70R
		11	Black	NCS S 8500N
		42	Blue M1	test ral
		53	Green M1	test ral
		24	Beige M1	NCS S2005-Y50R
		42	Blue M1	NCS S 5010-B10G
LED	2700 K / 3000 K / 3500 K			
Control	PUSH 1-10V DALI CASAMBI / PUSH			
Electrical connection	Surface / Recessed/ Remote Driver			
LED	CRI>90 1569 lm 98.06			
Application	Lighting Toolkit			
Packaging	1 Box 0.727 in x 0.727 in x 0.32 in Gross weight 6.5 lbs Net weight 2.5 lbs Vol. 0.1691 ft3			

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA
272 Fernwood Ave. Edison, NJ 08837. USA
T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS
Progrés 4-6. 08850 Gavá
(Barcelona - Spain)

Plusminus essentials

6245



Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish		37 Terra Red test ral
		11 Black NCS S 8500N
		53 Green M1 NCS S 6005-G80Y
		42 Blue M1 test ral
		42 Blue M1 NCS S 5010-B10G
		24 Beige M1 NCS S2005-Y50R
LED	2700 K / 3000 K / 3500 K	
Control	PUSH 1-10V DALI CASAMBI /	
Electrical connection	Surface / Recessed/ Remote Driver	
LED	CRI>90 1492 lm 93.25	
Application	Lighting Toolkit	
Packaging	1 Box 0.96 in x 0.96 in x 0.27 in Gross weight 10.6 lbs Net weight 3.46 lbs Vol. 0.2488 ft3	
Close Proximity		
Lighting applications for illumination in close proximity to the user		
Efficiency	0	
Total Flux	0	
Maximum Value	0	

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

	Finish	37Terra Red NCS S 4040-Y70R 42Blue M1 NCS S 5010-B10G 24Beige M1 NCS S2005-Y50R 11Black NCS S 8500N 53Green M1 NCS S 6005-G80Y 42Blue M1 test ral	Linear Linear lighting applications for functional and graphic illumination
	LED	2700 K / 3000 K / 3500 K	
	Control	CASAMBI / On/Off / PUSH 1-10V	
	Electrical connection	Surface / Recessed/ Remote Driver	
	LED	CRI>90 2544 lm 123.5	
	Application	Lighting Toolkit	
	Packaging	1 Box 1.25 in x 0.068 in x 0.068 in Gross weight 1 lbs Net weight 0.72 lbs Vol. 0.0057 ft3	
			Efficiency 0
			Total Flux 0
			Maximum Value 0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Spec sheet

Finish

-  11 Black
NCS S 8500N
-  53 Green M1
NCS S 6005-G80Y
-  37 Terra Red
NCS S 4040-Y70R
-  42 Blue M1
NCS S 5010-B10G
- 42 Blue M1
test ral
-  24 Beige M1
NCS S2005-Y50R

LED

2700 K / 3000 K / 3500 K

Control

On/Off / CASAMBI / PUSH 1-10V

Electrical connection

Surface / Recessed/ Remote Driver

LED

CRI>90 5088 lm 123.2

Application

Lighting Toolkit

Packaging

1 Box
2.24 in x 0.068 in x 0.06 in
Gross weight 2 lbs
Net weight 1.44 lbs
Vol. 0.0091 ft3

Linear

Linear lighting applications for functional and graphic illumination

Efficiency

71.109 lm/W

Total Flux



3207 lm

Maximum Value

336.04 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Spec sheet

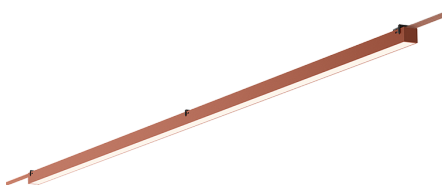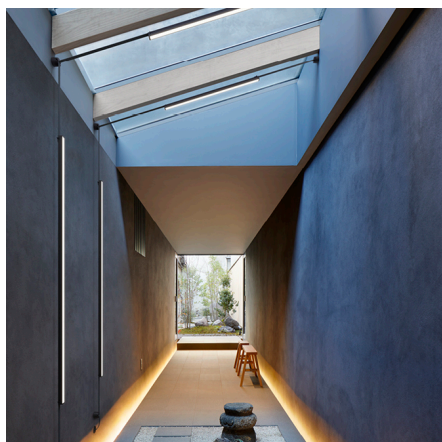

Finish

37 Terra Red
NCS S 4040-Y70R

53 Green M1
test ral

42 Blue M1
test ral

42 Blue M1
NCS S 5010-B10G

24 Beige M1
test ral

11 Black
NCS S 8500N

LED

2700 K / 3000 K / 3500 K

Control

On/Off / PUSH 1-10V DALI CASAMBI

Electrical connection Surface / Recessed/ Remote Driver

LED

CRI>90 4881.6 lm 122.04

Application

Lighting Toolkit



Packaging

1 Box
88.19 in x 2.68 in x 2.36 in
Gross weight 4.41 lbs
Net weight 3.17 lbs
Vol. 0.3214 ft3

Lighting effect



Photometric Data

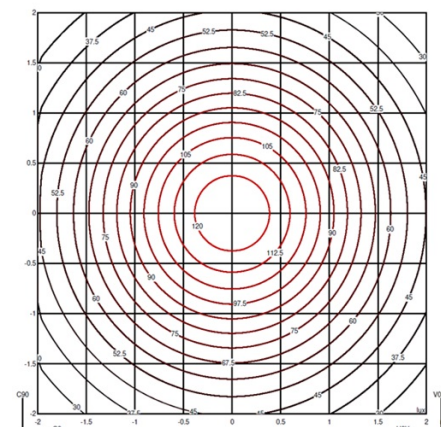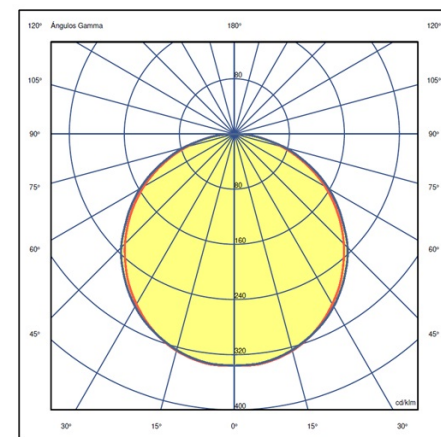

Efficiency 71.109 lm/W

Total Flux 3207 lm

Maximum Value 336.04 cd/klm

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish		11 Black NCS S 8500N
		53 Green M1 test ral
		37 Terra Red NCS S 4040-Y70R
		42 Blue M1 NCS S 5010-B10G
		24 Beige M1 NCS S2005-Y50R
		42 Blue M1 test ral
LED	2700 K / 3000 K / 3500 K	
Control	On/Off / CASAMBI / PUSH 1-10V	
Electrical connection	Surface / Recessed/ Remote Driver	
LED	CRI>90 1323 lm 128.45	
Application	Pendant	
Packaging	1 Box 0.32 in x 0.105 in x 0.08 in Gross weight 0.61 lbs Net weight 0.41 lbs Vol. 0.0026 ft3	

Efficiency	0
Total Flux	0
Maximum Value	0

Optional: undefined

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Plusminus essentials



6265

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	42 Blue M1 test ral
	11 Black NCS S 8500N
	37 Terra Red test ral
	24 Beige M1 NCS S2005-Y50R
	42 Blue M1 NCS S 5010-B10G
	53 Green M1 NCS S 6005-G80Y
LED	2700 K / 3000 K / 3500 K
Control	PUSH 1-10V DALI CASAMBI / On/Off
Electrical connection	Surface / Recessed/ Remote Driver
LED	CRI>90 0
Application	Lighting Toolkit
Packaging	1 Box 0.57 in x 0.105 in x 0.08 in Gross weight 1.29 lbs Net weight 0.89 lbs Vol. 0.0047 ft3

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	 53 Green M1 NCS S 6005-G80Y
	42 Blue M1 test ral
	 42 Blue M1 NCS S 5010-B10G
	 24 Beige M1 NCS S2005-Y50R
	 11 Black NCS S 8500N
	 37 Terra Red NCS S 4040-Y70R
LED	2700 K / 3000 K / 3500 K
Control	PUSH 1-10V DALI CASAMBI / PUSH
Electrical connection Surface / Recessed/ Remote Driver	
LED	CRI>90 0
Application	Lighting Toolkit
Packaging	1 Box 1.09 in x 0.105 in x 0.08 in Gross weight 2.31 lbs Net weight 1.51 lbs Vol. 0.0091 ft3

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com



Plusminus essentials

6271

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

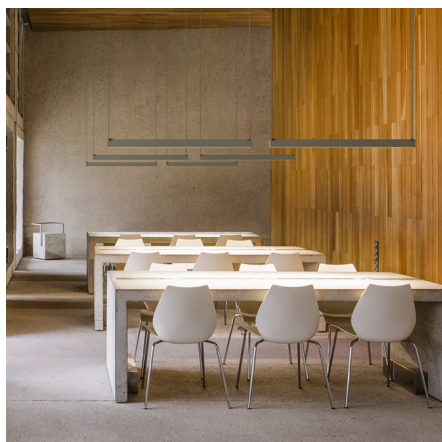

Finish

- 53 Green M1
test ral
- 42 Blue M1
NCS S 5010-B10G
- 11 Black
NCS S 8500N
- 24 Beige M1
NCS S2005-Y50R
- 42 Blue M1
test ral
- 37 Terra Red
NCS S 4040-Y70R

LED

2700 K / 3000 K / 3500 K

Control

On/Off / PUSH 1-10V DALI CASAMBI

Electrical connection Surface / Recessed/ Remote Driver

LED

CRI>90 4763.7 lm 1190925


Application

Lighting Toolkit



Packaging

1 Box
42.91 in x 4.13 in x 3.15 in
Gross weight 5.09 lbs
Net weight 3.33 lbs
Vol. 0.3214 ft3

Lighting effect



Photometric Data

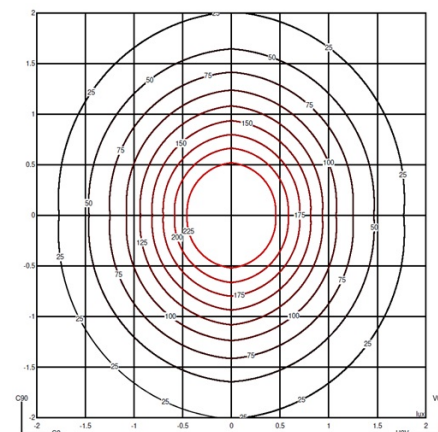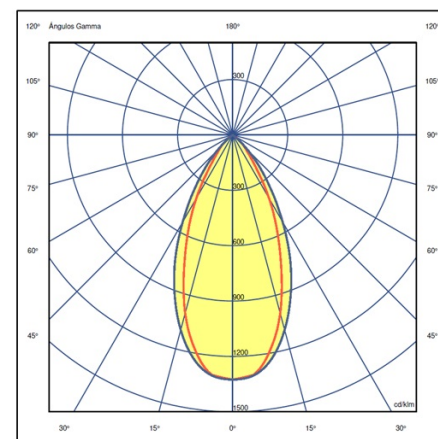

Efficiency 0

Total Flux 0

Maximum Value 0

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavá
(Barcelona - Spain)

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	 42 Blue M1 NCS S 5010-B10G
	 11 Black NCS S 8500N
	 53 Green M1 test ral
	 37 Terra Red test ral
	 24 Beige M1 NCS S2005-Y50R
	 42 Blue M1 test ral
LED	2700 K / 3000 K / 3500 K
Control	On/Off / PUSH 1-10V DALI CASAMBI
Electrical connection	Surface / Recessed/ Remote Driver
LED	CRI>90 1281 lm 124.37
Application	Lighting Toolkit
Packaging	1 Box 0.32 in x 0.105 in x 0.08 in Gross weight 0.61 lbs Net weight 0.41 lbs Vol. 0.0026 ft3

Linear High Efficiency -

High energy efficiency and low glare levels UGR<19 for linear light applications

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

Plusminus essentials



6280

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish		37	Terra Red
			test ral
		11	Black
			NCS S 8500N
		53	Green M1
			test ral
		42	Blue M1
			NCS S 5010-B10G
		42	Blue M1
			test ral
		24	Beige M1
			test ral
LED	2700 K / 3000 K / 3500 K		
Control	PUSH 1-10V DALI CASAMBI / On/Off		
Electrical connection	Surface / Recessed/ Remote Driver		
LED	CRI>90 2731 lm 132.57		
Application	Lighting Toolkit		
Packaging	1 Box 0.57 in x 0.105 in x 0.08 in Gross weight 1.29 lbs Net weight 0.89 lbs Vol. 0.0047 ft3		

Efficiency	0
Total Flux	0
Maximum Value	0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA
272 Fernwood Ave. Edison, NJ 08837. USA
T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS
Progrés 4-6. 08850 Gavá
(Barcelona - Spain)

Plusminus essentials



6285

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

Finish	24	Beige M1	Linear High Efficiency - High energy efficiency and low glare levels UGR<19 for linear light applications
	11	Black	
		NCS S 8500N	
	53	Green M1	
		test ral	
	42	Blue M1	
		NCS S 5010-B10G	
	37	Terra Red	
		test ral	
	42	Blue M1	
		test ral	
LED	2700 K / 3000 K / 3500 K		
Control	PUSH 1-10V DALI CASAMBI / PUSH		
Electrical connection	Surface / Recessed/ Remote Driver		
LED	CRI>90 5124 lm 124.07		
Application	Lighting Toolkit		
Packaging	1 Box 1.09 in x 0.105 in x 0.08 in Gross weight 2.31 lbs Net weight 1.51 lbs Vol. 0.0091 ft3		
</			

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA
272 Fernwood Ave. Edison, NJ 08837. USA
T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS
Progrés 4-6. 08850 Gavà
(Barcelona - Spain)




Plusminus essentials

6286

Design By Diez Office

Fusing technology, space, and architecture, Sticks offers a creative lighting toolkit for integrating light elements in an interior space. Pure and graphic, the minimalist aluminium rods transform linear light into a floating sculpture.

Spec sheet

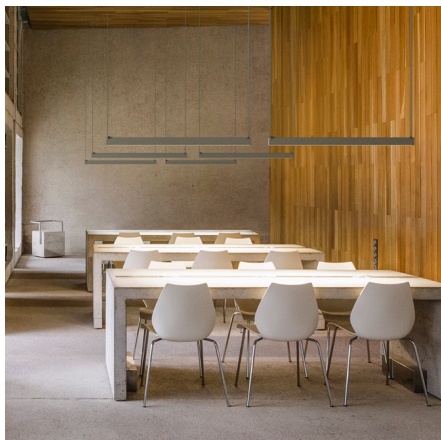

Finish

37 Terra Red
test ral

53 Green M1
test ral

11 Black
NCS S 8500N

42 Blue M1
test ral

42 Blue M1
NCS S 5010-B10G

24 Beige M1
NCS S2005-Y50R

LED

2700 K / 3000 K / 3500 K

Control

On/Off / PUSH 1-10V DALI CASAMBI

Electrical connection Surface / Recessed/ Remote Driver

LED

CRI>90 4611.6 lm 115.29


Application

Lighting Toolkit



Packaging

1 Box
42.91 in x 4.13 in x 3.15 in
Gross weight 5.09 lbs
Net weight 3.33 lbs
Vol. 0.3214 ft3

Lighting effect



Photometric Data

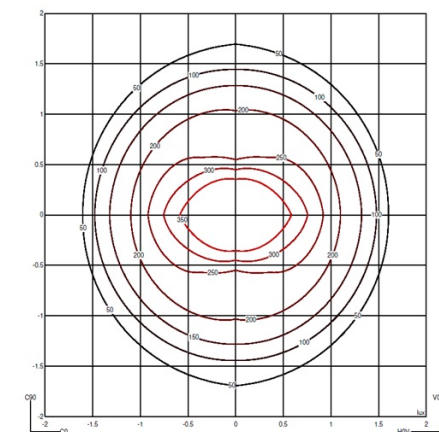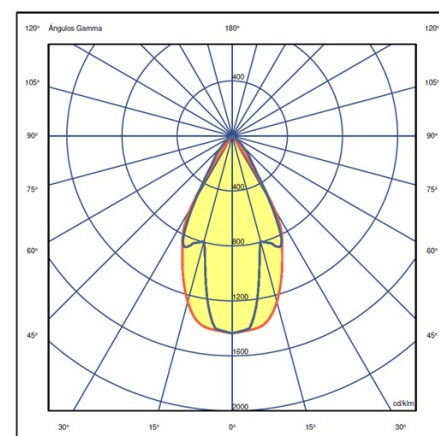

Efficiency 0

Total Flux 0

Maximum Value 0

All of our products come with a two year standard warranty. Check US & Canada Term and Condition sales@vibia.com

VIBIA, INC.

USA & CANADA

272 Fernwood Ave. Edison, NJ 08837. USA

T 732 417 1700 sales@vibia.com www.vibia.com/us/usa

HEADQUARTERS

Progrés 4-6. 08850 Gavà
(Barcelona - Spain)