

FLOS

09.0045.29B9S Anodized Aluminium

Thin LED 404 mm


Designed by FLOS Architectural, 2015



Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	6.8
Source flux (lm)	711
System flux (lm)	621

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

16 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V

FLOS

09.0100.29B9S Anodized Aluminium

Thin LED 1034 mm


Designed by FLOS Architectural, 2015

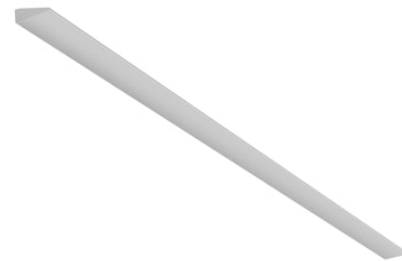

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	20.5
Source flux (lm)	2133
System flux (lm)	1863

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

[Family spec sheet](#)  ZIP

[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  ZIP


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

42 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V

FLOS

09.0101.29B9S Anodized Aluminium

Thin LED 2040 mm


Designed by FLOS Architectural, 2015

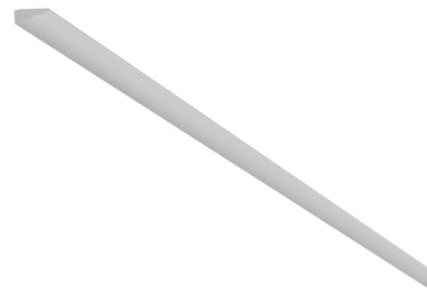

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	41
Source flux (lm)	4266
System flux (lm)	3726

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

84 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V

FLOS

09.0102.29B9S Anodized Aluminium

Thin LED 2541 mm


Designed by FLOS Architectural, 2015

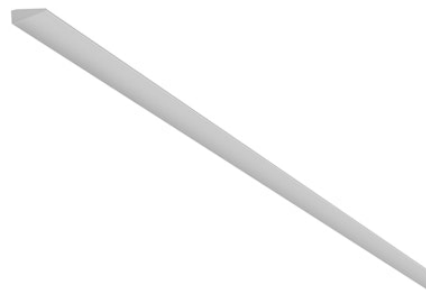

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	47.8
Source flux (lm)	5250
System flux (lm)	4657

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet [ZIP](#)

Mounting instructions [PDF](#)

Photometric Files

LDT / IES [ZIP](#)


Technical Drawings

2D [ZIP](#)

3D [ZIP](#)



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

105 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V

FLOS

09.0103.29B9S Anodized Aluminium

Thin LED 3042 mm


Designed by FLOS Architectural, 2015

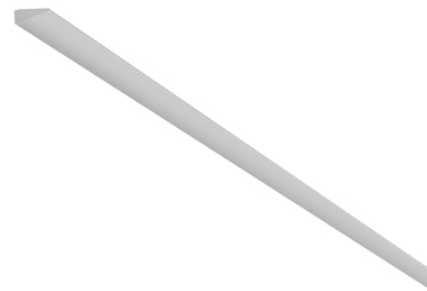

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	61.5
Source flux (lm)	6399
System flux (lm)	5588

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-----------------------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

126 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply


LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V

FLOS

09.0104.29A Anodized Aluminium

Thin LED 1034 mm BLIND


Designed by FLOS Architectural, 2015

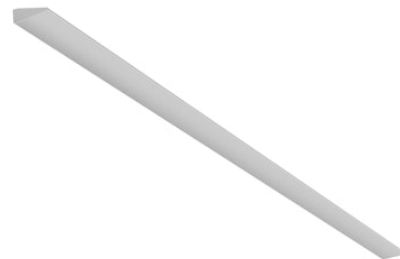

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Number of lamps	1

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Emergency type	No

Notes


To create continuous profile lines.

FLOS

09.0120.29B9S Anodized Aluminium

Thin LED 1201 mm


Designed by FLOS Architectural, 2015

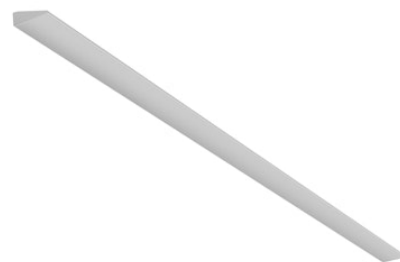

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	23.9
Source flux (lm)	2450
System flux (lm)	2173

Physical

Color	Anodized Aluminium
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	↓ ZIP
Mounting instructions	↓ PDF

Photometric Files


LDT / IES	↓ ZIP
-----------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
Beam angle C0-180 (°)	101
Beam angle C90-270 (°)	43
Extreme cut off	No
UGR _L	<10

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable 1-10V, Dimmable DALI 1
Emergency type	No

Notes

55 LEDs

Accessories & Power Supply



REQUIRED
Power supply

LEDSB60W24V-10V-U01
LED Driver, 24VDC, 60W, 0-10V
Dimming, 120-277V



REQUIRED
Power supply

LEDSB96W24V-10V-U01
LED Driver, 24VDC, 96W, 0-10V
Dimming, 120-277V