

FLOS

F6486009 White


String Light - Sphere head - 12mt cable

Designed by Michael Anastassiades, 2014

21W - 1515lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions  PDF

Mounting instructions  PDF


Mounting instructions  PDF

Photometric Files

LDT / IES  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607041406
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	472.441
Net weight (lb)	2.98
Gross weight (lb)	5.07
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

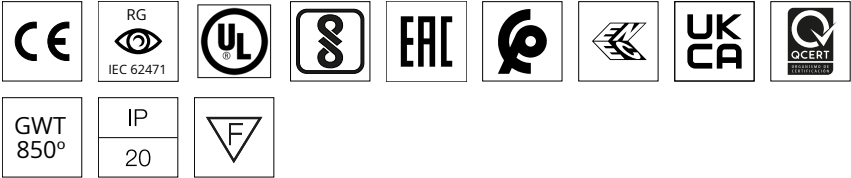

Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

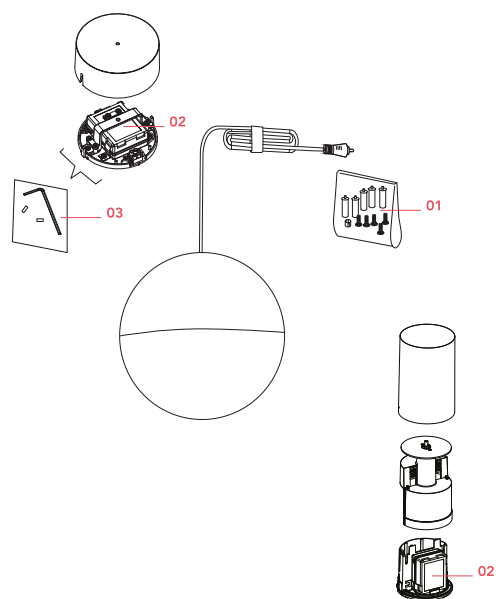

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109
String Light Kit with white hooks
and white cable clamps



RF22934
Power supply unit for led



RFU648200
Kit with allen key and screws for
ceiling rose assembly

FLOS

F6487009 White


String Light - Cone head - 12mt cable

Designed by Michael Anastassiades, 2014

21W - 1035lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions  PDF

Mounting instructions  PDF

Mounting instructions  PDF

Photometric Files

LDT / IES  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607041444
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1035

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	472.441
Net weight (lb)	2.54
Gross weight (lb)	4.63
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

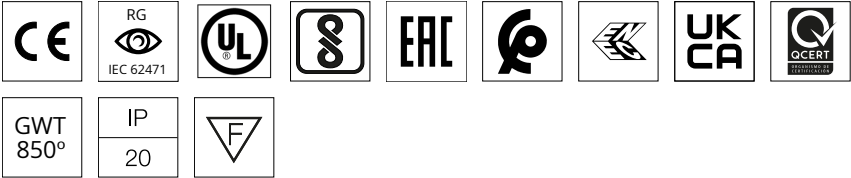

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

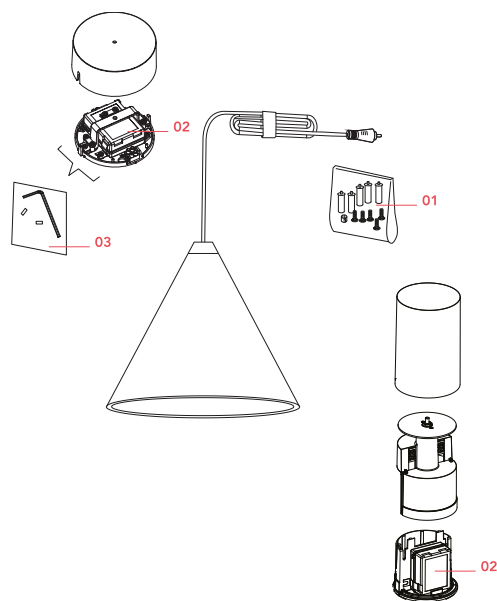

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

String Light - Sphere head - 12mt cable - CASAMBI Ready


Designed by Michael Anastassiades, 2014



21W - 1515lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF


[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607042205
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	472.441
Net weight (lb)	2.98
Gross weight (lb)	4.85
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

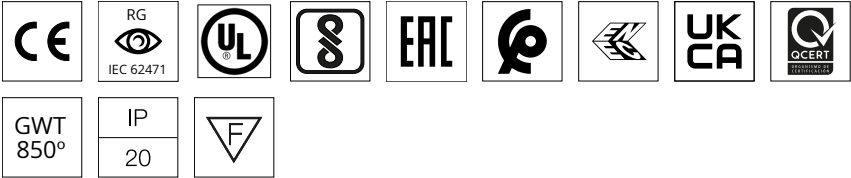

Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimming type	Electronic 48V
Batteries inside	No

Accessories & Power Supply



REQUIRED
F6482009
String Light Canopy in White




REQUIRED
FU648409
String Light White Base



OPTIONAL
F6485009
String Light Cable

Spare Parts

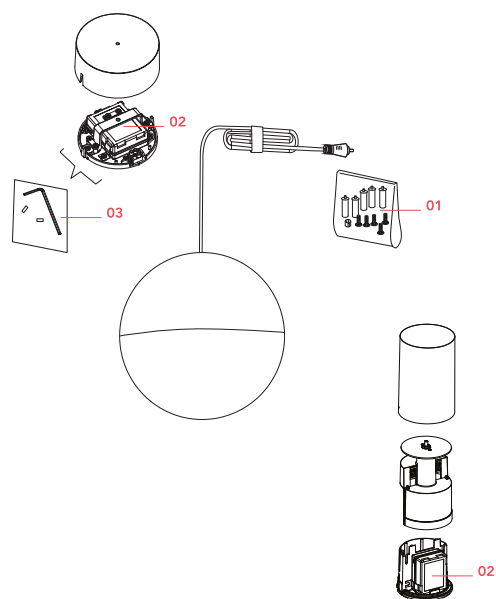

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

FLOS

F6489009 White


String Light - Cone head - 12mt cable - CASAMBI Ready

Designed by Michael Anastassiades, 2014

21W - 1035lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions  PDF

Mounting instructions  PDF


Mounting instructions  PDF

Photometric Files

LDT / IES  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607042212
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1035

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	472.441
Net weight (lb)	2.42
Gross weight (lb)	4.63
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

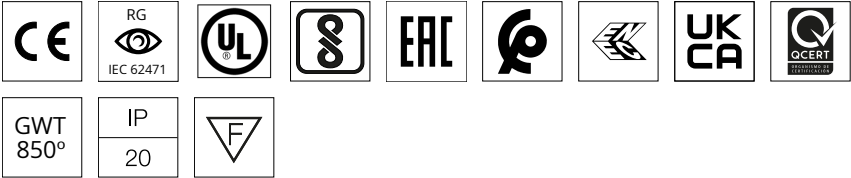

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
F6482009
String Light Canopy in White




REQUIRED
FU648409
String Light White Base



OPTIONAL
F6485009
String Light Cable

Spare Parts

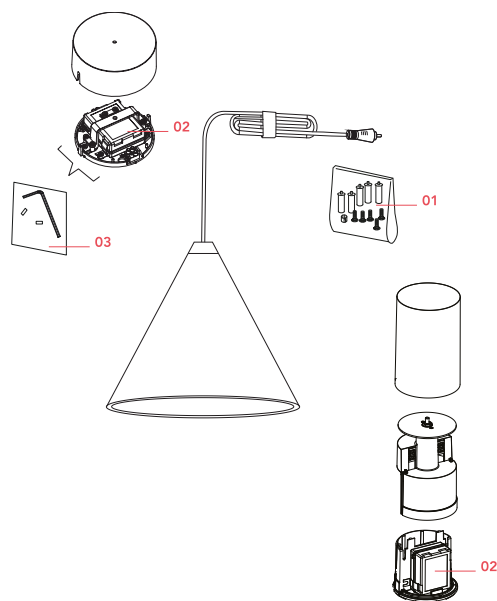

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

FLOS

F6496009 White


String Light - Sphere head - 22mt cable

Designed by Michael Anastassiades, 2014

21W - 1515lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions [↓ PDF](#)

Mounting instructions [↓ PDF](#)


Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ LDT](#)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607041543
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	866.142
Net weight (lb)	3.2
Gross weight (lb)	5.18
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

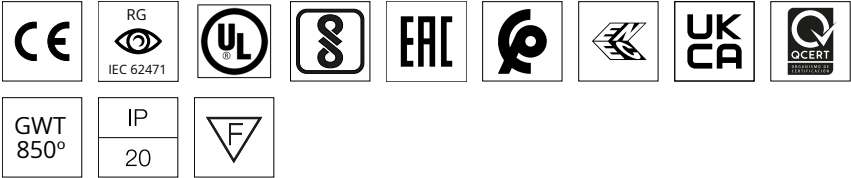

Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

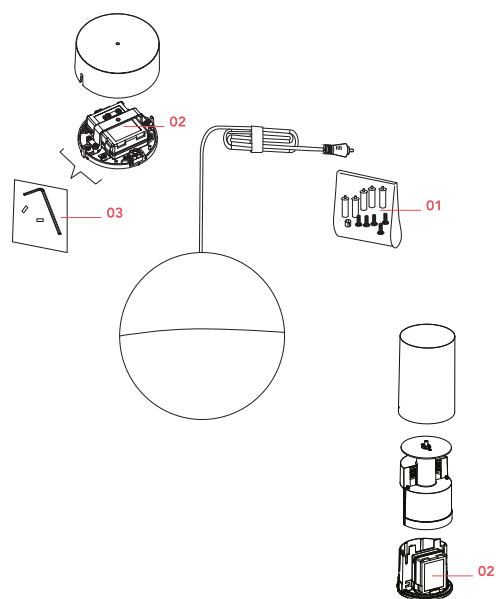

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

FLOS

F6497009 White


String Light - Cone head - 22mt cable

Designed by Michael Anastassiades, 2014

21W - 1035lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions  PDF

Mounting instructions  PDF

Mounting instructions  PDF

Photometric Files

LDT / IES  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607041574
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1035

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	866.142
Net weight (lb)	2.87
Gross weight (lb)	4.96
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

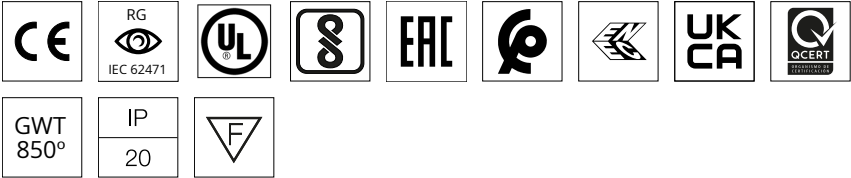

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

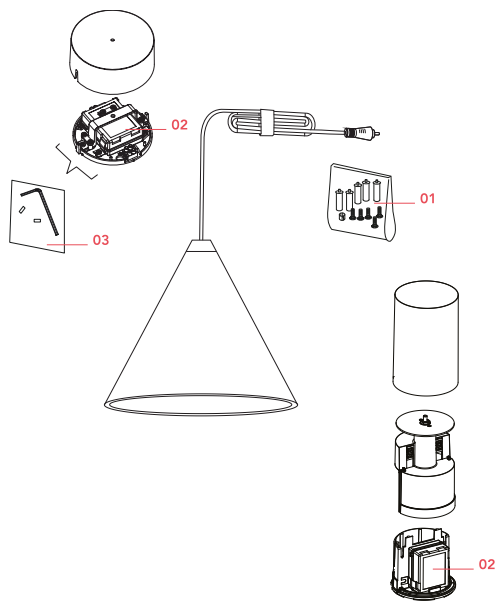

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

String Light - Sphere head - 22mt cable - CASAMBI Ready


Designed by Michael Anastassiades, 2014



21W - 1515lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)  PDF

[Mounting instructions](#)  PDF


[Mounting instructions](#)  PDF

Photometric Files

[LDT / IES](#)  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607042328
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1515

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	866.142
Net weight (lb)	3.31
Gross weight (lb)	5.4
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

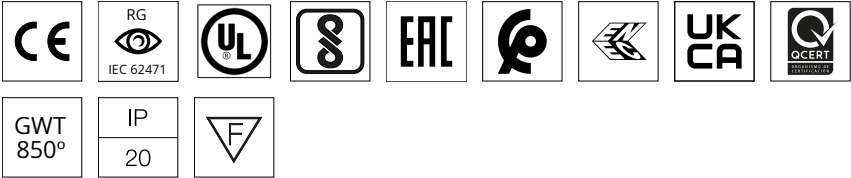

Schematic light drawing



Photometric

Lighting type	Total
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimming type	Electronic 48V
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

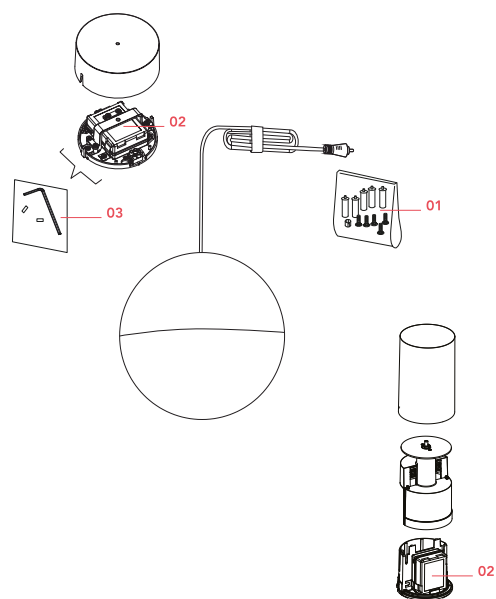

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

FLOS

F6499009 White

String Light - Cone head - 22mt cable - CASAMBI Ready


Designed by Michael Anastassiades, 2014



21W - 1035lm - 2700K

Suspension lamp emitting diffused light. Varnished die-cast aluminium body coated with clear soft-touch varnish and an optical diffuser in opal polycarbonate. The suspension system (12 or 22mt long) includes a Kevlar-reinforced coaxial cable. Available with wall/ceiling connection or floor switch in black polycarbonate. The on/off switch features an electronic, optical and touch-dim mechanism or a Casambi Ready version with touch dimmer included. Must be paired with either the floor switch or ceiling/wall rose (sold separately).

Designed by Michael Anastassiades in 2014, String Light transforms the cable into a defining design element, allowing users to shape the lamp's path around their own environment. It draws quiet, architectural lines through space, inspired by overhead power lines and the festive lights strung across Mediterranean squares. Poetic yet precise, it reflects Anastassiades' pursuit of purity through reduction, offering flexible, atmospheric light for modern living.



Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions  PDF

Mounting instructions  PDF


Mounting instructions  PDF

Photometric Files

LDT / IES  LDT

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional

Main specifications


EAN	8059607042335
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	21
System flux (lm)	1035

Physical

Color	White
Length (in)	7.48
Cord color	White
Cord length (in)	866.142
Net weight (lb)	2.54
Gross weight (lb)	4.3
Package height (in)	11.81
Package width (in)	11.81
Package length (in)	11.81
Package volume (in)	1647.65
IP internal	20

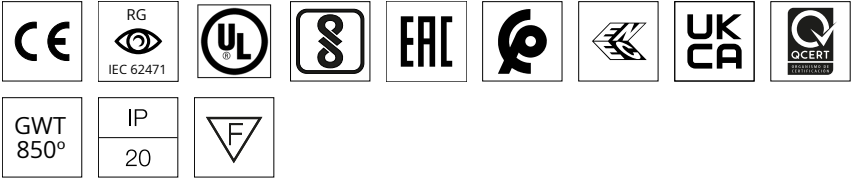

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

Electrical

Insulation class	III
Main voltage (Vac)	48
Forward voltage (V)	48
Driver	Remote excluded
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED

F6482009

String Light Canopy in White



REQUIRED

FU648409

String Light White Base




OPTIONAL

F6485009

String Light Cable

Spare Parts

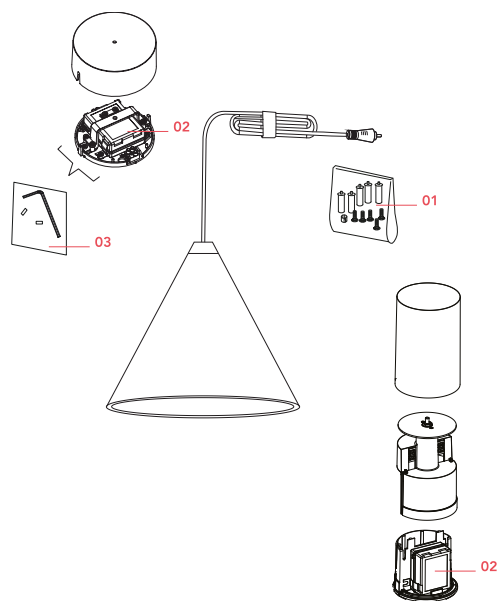

- 01. String Light Kit with white hooks and white cable clamps RF6480109
- 02. Power supply unit for led RF22934
- 03. Kit with allen key and screws for ceiling rose assembly RFU648200



RF6480109

String Light Kit with white hooks
and white cable clamps



RF22934

Power supply unit for led



RFU648200

Kit with allen key and screws for
ceiling rose assembly

String Light Canopy in White

Designed by Michael Anastassiades, 2014



Wallrose. Feed up 3 heads maximum; 3 wayout for cables. Wall or ceiling installation.
Space to wrap 10 meters cable.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607041352
Environments	Indoor dry location
Power (W)	70


Physical

Color	White
Net weight (lb)	0.88
Gross weight (lb)	0.93
Package height (in)	2.36
Package width (in)	5.51
Package length (in)	4.72
Package volume (in)	61.51
IP internal	20


Download

Mounting instructions  PDF

Ecodesign and Energy Labelling



Replaceable control gear by a professional

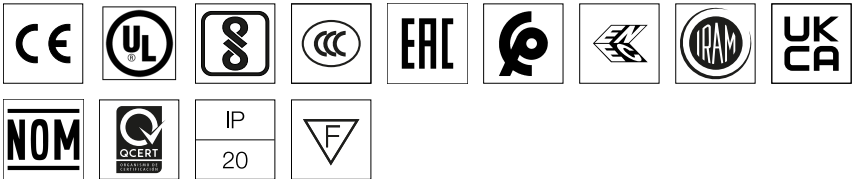

Photometric

Extreme cut off No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Driver	Integrated
Dimming type	Electronic 48V
Batteries inside	No

String Light Canopy in Blue

Designed by Michael Anastassiades, 2014



Wallrose. Feed up 3 heads maximum; 3 wayout for cables. Wall or ceiling installation.
Space to wrap 10 meters cable.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607041369
Environments	Indoor dry location
Power (W)	70


Physical

Color	Blue
Net weight (lb)	0.88
Gross weight (lb)	0.93
Package height (in)	2.36
Package width (in)	5.51
Package length (in)	4.72
Package volume (in)	61.51
IP internal	20


Download

Mounting instructions  PDF

Ecodesign and Energy Labelling



Replaceable control gear by a professional

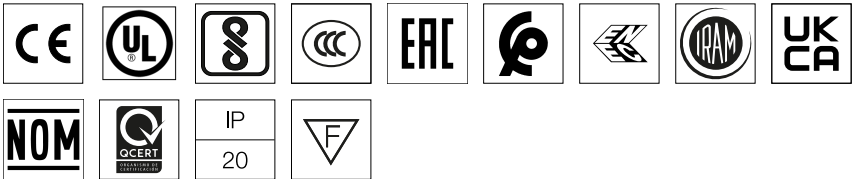

Photometric

Extreme cut off No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Driver	Integrated
Dimming type	Electronic 48V
Batteries inside	No

String Light Rose

Designed by Michael Anastassiades, 2014



Wallrose. Feed up 3 heads maximum; 3 wayout for cables. Wall or ceiling installation.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607022382
Environments	Indoor dry location
Power (W)	70

Physical


Color	Black
Net weight (lb)	0.88
Gross weight (lb)	0.93
Package height (in)	2.36
Package width (in)	5.51
Package length (in)	4.72
Package volume (in)	61.51
IP internal	20

Download


Mounting instructions

 PDF

Ecodesign and Energy Labelling



Replaceable control gear by a professional

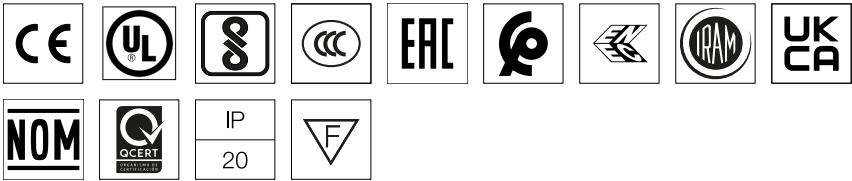

Photometric

Extreme cut off No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	120-277
Driver	Integrated
Dimming type	Electronic 48V
Batteries inside	No

String Light Cable

Designed by Michael Anastassiades, 2014



A white 49.21 feet long cable for String Lights

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Mounting instructions

PDF

Main specifications

EAN	8059607041338
Environments	Indoor dry location

Physical

Color	White
Net weight (lb)	0.66
Gross weight (lb)	0.99
Package height (in)	1.97
Package width (in)	7.48
Package length (in)	12.2
Package volume (in)	179.72



Photometric

Extreme cut off	No
-----------------	----

Electrical


Batteries inside	No
------------------	----

FLOS

 F6485030 Black

String Light Kit cable

Designed by Michael Anastassiades, 2014

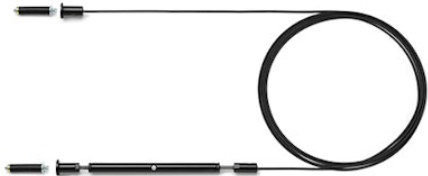

Extra connection cable to compose personal configurations.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607022429
Environments	Indoor dry location

Physical

Color	Black
Net weight (lb)	0.66
Gross weight (lb)	0.99
Package height (in)	1.97
Package width (in)	7.48
Package length (in)	12.2
Package volume (in)	179.72

Download

Mounting instructions



Photometric

Extreme cut off No

Electrical

Batteries inside No