

Light Shadow Adjustable No Trim 2 Spots Optic Wide Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 511lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	511
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files



LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

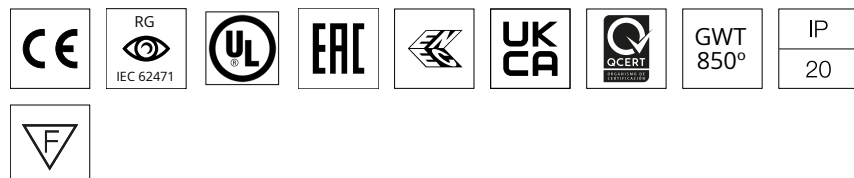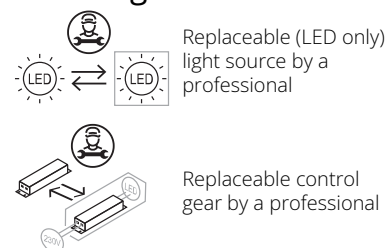

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7064.00A90

Light Shadow 2 Spots Adjustable
Trim-Trimsless, Airtight Housing
for New construction, Integral 0-
10V dimmable driver. CCEA
Chicago Plenum



03.7350.14CUQ Black/White

Light Shadow Adjustable No Trim 2 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 511lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	511
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings


2D




3D



Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0515.00.90
Pre-installation No Trim Frame 2L
Adjustable




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0031
Registration Tray - non electrical,
place holder for non IC new
constructionfor Light Shadow
Fixed 2 Light Trim



03.7358.14C90 Black/White

Light Shadow Adjustable No Trim 4 Spots Optic Wide Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1022lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1022
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

2D




3D



Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7066.00A90

Light Shadow 4 Lights Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Adjustable No Trim 4 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1022lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1022
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0516.00.90
Pre-installation No Trim Frame 4L
Fix Adjustable




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply


SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0038
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow
Adjustable 4 Lights Trim

Light Shadow Adjustable No Trim 8 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2044lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2044
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0517.00.90
Pre-installation No Trim Frame 8L
Fix Adjustable




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01
Splice Box7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Adjustable No Trim 12 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3066lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3066
Efficacy (lm/W)	94

Physical

Color	Black/White
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0518.00.90
Pre-installation No Trim Frame
12L Fix Adjustable




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V




OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Fixed No Trim 2 Spots Optic Wide Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022

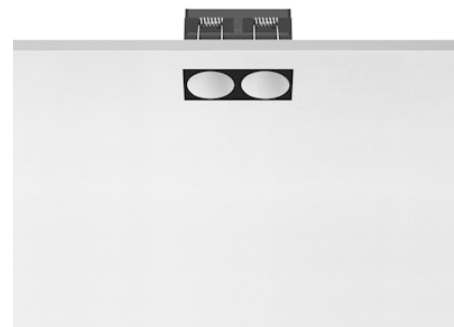

LED - Power LED - 7W - 511lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	511
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

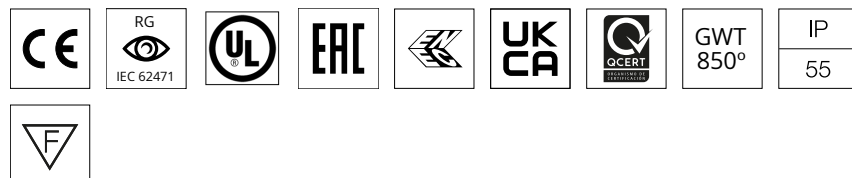

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7063.00A90

Light Shadow 2 Spots Fixed Trim-
Trimsless, Airtight Housing for
New construction, Integral 0-10V
dimmable driver. CCEA Chicago
Plenum

Light Shadow Fixed No Trim 2 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 511lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	511
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files


LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling

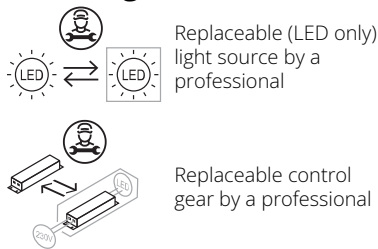

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0510.00.90
Light Shadow 2 Spots 5/8" Frame
Fixed Trimless




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply


SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0032
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow Fix
2 Lights Trimless Fixed 2 Lights
Trimless

Light Shadow Fixed No Trim 4 Spots Optic Wide Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1022lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1022
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

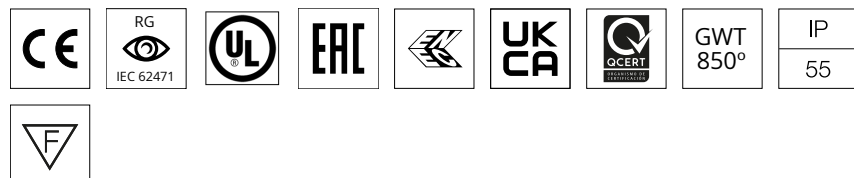

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7065.00A90

Light Shadow 4 Lights Fixed & Wall Washer Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Fixed No Trim 4 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1022lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1022
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings

2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0036
Registration Tray - non electrical,
place holder for non IC new
construction, Light Shadow Fixed
4 Lights Trimless

Light Shadow Fixed No Trim 8 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2044lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2044
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings

2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0512.00.90
Light Shadow 8 Spots 5/8" Frame
Fixed Trimless




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01
Splice Box 7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Fixed No Trim 12 Spots Optic Wide Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3066lm - 2700K - CRI> 90 - Beam° 45

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3066
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	45
Beam angle C90-270 (°)	44
Extreme cut off	No
UGRL	<16

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0513.00.90
Light Shadow 12 Spots 5/8"
Frame Fixed Trimless




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V




OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Fixed No Trim 2 Spots Optic Spot - Airtight IC Rated

Designed by FLOS Architectural, 2022

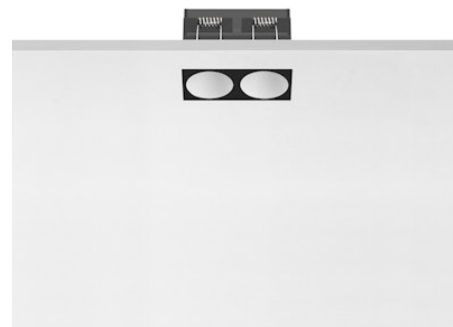

LED - Power LED - 7W - 530lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	530
Efficacy (lm/W)	75

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

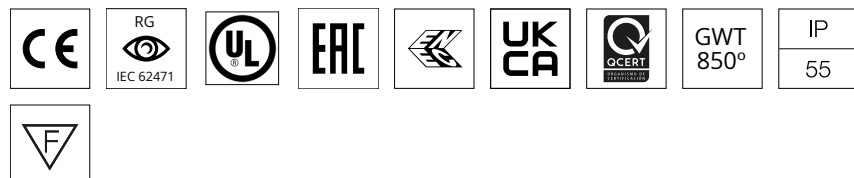

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7063.00A90

Light Shadow 2 Spots Fixed Trim-
Trimsless, Airtight Housing for
New construction, Integral 0-10V
dimmable driver. CCEA Chicago
Plenum

Light Shadow Fixed No Trim 2 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 530lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	530
Efficacy (lm/W)	75

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0510.00.90
Light Shadow 2 Spots 5/8" Frame
Fixed Trimless




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply


SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0032
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow Fix
2 Lights Trimless Fixed 2 Lights
Trimless

Light Shadow Fixed No Trim 4 Spots Optic Spot - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1060lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1060
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

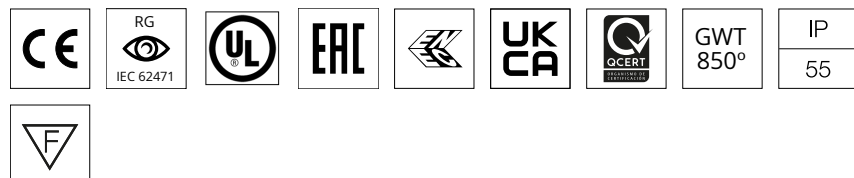

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7065.00A90

Light Shadow 4 Lights Fixed & Wall Washer Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Fixed No Trim 4 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1060lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1060
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.




OPTIONAL
Housing and Hanger Bar

TRAY-0036
Registration Tray - non electrical,
place holder for non IC new
construction, Light Shadow Fixed
4 Lights Trimless

Light Shadow Fixed No Trim 8 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022

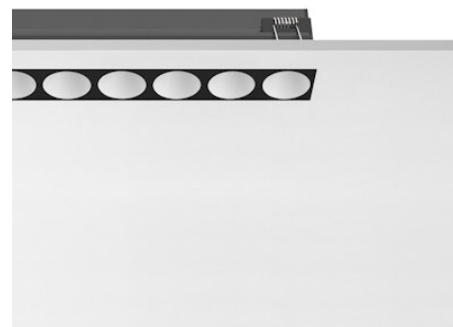

LED - Power LED - 21.6W - 2120lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2120
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

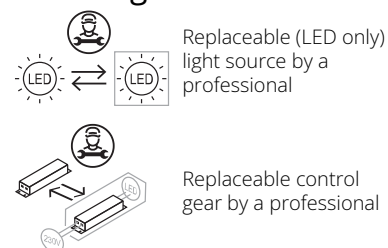

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0512.00.90
Light Shadow 8 Spots 5/8" Frame
Fixed Trimless




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01
Splice Box 7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Fixed No Trim 12 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3180lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3180
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0513.00.90
Light Shadow 12 Spots 5/8"
Frame Fixed Trimless




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Adjustable No Trim 2 Spots Optic Spot - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 530lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	530
Efficacy (lm/W)	75

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files



LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

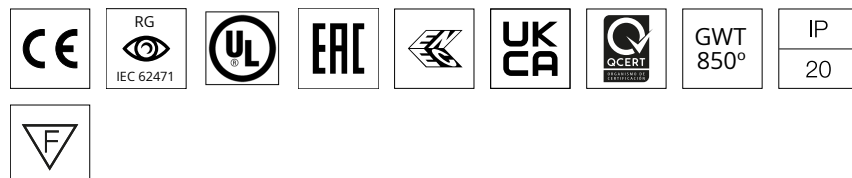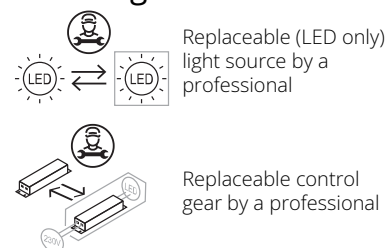

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7064.00A90

Light Shadow 2 Spots Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Adjustable No Trim 2 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 530lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	530
Efficacy (lm/W)	75

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings

2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0515.00.90
Pre-installation No Trim Frame 2L
Adjustable




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0031
Registration Tray - non electrical,
place holder for non IC new
construction for Light Shadow
Fixed 2 Light Trim



03.8924.14C90 Black/White

Light Shadow Adjustable No Trim 4 Spots Optic Spot - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1060lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1060
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

2D




3D



Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7066.00A90

Light Shadow 4 Lights Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Adjustable No Trim 4 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1060lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1060
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files


LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling

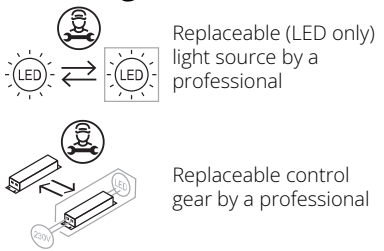

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0516.00.90
Pre-installation No Trim Frame 4L
Fix Adjustable




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0038
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow
Adjustable 4 Lights Trim

Light Shadow Adjustable No Trim 8 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2120lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2120
Efficacy (lm/W)	98

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0517.00.90
Pre-installation No Trim Frame 8L
Fix Adjustable




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01
Splice Box 7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Adjustable No Trim 12 Spots Optic Spot - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3180lm - 2700K - CRI> 90 - Beam° 12

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3180
Efficacy (lm/W)	98

Physical

Color	Black/White
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	12
Beam angle C90-270 (°)	12
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0518.00.90
Pre-installation No Trim Frame
12L Fix Adjustable




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Fixed No Trim 2 Spots Optic Medium - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 510lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	510
Efficacy (lm/W)	72

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

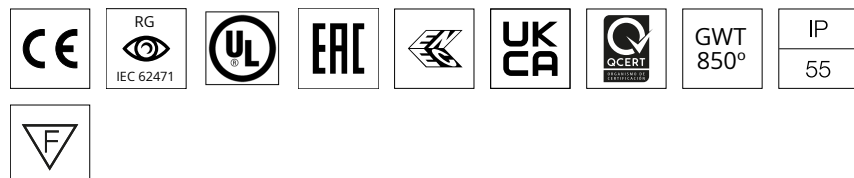

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	8
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7063.00A90

Light Shadow 2 Spots Fixed Trim-
Trimsless, Airtight Housing for
New construction, Integral 0-10V
dimmable driver. CCEA Chicago
Plenum

Light Shadow Fixed No Trim 2 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 510lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	510
Efficacy (lm/W)	72

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	8
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0510.00.90
Light Shadow 2 Spots 5/8" Frame
Fixed Trimless




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply


SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0032
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow Fix
2 Lights Trimless Fixed 2 Lights
Trimless



03.9205.14C90 Black/White

Light Shadow Fixed No Trim 2 Spots Optic Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 514lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	514
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20
IP external	55

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

2D




3D



Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	8
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7063.00A90

Light Shadow 2 Spots Fixed Trim-
Trimsless, Airtight Housing for
New construction, Integral 0-10V
dimmable driver. CCEA Chicago
Plenum

Light Shadow Fixed No Trim 2 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 514lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	514
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	8
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply




REQUIRED
Frame

ACCESSORYTYPE2

08.0510.00.90


Light Shadow 2 Spots 5/8" Frame
Fixed Trimless



REQUIRED
Power supply

SP20W900MA-120-C01


Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP20W900MA-277-C01


Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP20W900MA-ELV-C01

Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90

Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0032

Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow Fix
2 Lights Trimless Fixed 2 Lights
Trimless

Light Shadow Fixed No Trim 4 Spots Optic Medium - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1020lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1020
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

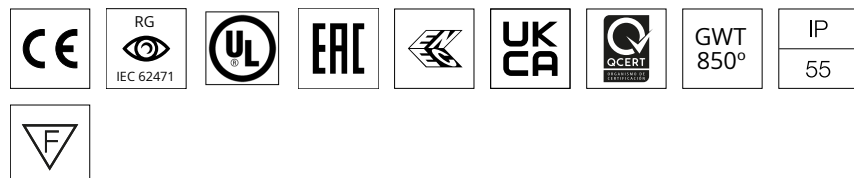

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7065.00A90

Light Shadow 4 Lights Fixed & Wall Washer Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Fixed No Trim 4 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1020lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1020
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings

2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply


SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0036
Registration Tray - non electrical,
place holder for non IC new
construction, Light Shadow Fixed
4 Lights Trimless

Light Shadow Fixed No Trim 4 Spots Optic Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1029lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1029
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Fixed
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20
IP external	55

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional

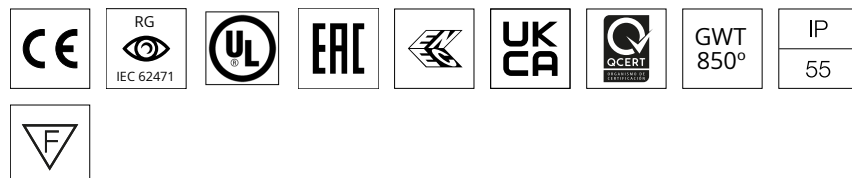

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7065.00A90

Light Shadow 4 Lights Fixed & Wall Washer Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Fixed No Trim 4 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1029lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1029
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0036
Registration Tray - non electrical,
place holder for non IC new
construction, Light Shadow Fixed
4 Lights Trimless



Light Shadow Fixed No Trim 8 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2040lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2040
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files


LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling

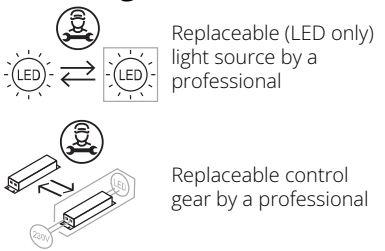

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply




REQUIRED
Frame

ACCESSORYTYPE2

08.0512.00.90


Light Shadow 8 Spots 5/8" Frame
Fixed Trimless



REQUIRED
Power supply

SP25W900MA-120-A01


Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP25W900MA-277-A01


Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01

Splice Box 7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90

Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Fixed No Trim 8 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2057lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2057
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)


Notes

Accessories & Power Supply




REQUIRED
Frame
ACCESSORYTYPE2


08.0512.00.90
Light Shadow 8 Spots 5/8" Frame
Fixed Trimless




REQUIRED
Power supply
SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply
SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply
SP30W900MA-ELV-U01
Splice Box 7"x3.59"x1.25", 900mA
, 30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory
ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Fixed No Trim 12 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3060lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3060
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files


LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling

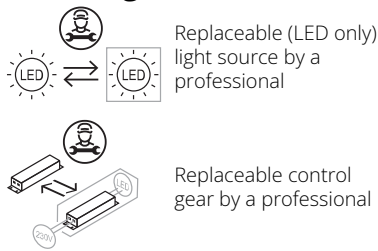

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0513.00.90
Light Shadow 12 Spots 5/8"
Frame Fixed Trimless




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Fixed No Trim 12 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3086lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3086
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Fixed
IP internal	20
IP external	55

Download

Mounting instructions  PDF

Photometric Files


LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling

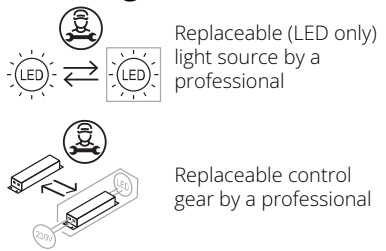

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Frame


ACCESSORYTYPE2

08.0513.00.90
Light Shadow 12 Spots 5/8"
Frame Fixed Trimless




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.

Light Shadow Adjustable No Trim 2 Spots Optic Medium - Airtight IC Rated

Designed by FLOS Architectural, 0



LED - Power LED - 7W - 448lm - 2700K - CRI> 90 - Beam° 22

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
Source flux (lm)	540
System flux (lm)	448

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.56
IP internal	20

Download

Mounting instructions

ZIP

Photometric Files

LDT / IES

ZIP

Technical Drawings

2D


ZIP

3D

ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	22
UGRL	5

Electrical

Insulation class	III
Forward voltage (V)	7
LED current (mA)	900
Driver	Remote

Notes

It requires a pre-installation frame, to be ordered separately.


Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7064.00A90

Light Shadow 2 Spots Adjustable
Trim-Trimsless, Airtight Housing
for New construction, Integral 0-
10V dimmable driver. CCEA
Chicago Plenum

Light Shadow Adjustable No Trim 2 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 510lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	510
Efficacy (lm/W)	72

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0515.00.90
Pre-installation No Trim Frame 2L
Adjustable




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0031
Registration Tray - non electrical,
place holder for non IC new
constructionfor Light Shadow
Fixed 2 Light Trim

Light Shadow Adjustable No Trim 2 Spots Optic Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 514lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	514
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.56
Gross weight (lb)	0.67
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files



LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

Ecodesign and Energy Labelling

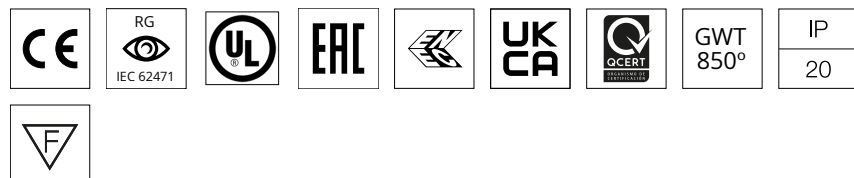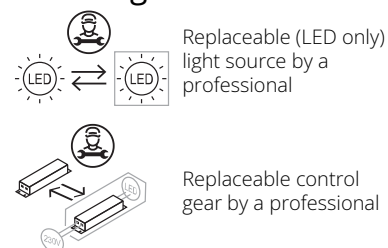

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7064.00A90

Light Shadow 2 Spots Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Adjustable No Trim 2 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 7W - 514lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	7
System power (W)	7
Source flux (lm)	596
System flux (lm)	514
Efficacy (lm/W)	73

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	7
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0515.00.90
Pre-installation No Trim Frame 2L
Adjustable




REQUIRED
Power supply

SP20W900MA-120-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP20W900MA-277-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0031
Registration Tray - non electrical,
place holder for non IC new
constructionfor Light Shadow
Fixed 2 Light Trim



03.9420.14C90 Black/White

Light Shadow Adjustable No Trim 4 Spots Optic Medium - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1020lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1020
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20

Download

Mounting instructions



Photometric Files

LDT / IES



Technical Drawings

2D




3D



Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7066.00A90

Light Shadow 4 Lights Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Adjustable No Trim 4 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1020lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1020
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0516.00.90
Pre-installation No Trim Frame 4L
Fix Adjustable




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply


SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0038
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow
Adjustable 4 Lights Trim

Light Shadow Adjustable No Trim 4 Spots Optic Flood - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1029lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1029
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20

Download

Mounting instructions  PDF

Photometric Files



LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling

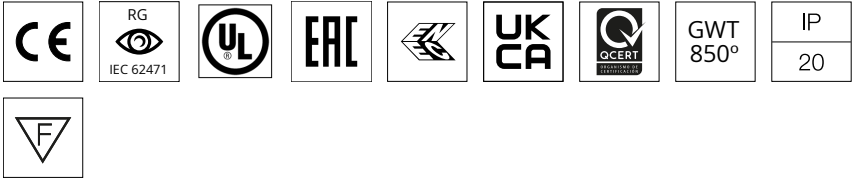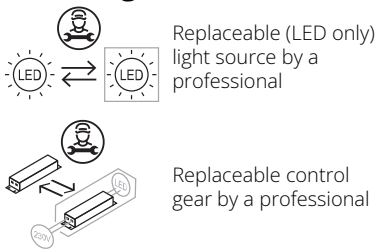

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7066.00A90

Light Shadow 4 Lights Adjustable Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Adjustable No Trim 4 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 1029lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1192
System flux (lm)	1029
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0516.00.90
Pre-installation No Trim Frame 4L
Fix Adjustable




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply


SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0038
Registration Tray - non electrical,
place holder for non IC new
construction, for Light Shadow
Adjustable 4 Lights Trim

Light Shadow Adjustable No Trim 8 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2040lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2040
Efficacy (lm/W)	94

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0517.00.90
Pre-installation No Trim Frame 8L
Fix Adjustable




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01
Splice Box 7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Adjustable No Trim 8 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 21.6W - 2057lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	21.6
System power (W)	21.6
Source flux (lm)	2384
System flux (lm)	2057
Efficacy (lm/W)	95

Physical

Color	Black/White
Trim	No
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	24
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0517.00.90
Pre-installation No Trim Frame 8L
Fix Adjustable




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



REQUIRED
Power supply

SP30W900MA-ELV-U01
Splice Box 7"x3.59"x1.25", 900mA ,
30W, ELV Dimmable, Thermal
120V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Adjustable No Trim 12 Spots Optic Medium - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3060lm - 2700K - CRI> 90 - Beam° 23

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3060
Efficacy (lm/W)	94

Physical

Color	Black/White
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	23
Beam angle C90-270 (°)	22
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0518.00.90
Pre-installation No Trim Frame
12L Fix Adjustable




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Adjustable No Trim 12 Spots Optic Flood - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 32.4W - 3086lm - 2700K - CRI> 90 - Beam° 29

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	32.4
System power (W)	32.4
Source flux (lm)	3576
System flux (lm)	3086
Efficacy (lm/W)	95

Physical

Color	Black/White
Orientation	Adjustable
Longitudinal tilting (°)	30
IP internal	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	29
Beam angle C90-270 (°)	28
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	36
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0518.00.90
Pre-installation No Trim Frame
12L Fix Adjustable




REQUIRED
Power supply

SP40W900MA-120-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply

SP40W900MA-277-A01
Splice Box7"x3.59"x1.25", 900mA ,
40W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0059.90
Accessory for mounting of No
Trim Adjustable continuous line.

Light Shadow Wall Washer No Trim 4 Spots - Airtight IC Rated

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 872lm - 3000K - CRI> 90 - Beam° 24

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1280
System flux (lm)	872
Efficacy (lm/W)	80

Physical

Color	Black
Trim	Yes
Orientation	Fixed
Net weight (lb)	0.75
Gross weight (lb)	1.02
IP internal	20
IP external	20

Download

Mounting instructions  PDF

Photometric Files

LDT / IES  ZIP

Technical Drawings


2D  ZIP

3D  ZIP

Ecodesign and Energy Labelling




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



Schematic light drawing



Photometric

Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	24
Beam angle C90-270 (°)	43
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Remote
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Accessories & Power Supply



REQUIRED
Housing and Hanger Bar

08.1201.00.UL

Bar Hanger Set , Male-Female (set of 2)



REQUIRED
Housing and Hanger Bar

08.7065.00A90

Light Shadow 4 Lights Fixed & Wall Washer Trim-Trimsless, Airtight Housing for New construction, Integral 0-10V dimmable driver. CCEA Chicago Plenum

Light Shadow Wall Washer No Trim 4 Spots - Non IC

Designed by FLOS Architectural, 2022



LED - Power LED - 10.8W - 872lm - 3000K - CRI> 90 - Beam° 24

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	10.8
System power (W)	10.8
Source flux (lm)	1280
System flux (lm)	872
Efficacy (lm/W)	80

Physical

Color	Black
Trim	Yes
Orientation	Fixed
IP internal	20
IP external	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files


LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)


Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by a professional



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B20 >50.000h (Tc=85°C)
Beam angle C0-180 (°)	24
Beam angle C90-270 (°)	43
Extreme cut off	No
UGRL	<10

Electrical

Forward voltage (V)	12
LED current (mA)	900
Driver	Integral - Splice Box
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes


Accessories & Power Supply



REQUIRED
Accessory


ACCESSORYTYPE2

08.0511.00.90
Pre-installation No Trim Frame 4L
Fix




REQUIRED
Power supply

SP20W900MA-ELV-C01
Splice Box 9"x2.22"x1.25", 900mA
, 20W, ELV Dimmable, Thermal
120V




REQUIRED
Power supply

SP25W900MA-120-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
120V



REQUIRED
Power supply


SP25W900MA-277-A01
Splice Box 9"x3.59"x1.25", 900mA
, 25W, 0-10V Dimmable, Thermal
277V



OPTIONAL
Accessory

ACCESSORYTYPE2

08.0052.90
Accessory for mounting of No
Trim Fix continuous line.



OPTIONAL
Housing and Hanger Bar

TRAY-0036
Registration Tray - non electrical,
place holder for non IC new
construction, Light Shadow Fixed
4 Lights Trimless