

Reinforced Profile 1000mm Dimmable

Designed by FLOS Architectural, 2024




Recessed

Interior electromechanical recessed profile (24Vdc) from 1 to 3m long for wall or ceiling installation, with screw and plug fixation supplied with the profile. Request power connectors, intermediate connectors, and covers separately. Unit joints available in L, T, and X shapes in the same plane. Also includes a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

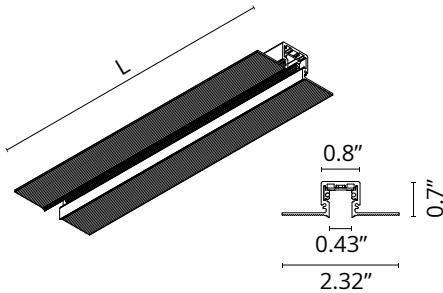

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Trim	No
Field cuttable	Yes
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF




Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
Power supply

Electrical

08.0613.14A
Dimmable control box 1-10V,
24/48V. For remote installation.



REQUIRED
Connector

Electrical

06.0456.14
Live end Feed



REQUIRED
Corner

Electrical

06.0460.14.90
X Connector



REQUIRED
Component

Mounting

06.0461.14
Blind End



REQUIRED
Corner

Electrical

06.0459.14.90
T Connector



OPTIONAL
Corner

Electrical

06.0458.14
Inner Corner



OPTIONAL
Corner

Electrical

06.0457.14
90° Corner



OPTIONAL
Connector

Electrical

06.2608.14
Straight Connector

Reinforced Profile 2000mm Dimmable

Designed by FLOS Architectural, 2024




Recessed

Interior electromechanical recessed profile (24Vdc) from 1 to 3m long for wall or ceiling installation, with screw and plug fixation supplied with the profile. Request power connectors, intermediate connectors, and covers separately. Unit joints available in L, T, and X shapes in the same plane. Also includes a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

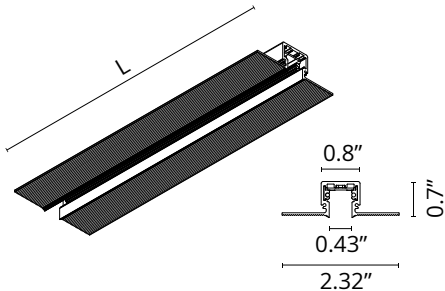

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Trim	No
Field cuttable	Yes
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF




Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
Power supply

Electrical

08.0613.14A
Dimmable control box 1-10V,
24/48V. For remote installation.



REQUIRED
Corner

Electrical

06.0460.14.90
X Connector



REQUIRED
Connector

Electrical

06.0456.14
Live end Feed



REQUIRED
Component

Mounting

06.0461.14
Blind End



REQUIRED
Corner

Electrical

06.0459.14.90
T Connector



OPTIONAL
Corner

Electrical

06.0458.14
Inner Corner



OPTIONAL
Corner

Electrical

06.0457.14
90° Corner



OPTIONAL
Connector

Electrical

06.2608.14
Straight Connector

Reinforced Profile 3000mm Dimmable

Designed by FLOS Architectural, 2024




Recessed

Interior electromechanical recessed profile (24Vdc) from 1 to 3m long for wall or ceiling installation, with screw and plug fixation supplied with the profile. Request power connectors, intermediate connectors, and covers separately. Unit joints available in L, T, and X shapes in the same plane. Also includes a linear electric connector for joining two track sections in the same plane and a 90° electromechanical connector for joining profile sections in different planes (interior wall-wall, ceiling-wall).

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

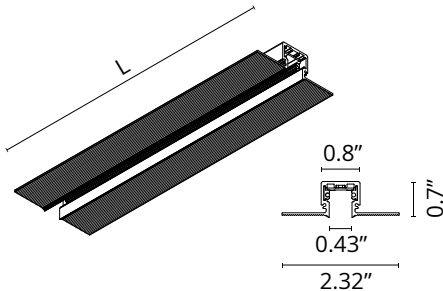

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Trim	No
Field cuttable	Yes
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF




Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
Power supply

Electrical

08.0613.14A
Dimmable control box 1-10V,
24/48V. For remote installation.



REQUIRED
Corner

Electrical

06.0460.14.90
X Connector



REQUIRED
Connector

Electrical

06.0456.14
Live end Feed



REQUIRED
Component

Mounting

06.0461.14
Blind End



REQUIRED
Corner

Electrical

06.0459.14.90
T Connector



OPTIONAL
Corner

Electrical

06.0458.14
Inner Corner



OPTIONAL
Corner

Electrical

06.0457.14
90° Corner



OPTIONAL
Connector

Electrical

06.2608.14
Straight Connector

Live end Feed

Designed by FLOS Architectural, 2024



Track

Power supply unit for the remote power source unit. Includes preinstalled power cable and is compatible with both on/off and dimmable versions.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Field cuttable	No
IP internal	20



Download

- Family spec sheet
- Mounting instructions
- ZIP
- PDF




Photometric

Extreme cut off No

Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Accessories & Power Supply



REQUIRED
Power supply

Electrical

08.0613.14A

Dimmable control box 1-10V,
24/48V. For remote installation.

FLOS

06.0458.14 Black

Inner Corner NEW

Designed by FLOS Architectural, 2024



Track

Ceiling/wall - wall/wall inner corner with no feed entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Field cuttable	No
IP internal	20



Download

- Family spec sheet [ZIP](#)
- Mounting instructions [PDF](#)



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

FLOS

06.0459.14.90 Black

T Connector NEW

Designed by FLOS Architectural, 2024



Track

T-shaped connector with no feed entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Field cuttable	No
IP internal	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

FLOS

06.0460.14.90

Black

X Connector

NEW

Designed by FLOS Architectural, 2024



Track

Cross-shaped connector with no feed entry.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Track
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Field cuttable	No
IP internal	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Driver	Remote
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

FLOS

06.0461.14 Black

Blind End NEW

Designed by FLOS Architectural, 2024



Recessed

To be ordered separately. 2 unit kit.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Light sources included	No

Physical

Color	Black
Field cuttable	No
IP internal	20



Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 2, Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No