Fris
Joan Gaspar

marset

Drawing thin beams of light in a space with each one of them pointing in any direction. Through the transparent glass we see the lamp's interior, which consists of two profiles: the light source and the parabola. Fris offers a very versatile and functional design for precise lighting of any type of project. An ingenious system that boldly tackles a previously unresolved issue: to have a set of lamps where each one directs the light individually.

Fris 80

Code	Finish	Electrical Rating	Luminaire	CCT	CRI
A718-055-16-27K	● Black	24Vdc 13.7W	1165lm	2700K	CRI90
A718-055-16-30K	● Black	24Vdc 13.7W	1165lm	3000K	CRI90
A718-055-18-27K	● Bronze	24Vdc 13.7W	1165lm	2700K	CRI90
A718-055-18-30K	● Bronze	24Vdc 13.7W	1165lm	3000K	CRI90



Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Based on specified driver/canopy

Materials
Structure: Aluminum
Diffuser: Glass

Wire length: 9.8 ft
Wire installation: Hardwired / Recessed
Color cord: Black

Suitable for Damp locations

Product notes: 24V remote power supply and hooks (see the accesories section) to be ordered separately.
LED included

Dimmable

Fris 155

Code	Finish	Electrical Rating	Luminaire	CCT	CRI
A718-056-16-27K	● Black	24Vdc 29.4W	2258lm	2700K	CRI90
A718-056-16-30K	● Black	24Vdc 29.4W	2258lm	3000K	CRI90
A718-056-18-27K	● Bronze	24Vdc 29.4W	2258lm	2700K	CRI90
A718-056-18-30K	● Bronze	24Vdc 29.4W	2258lm	3000K	CRI90



Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Based on specified driver/canopy

Materials
Structure: Aluminum
Diffuser: Glass

Wire length: 9.8 ft
Wire installation: Hardwired / Recessed
Color cord: Black

Suitable for Damp locations

Product notes: 24V remote power supply and hooks (see the accesories section) to be ordered separately.
LED included

Dimmable

Fris 215

Code	Finish	Electrical Rating	Luminaire	CCT	CRI
A718-057-16-27K	● Black	24Vdc 42W	3132lm	2700K	CRI90
A718-057-16-30K	● Black	24Vdc 42W	3132lm	3000K	CRI90
A718-057-18-27K	● Bronze	24Vdc 42W	3132lm	2700K	CRI90
A718-057-18-30K	● Bronze	24Vdc 42W	3132lm	3000K	CRI90

Dimmable: Yes
Integrated dimmer: No
Dimming protocols: Based on specified driver/canopy

Materials
Structure: Aluminum
Diffuser: Glass

Wire length: 9.8 ft
Wire installation: Hardwired / Recessed
Color cord: Black

Suitable for Damp locations

Product notes: 24V remote power supply and hooks (see the accesories section) to be ordered separately.
LED included

Dimmable

Fris

- Diffuse decorative light.
- LED 2700K and 3000K CRI90
- 24V product, can be connected to each other.
  Max. 5 Fris 80
  Max. 3 Fris 155
  Max. 2 Fris 215
- Power supply not included, order separately.

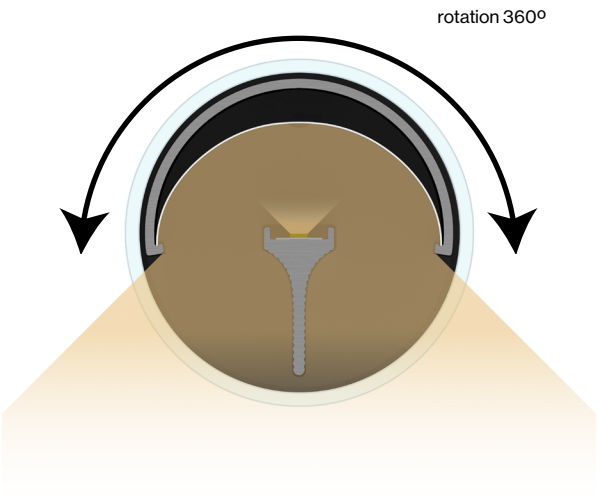

Accessories Fris

Remote LED Driver (ELV)

Code
A968-333

Description: Remote driver for standard junction box, ELV dimming.

Input: 120VAC 50/60Hz
Output: CV 24V DC 60W max.
Dimming Protocols: ELV / TRIAC
Suitable fot damp locations



Rectangular Canopy 60W 0-10V

Code	Finish
A666-213-16	● Black

Description: Canopy for single or dual installations, two connection points, 0-10V only

Input: 120-277 VAC 50/60 Hz
Output: CV 24V DC 60W max.
Dimming Protocols: 0-10V
Suitable for damp locations



Rectangular Canopy 60W ELV/0-10V

Code	Finish
A666-254-16	● Black

Description: Canopy for single or dual installations, two connection points, ELV/0-10V

Input: 120-277 VAC 50/60 Hz
Output: CV 24V DC 60W max.
Dimming Protocols: ELV / TRIAC / 0-10V
Suitable for damp locations



Rectangular Canopy 96W ELV/0-10V

Code	Finish
A666-255-16	● Black

Description: Canopy for single or dual installations, two connection points, ELV/0-10V

Input: 120-277 VAC 50/60 Hz
Output: CV 24V DC 90W max.
Dimming Protocols: ELV / TRIAC / 0-10V
Suitable for damp locations



Circular Canopy 60W ELV/0-10V

Code	Finish
A666-257-16	● Black

Description: Canopy for single installation, one connection point, ELV/0-10V

Input: 120-277 VAC 50/60 Hz
Output: CV 24V DC 60W max.
Dimming Protocols: ELV / TRIAC / 0-10V
Suitable for damp locations



Outlet Box Cover Plate With Hanging Support

Code	Finish
A666-258-39	● Black

Description: Circular cover plate for 4” octagonal junction box, with support for hanging wire



Outlet Box Cover Plate

Code	Finish
A666-219-16	● Black

Description: Circular cover plate for 4” octagonal junction box



Hooks, unions and supports

● Black

Product notes: Hooks, unions and supports to make compositions.

Hook 47 x1 / A718-065-39



Double hook 96 x1 / A718-066-39



Double hook 71 x1 / A718-067-39



Double hook 146 x1 / A718-068-39



Union 30 / A718-069-39

Union 50 / A718-070-39



Union 100 / A718-071-39

Support 13x2 / A718-072-39

Hooks, unions and supports

Hook 47 x2 / A718-061-39



Double hook 96 x2 / A718-062-39



Double hook 71 x2 / A718-063-39



Double hook 146 x2 / A718-064-39



Support Fris A 16 x2 / A718-041-39

Support Fris A 37 x2 / A718-040-39

Side cover / A718-033-39

● Black

Product notes: Hooks, unions and supports to make compositions.

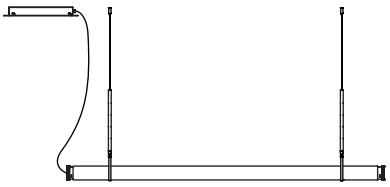

1 unit Fris 155
1 unit Hook 50 x2
1 unit Canopy

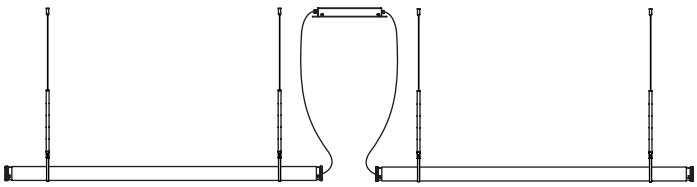

2 unit Fris 155
2 unit Hook 50 x2
1 unit Canopy

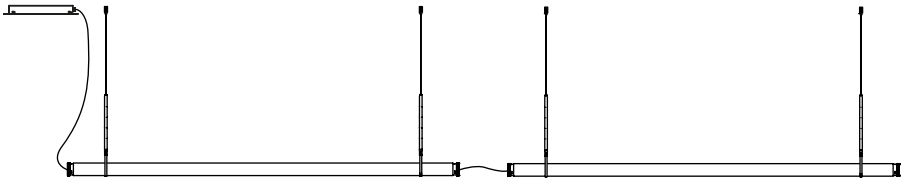

2 units Fris 215
2 units Hook 50 x2
1 unit Canopy
1 unit Side cover

Product notes: Max. 3x Fris 155
Max. 2x Fris 215
Max. 5x Fris 80

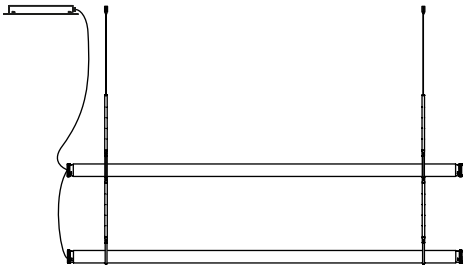

2 units Fris 215
2 units Double hook 96
1 unit Canopy

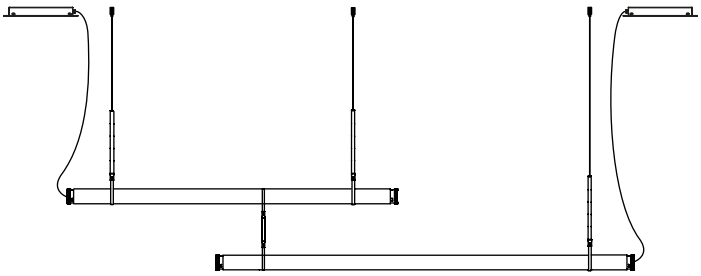

1 unit Fris 155
1 unit Fris 215
1 unit Hook 50 x2
1 unit Hook 50 x1
1 unit Union 30
1 unit Canopy Fris 155
1 unit Canopy Fris 215

marsetusa@marset.com
www.marset.com

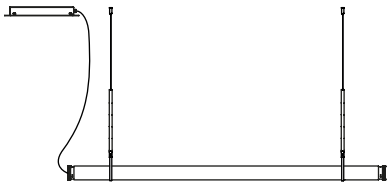

1 unit Fris Pro 155
1 unit Hook 50 x2

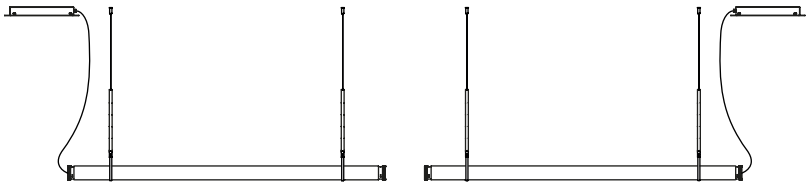

2 units Fris Pro 155
2 units Hook 50 x2

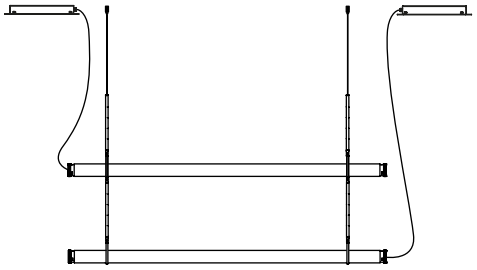

2uds. Fris Pro 155
2ud. Hook doble 96

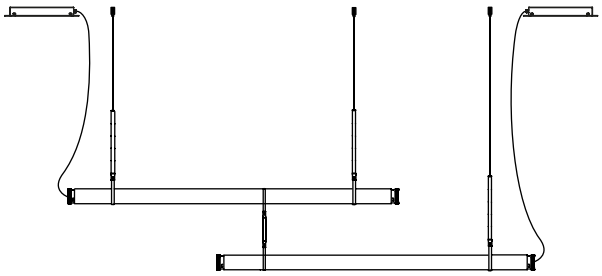

2ud. Fris Pro 155
1ud. Hook 50 x2
1ud. Hook 50 x1
1ud. Union 30

⚠ **WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

marsetusa@marset.com
www.marset.com

Download

Photometric data file (LDT or IES)
2D, 3D, Photometric Data
Assembly instructions

Fris Pro

Joan Gaspar

marset

Drawing thin beams of light in a space with each one of them pointing in any direction. Through the transparent glass we see the lamp's interior, which consists of two profiles: the light source and the aluminum structure. Fris offers a very versatile and functional design for precise lighting of any type of project. An ingenious system that boldly tackles a previously unresolved issue: to have a set of lamps where each one directs the light individually.

Fris Pro 155

Code	Finish	Electrical Rating	Luminaire	CCT	CRI
A718-054-16-30K	● Black	40W 1050mA	3991lm	3000K	CRI90
A718-054-16-40K	● Black	40W 1050mA	3991lm	4000K	CRI90
A718-054-18-30K	● Bronze	40W 1050mA	3991lm	3000K	CRI90
A718-054-18-40K	● Bronze	40W 1050mA	3991lm	4000K	CRI90



Dimmable: Yes
Integrated dimmer: No
Dimming protocols: See canopy A666-256-16

Electrical Rating: 1050mA constant current 41.5W

LED beam angle: 55º

Materials
Structure: Aluminum
Diffuser: Glass

Wire length: 9.8 ft
Wire installation: Hardwired / Recessed
Color cord: Black

Product notes: 1050mA power supply and hooks (see the accesories section) to be ordered separately.
Tunable White (27K - 40K) available upon request.
4000K available upon request.
LED opening degrees: 30º y 65º available upon request.
LED included

Suitable for Damp locations

Dimmable

Accessories Fris Pro

Rectangular Canopy 50W ELV/0-10V

Code	Finish
A666-256-16	● Black

Description: Canopy for single or dual installations, one connection point, TRIAC/ELV/0-10V

Input: 120-277VAC 50/60Hz (ELV / TRIAC only 120VAC)
Output: CC 1050mA 44W max. (24VDC-42VDC)
Dimming Protocols: ELV / TRIAC / 0-10
Suitable for damp locations



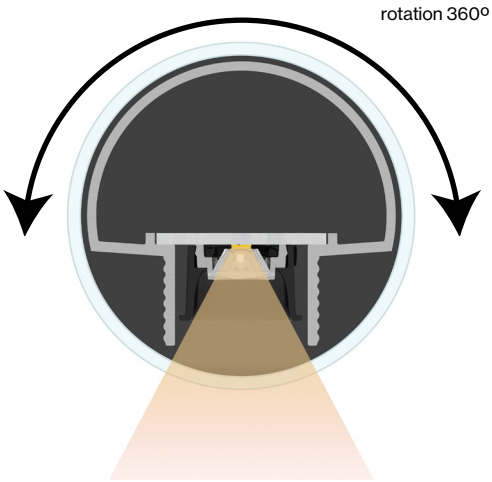

Fris Pro

- For tasks requiring higher luminance and increased glare control.
- LED 3000K CRI90 (4000K available upon request).
- Power supply not included, ordered separately.
They cannot be connected to each other. Dimmable Dali or Casambi.
- LED beam angle: 55º
(30º and 65º available upon request)
- Tunable White 2700K 4000K version (available upon request).

Hooks, unions and supports

Hook 47 x1 / A718-065-39



Double hook 96 x1 / A718-066-39



Double hook 71 x1 / A718-067-39



Double hook 146 x1 / A718-068-39



Union 30 / A718-069-39

Union 50 / A718-070-39



Union 100 / A718-071-39

Support 13x2 / A718-072-39

● Black

Product notes: Hooks, unions and supports to make compositions.

Hooks, unions and supports

Hook 47 x2 / A718-061-39



Double hook 96 x2 / A718-062-39



Double hook 71 x2 / A718-063-39



Double hook 146 x2 / A718-064-39



Support Fris A 37 x2 / A718-041-39



Support Fris A 16 x2 / A718-040-39

● Black

Product notes: Hooks, unions and supports to make compositions.

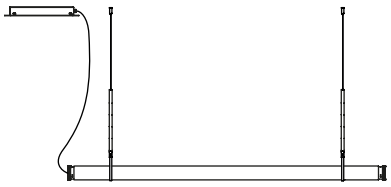

1 unit. Fris Pro 155
1 unit. Hook 50 x2
1 unit. canopy

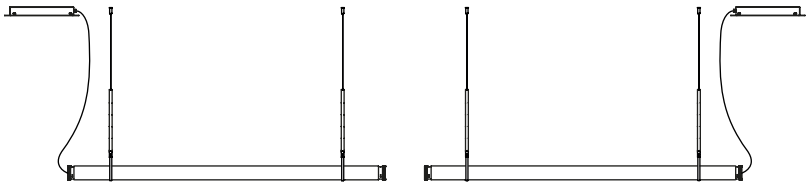

2 units. Fris Pro 155
2 units. Hook 50 x2
2 units. canopy

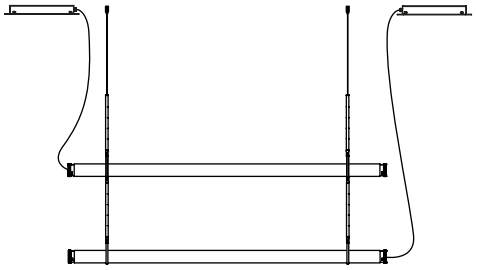

2 units. Fris Pro 155
2 units. Hook doble 96
2 units. canopy

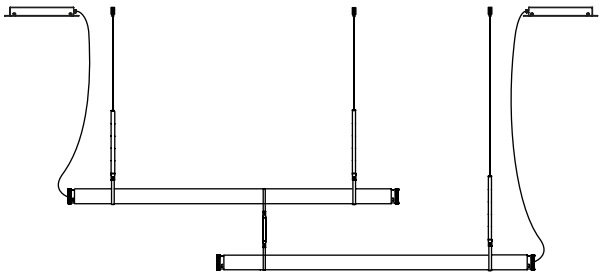

2 units. Fris Pro 155
1 units. Hook 50 x2
1 units. Hook 50 x1
1 units. Union 30
2 units. canopy

⚠ **WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

marsetusa@marset.com
www.marset.com

Download

Photometric data file (LDT or IES)
2D, 3D, Photometric Data
Assembly instructions