

FLOS

 FU639217 Almond


Skynest Suspension

Designed by Marcel Wanders, 2022

78W - 1944lm - 2700K - CRI> 90

Suspension lamp emitting diffused light. Dome structure in polyester mesh made from recycled and recyclable fabric with luminous and dark elements powered by micro-connectors. Equipped with integrated balancing system and aluminium ring for snap-fit assembly. Glue-free construction for disassembly and recycling. Painted plastic ceiling rose with integrated electronics for 0-10V/1-10V, DALI and PUSH dimming systems.

Designed by Marcel Wanders, Skynest draws on the tradition of handcrafted weaving to replace the typical lampshade with something unexpected and expressive. The result is a lamp that feels both familiar and futuristic, created from textile-covered LED strips woven into a glowing network with the basket itself as the source of light. Made without glue and using recycled materials, it reflects a commitment to longevity and circular design. Its name evokes a floating nest of light suspended in the air, a poetic image for a piece that blurs the line between industry, technology and craft.

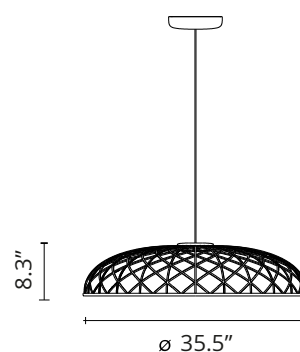

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

Mounting instructions

 PDF

Photometric Files

LDT / IES

 ZIP

Technical Drawings

2D

 ZIP

3D

 ZIP

Main specifications


EAN	8059607076446
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	78
System power (W)	78
System flux (lm)	1944

Physical


Color	Almond
Length (in)	35.59
Cord length (in)	106.299
Canopy height (in)	2.008
Net weight (lb)	8.38
Gross weight (lb)	29.54
Package height (in)	9.84
Package width (in)	39.37
Package length (in)	39.37
Package volume (in)	15256
IP internal	20

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only) light source by an end-user



Replaceable control gear by a professional



Schematic light drawing



Beam Angle: 112°

h(m)	E(lx)	D(m)
1	649	2.98
2	162	5.96
3	72	8.95
4	41	11.93
5	26	14.91

Luminous flux luminaire
2655 lm


Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)

Spare Parts

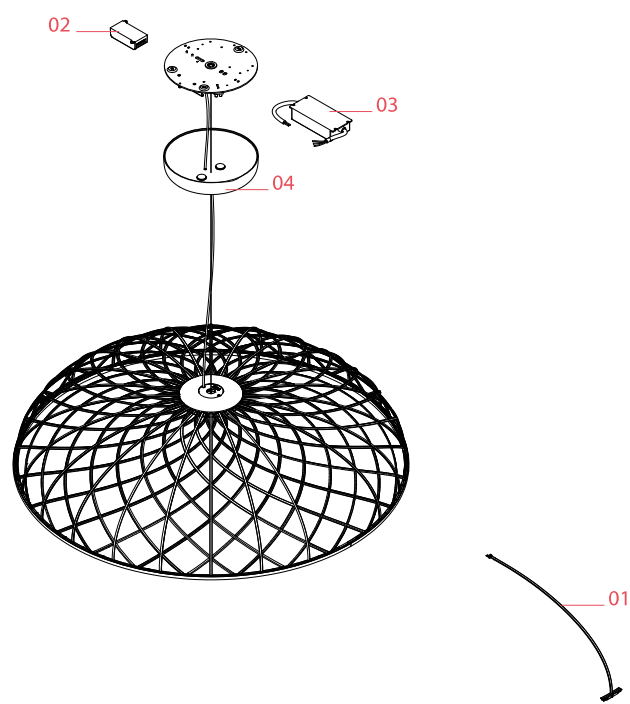

- | | | |
|-----|---|---------|
| 01. | Skynest Almond led arm assembly | RF34719 |
| 02. | Led dimmer kit | RF35452 |
| 03. | Skynest Power Supply 100W 100-277V | RF33061 |
| 04. | Skynest Suspension Rose with Riveted Magnets Almond | RF34382 |



RF34719
Skynest Almond led arm
assembly



RF35452
Led dimmer kit



RF33061
Skynest Power Supply 100W 100-
277V



RF34382
Skynest Suspension Rose with
Riveted Magnets Almond