

FLOS

D301S31C3UAF2 Steel

SuperWire S3


Designed by Formafantasma, 2025

90W - 6450lm - 2700K - CRI> 90



Suspension lamp emitting diffused light. Structure of planar glass panels joined by polished aluminium elements, forming hexagonal modules connected by a polished aluminum element. Equipped with a custom-made light source that emits warm, uniform light along its entire length and can be easily removed for replacement or repair.

Formafantasma's SuperWire is born from the designers' experimentation with LED technology, resulting in a modular collection that merges an industrial attitude with timeless design codes. Stemming from a complex creative process, it reflects the studio's blend of poetic aesthetics with environmental commitment and is a rare example of a lighting design with a removable, replaceable LED light source. The floor version is a tribute to the historic Luminator by the Castiglioni brothers.

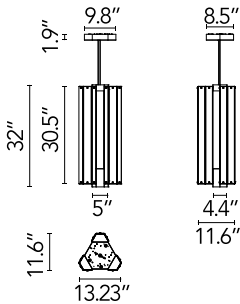

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

EAN	8059607075616
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Filament LED
Power (W)	90
System flux (lm)	6450

Physical

Color	Steel
Length (in)	11.61
Cord length (in)	118.110
Canopy width (in)	8.504
Canopy height (in)	1.850
Net weight (lb)	39.68
Gross weight (lb)	61.07
Package volume (in)	19833.28
IP internal	20

Download


Mounting instructions [Download PDF](#)

Photometric Files

ULD [Download ULD](#)

Technical Drawings

2D [Download ZIP](#)
3D [Download ZIP](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Extreme cut off	No

Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Dimmable
Dimming interface	Dimmer Integrated
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Spare Parts

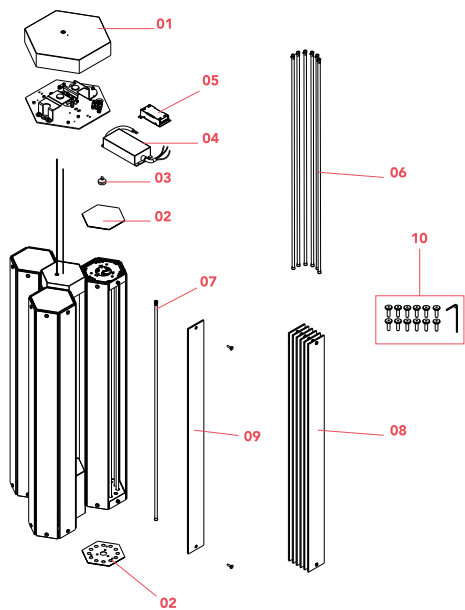

- | | | |
|-----|---|-----------|
| 01. | SuperWire S3 Ceiling rose brill cover | RF301S164 |
| 02. | SuperWire S3 Plate assembly | RF36592 |
| 03. | Super magnet diam. 22 | RF37394 |
| 04. | Skynest Power Supply 100W 100-277V | RF33061 |
| 05. | Led dimmer kit | RF35452 |
| 06. | Superwire Floor/Suspension Led L750 40MA/42VDC/27K filament kit 6 pcs | RF301F500 |
| 07. | Superwire Floor/Suspension Led L750 40MA/42VDC/27K filament | RF301F400 |
| 08. | Superwire Floor/Suspension Long glass plate and bushings kit 6 pcs | RF301F300 |
| 09. | Superwire Floor/Suspension Long glass plate and bushings | RF301F200 |
| 10. | Superwire Kit with special screws | RF301T100 |



RF301S164
SuperWire S3 Ceiling rose brill cover

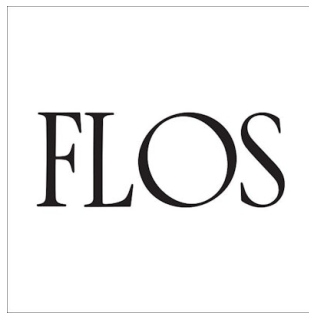

RF36592
SuperWire S3 Plate assembly



RF37394
Super magnet diam. 22



RF33061
Skynest Power Supply 100W 100-277V



RF35452
Led dimmer kit



RF301F500
Superwire Floor/Suspension Led L750 40MA/42VDC/27K filament kit 6 pcs



RF301F400
Superwire Floor/Suspension Led L750 40MA/42VDC/27K filament



RF301F300
Superwire Floor/Suspension Long glass plate and bushings kit 6 pcs



RF301F200

Superwire Floor/Suspension Long
glass plate and bushings



RF301T100

Superwire Kit with special screws