

FLOS

F0303000 Steel

Arco Led

Designed by Achille and Pier Giacomo Castiglioni, 1962

28W - 1224lm - 2700K

Floor lamp emitting direct light via a perforated aluminium diffuser mounted on a stainless-steel telescopic stem. Swivelling and height-adjustable reflector made from pressed, polished and zapon-varnished aluminium. A white Carrara marble base serves as a counterbalance and features a hole for transport with a wooden pole.

Designed in 1962, Arco redefined overhead lighting by eliminating the need for ceiling suspension. A cornerstone of Italian design history, it is among the few objects to have received a Product Lifetime Achievement Award as a globally recognised innovation that has inspired countless imitations. Inspired by street lighting, Achille and Pier Giacomo Castiglioni ingeniously adapted the idea for a domestic setting, challenging traditional notions of home lighting. True to their philosophy, Arco is a masterclass in functional elegance, where every element serves a purpose.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607000991
Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED array
Power (W)	28
System flux (lm)	1224

Physical

Color	Steel
Length (in)	86.61
Cord color	Black
Cord length (in)	90.551
Net weight (lb)	141.32
Gross weight (lb)	154.1
Package volume (in)	14889.42
IP internal	20

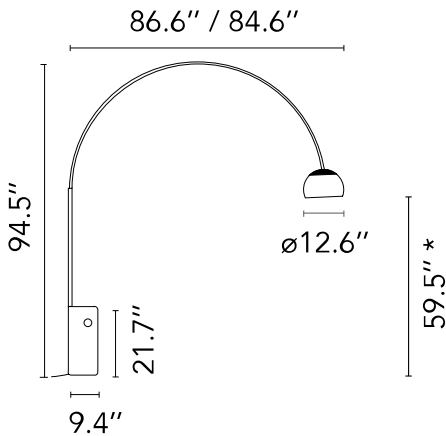

*The diffuser can be adjusted to 67\"/>

Download


Mounting instructions	PDF
Mounting instructions	PDF
Mounting instructions	PDF
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Technical Drawings

2D	ZIP
3D	ZIP

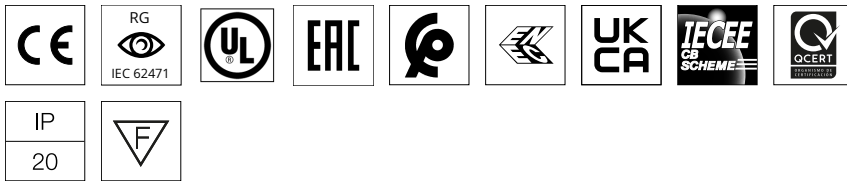

Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
Extreme cut off	No

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type A, Type C, Type G
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D

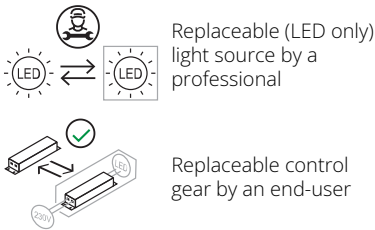

Spare Parts

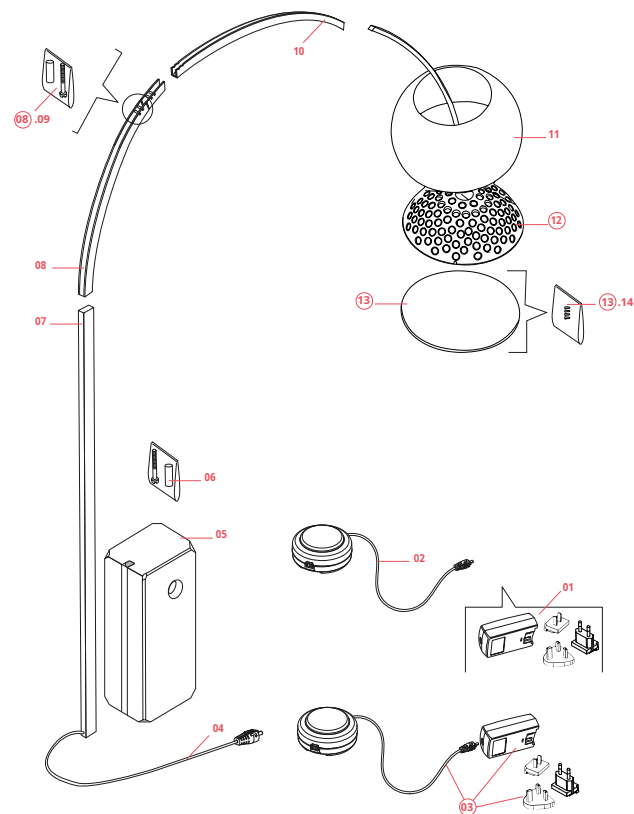

- | | | |
|-----|---|-----------|
| 01. | Black plug assembly kit & 48V driver | RF6600130 |
| 02. | Arco Led Switch dimmer 600Ma for new version | RF26383 |
| 03. | Arco Led Switch dimmer 400mA assembly for old version | RF0303600 |
| 04. | Arco Led Middle electric cable with connectors (EMC) | RF38808 |
| 05. | Marble base | F0310000 |
| 06. | Fixing screw with joint | RF0300100 |
| 07. | Inox stem | RF21041 |
| 08. | Long inox channel | RF02970 |
| 09. | Pins and screw set | RF0300200 |
| 10. | Medium inox channel | RF02971 |
| 11. | Polished reflector | RF00797 |
| 12. | Arco Led Small inox channel with grid and led | RF0303400 |
| 13. | Arco Led Optical led diffuser with fixing screws | RF0303200 |
| 14. | Arco Led Optical led diffuser fixing screws | RF0303300 |



RF6600130
Black plug assembly kit & 48V driver



RF26383
Arco Led Switch dimmer 600Ma for new version



RF0303600
Arco Led Switch dimmer 400mA assembly for old version



RF38808
Arco Led Middle electric cable with connectors (EMC)



F0310000
Marble base



RF0300100
Fixing screw with joint



RF21041
Inox stem



RF02970
Long inox channel



RF0300200

Pins and screw set



RF02971

Medium inox channel



RF00797

Polished reflector



RF0303400

Arco Led Small inox channel with
grid and led



RF0303200

Arco Led Optical led diffuser with
fixing screws



RF0303300

Arco Led Optical led diffuser
fixing screws

FLOS

FU030000 Steel

Arco

Designed by Achille and Pier Giacomo Castiglioni, 1962

Incandescent - 100W

Floor lamp emitting direct light via a perforated aluminium diffuser mounted on a stainless-steel telescopic stem. Swivelling and height-adjustable reflector made from pressed, polished and zapon-varnished aluminium. A white Carrara marble base serves as a counterbalance and features a hole for transport with a wooden pole.

Designed in 1962, Arco redefined overhead lighting by eliminating the need for ceiling suspension. A cornerstone of Italian design history, it is among the few objects to have received a Product Lifetime Achievement Award as a globally recognised innovation that has inspired countless imitations. Inspired by street lighting, Achille and Pier Giacomo Castiglioni ingeniously adapted the idea for a domestic setting, challenging traditional notions of home lighting. True to their philosophy, Arco is a masterclass in functional elegance, where every element serves a purpose.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607010501
Mounting	Floor
Environments	Indoor dry location
Light Source Type	Bulb
Light sources included	No
Lamp category	Incandescent
Lamp type	A
Lamp holders	E26
Number of lamps	1
Power (W)	100

Physical

Color	Steel
Length (in)	86.61
Cord color	Black
Cord length (in)	106.299
Net weight (lb)	141.34
Gross weight (lb)	149.69
Package volume (in)	8106.61
IP internal	20

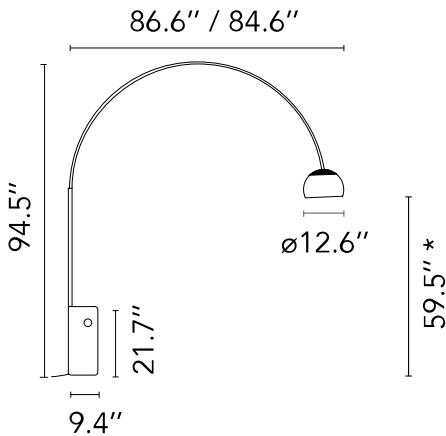

*The diffuser can be adjusted to 67" or 72.8".

Download

Mounting instructions	PDF
Mounting instructions	PDF
Mounting instructions	PDF



IP	IK
20	00


Photometric

Lighting type	Direct
Light distribution	Asymmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	60
Main voltage (Vac)	120
Dimmable	Yes
Dimming interface	Switch Integrated (Remote Dimmable)
Plug type	Type A
Batteries inside	No

Bulbs




NOT INCLUDED


RF36084

11W E26 Silver - Clear LED Lamp

Spare Parts

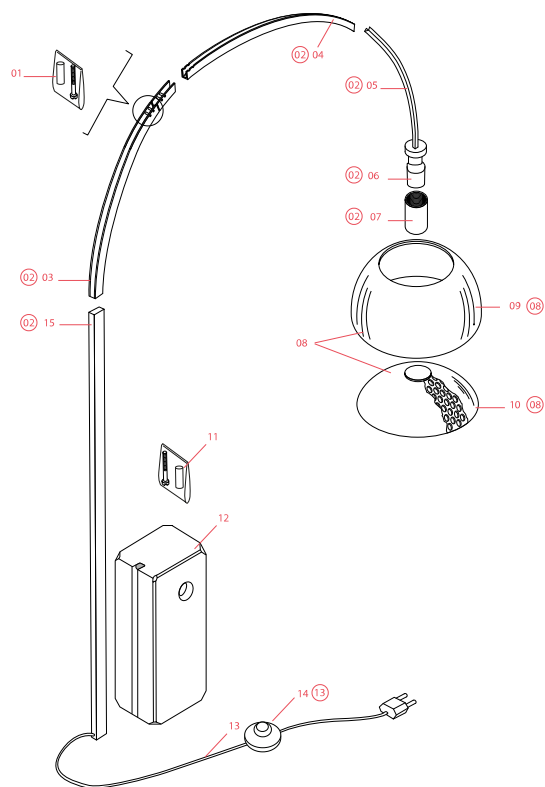


01.	Pins and screw set	RF0300200
02.	Arco Arm Assembly Spare Parts #37 & #15	FU330000
03.	Long inox channel	RF02970
04.	Medium inox channel	RF02971
05.	Arco Small Arm Assembly	RFU030310
06.	Arco E26 Lampholder With Joint And Fixing Screw	RFU030030
07.	Arco Anodized sleeve	RF02593
08.	Arco Shade and Grid	FU320000
09.	Polished reflector	RF00797
10.	Arco Polished grid	RF01411
11.	Fixing screw with joint	RF0300100
12.	Marble base	F0310000
13.	Arco Footswitch And Cord	RF17423
14.	Pedal On/Off Switch In Bronze	RF15858
15.	Inox stem	RF21041



RF0300200

Pins and screw set



FU330000

Arco Arm Assembly Spare Parts
#37 & #15



RF02970

Long inox channel



RF02971

Medium inox channel



RFU030310

Arco Small Arm Assembly



RFU030030

Arco E26 Lampholder With Joint
And Fixing Screw



RF02593

Arco Anodized sleeve



FU320000

Arco Shade and Grid



RF00797

Polished reflector



RF01411

Arco Polished grid



RF0300100

Fixing screw with joint



F0310000

Marble base



RF17423

Arco Footswitch And Cord



RF15858

Pedal On/Off Switch In Bronze



RF21041

Inox stem